

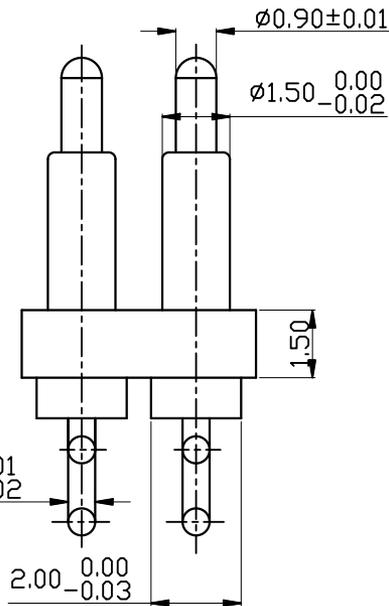


PG2.0-10.6(9.0)-2.1-W0.6折-4P-2R-2.54PH

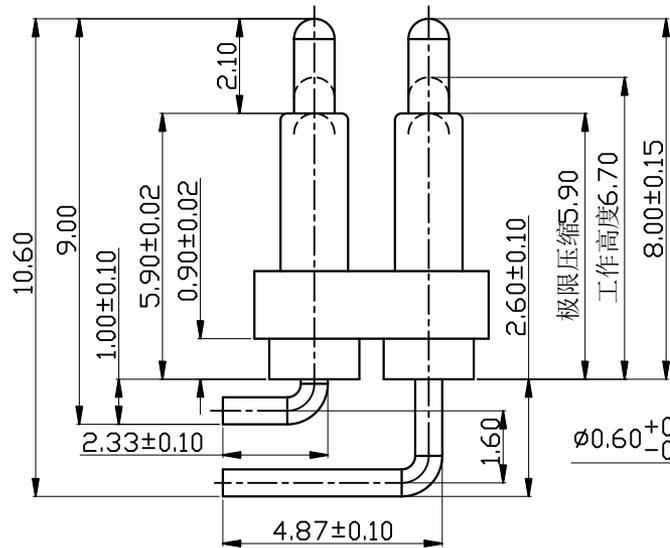

NOTE

1. Material
Plunger: Brass 3604
Barrel: Brass 3602
Spring: SUS304
Housing: PA46
2. Plating
Plunger: Au 1u" over 50~80u" Ni
Barrel: Au 1u" over 50~80u" Ni
Spring: Au 1u" over 50~80u" Ni
3. Electrical
Rated current & voltage: DC 12V;
1.0A Max.
4. Mechanical
Spring force: 80g±20% at normal working height
Durability: 10,000 cycles(minimum)
5. To ensure the best usage, please operate it based on the working height
Based on the engineering drawings, shall not exceed the maximum allowed compression
6. To avoid arcing issue, The adaptor start to power supply after connector mated fully.
7. RoHS compliant product.

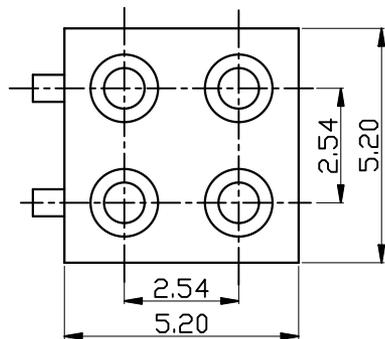

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO.,LTD

第三角法		品名	规格	日期
未注公差参见标准	○ 0.02	pogopin		2017/02/11
0 = ±0.3	◎ #0.03	规格		设计 Mr. Hu
0.0 = ±0.2	⊥ 0.02	材质		审核
0.00 = ±0.1	∕ 0.04	客户		确认
0.000 = -	∕ 0.02	表面处理	镀金	单位 mm
请勿实测图纸		图号	XYX-S0145	比例 1:1 版本 REV:A