




MRK.	DATE	REVISION	SIGN
△			

SPECIFICATION


- Rating : 100mA, 42V DC (Switching)
400mA, 42V DC (None-Switching)
- Contact Resistance : 80mΩ Max
- Insulation Resistance : 100MΩ Min
- Operating Force : 120±30gf Max
- Life cycle : 25,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 1,300Pcs Reel Packing

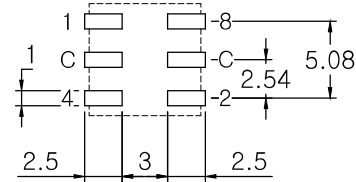




P.C.B DIMENSION (Top View)



		Real Coded					
		C	1	2	4	8	
10 P o s i t i o n	0	●					0
	1	●	●				1
	2	●		●			2
	3	●	●	●			3
	4	●			●		4
	5	●	●		●		5
	6	●		●	●		6
	7	●	●	●	●		7
	8	●				●	8
	9	●	●			●	9

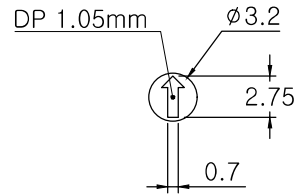

ACTUATOR



DRAW/DESIGNED	CHECKED	APPROVED	UNIT	G.TOL	TITLE	ROTARY DIP SWITCH	
JUN.YANG	DONG.PANG	ZENQ.CHEN		mm	±0.3	MODEL NO.	XB-MSDR-10UK
2023-08-18	2023-08-18	2023-08-18		SCALE	DRAW NO.		03
DONG GUAN XI BANG ELECTRONICS CO.,LTD				SIZE			
				A4			