


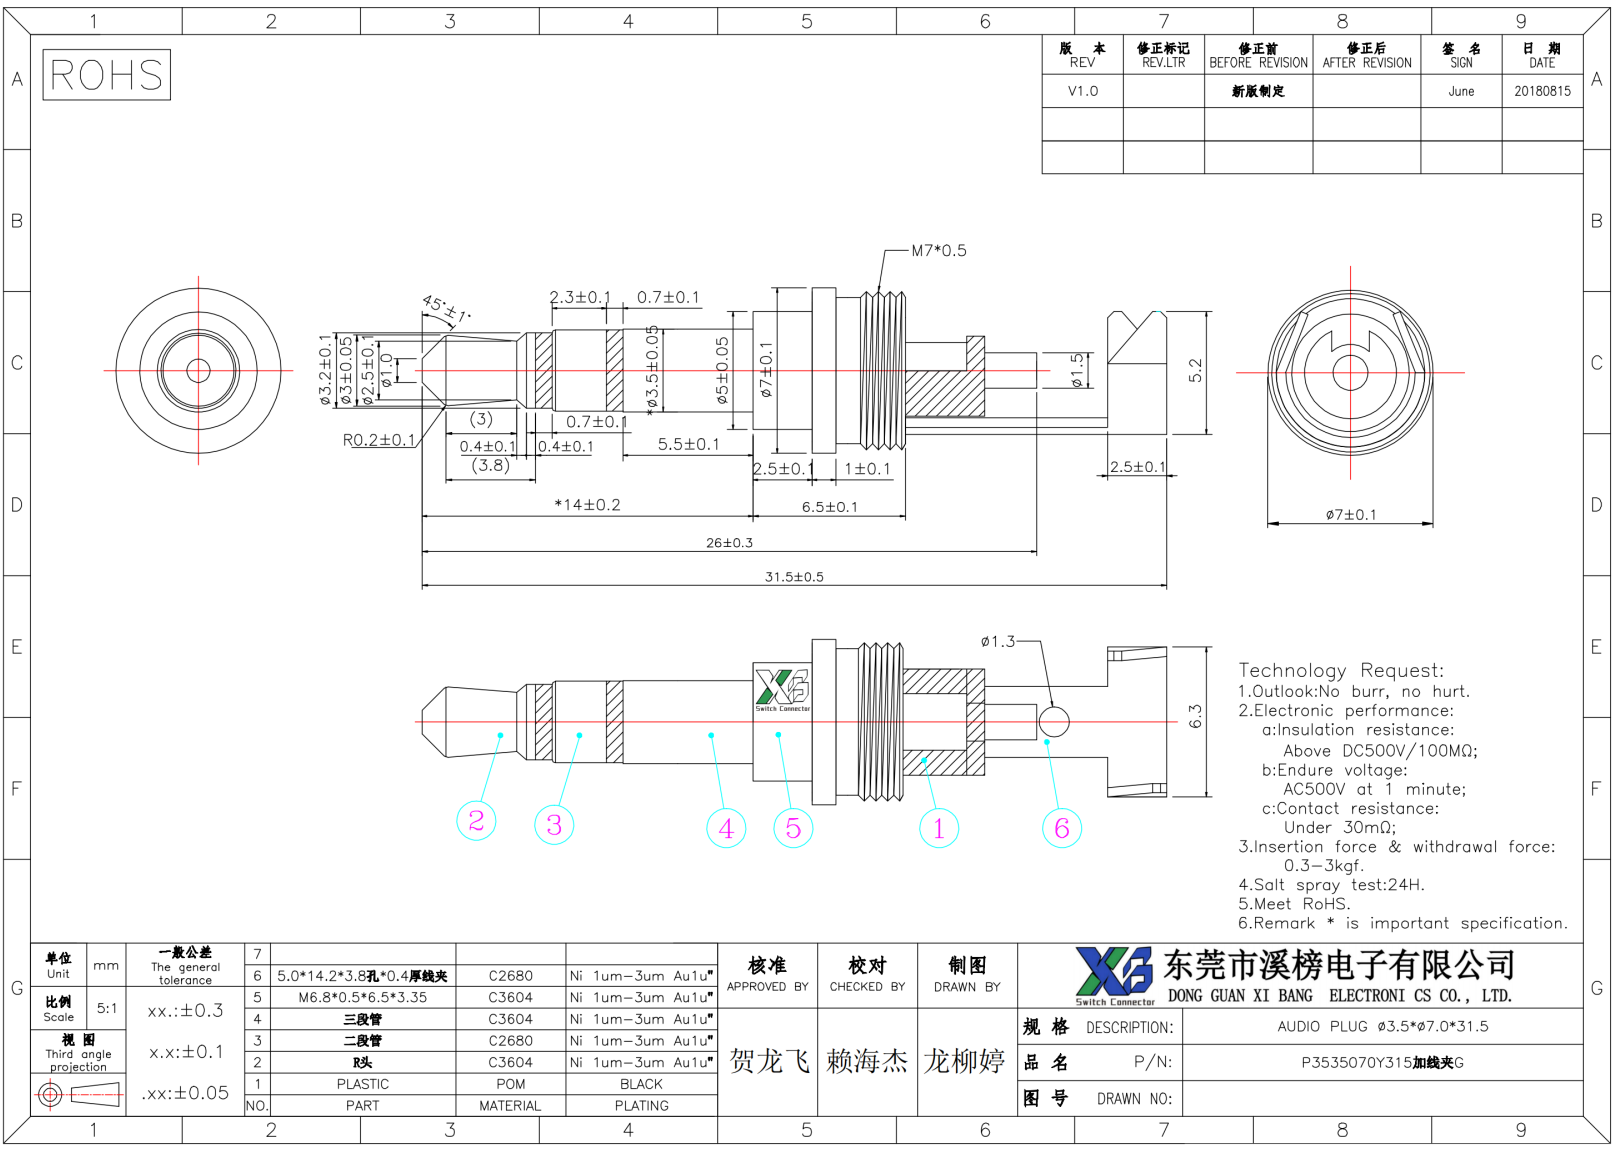

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180815

Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance:
Above DC500V/100MQ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30mQ;
3.Insertion force & withdrawal force:
0.3—3kgf.
4.Salt spray test:24H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			
比例 Scale	5:1	xx.:±0.3	6	5.0*14.2*3.8孔*0.4厚线夹	C2680	Ni 1um—3um Au1u*
			5	M6.8*0.5*6.5*3.35	C3604	Ni 1um—3um Au1u*
			4	三段管	C3604	Ni 1um—3um Au1u*
视图 Third angle projection	x.x:±0.1	.xx:±0.05	3	二段管	C2680	Ni 1um—3um Au1u*
			2	R头	C3604	Ni 1um—3um Au1u*
			1	PLASTIC	POM	BLACK
			NO.	PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
贺龙飞	赖海杰	龙柳婷

规格 品名 图号	DESCRIPTION: P/N: DRAWN NO:
东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	AUDIO PLUG Ø3.5*Ø7.0*31.5
	P3535070Y315加线夹G