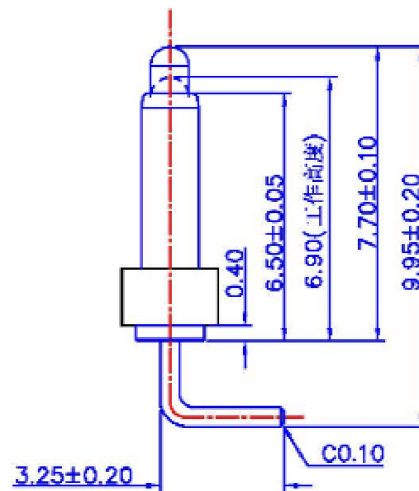
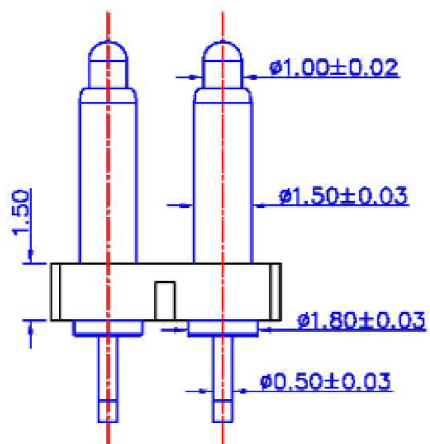


图为焊盘位置和大小

NOTE

1.Material

Plunger: Brass

Barrel: Brass

Spring: SUS

Housing: PA46

2.Plating

Plunger: Au over NI

Barrel: Au over NI

3.Electrical

Rated current & voltage: DC 12V; 2.0A Max.

4.Mechanical

Spring force: 60g±20% at normal working height

Durability: 10,000 cycles(minimum)

5.To ensure the best usage,please operate it based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression

6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

Switch Connector

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 04/01/21

CHECKED BY: Jacky Chen
DATE: 04/01/21

APPROVED BY: Tony Kao
DATE: 04/01/21

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	POGO PIN
SCALE	1 : 1	DWG NO.	XB-PGC-W-300-2PLS-G
SHEET NO.	1 of 1	PART NO.	Thimble Connector

SIZE	A4
VER	R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------