
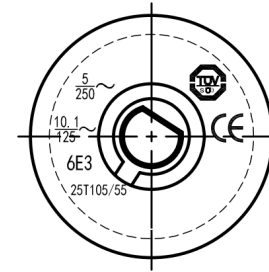
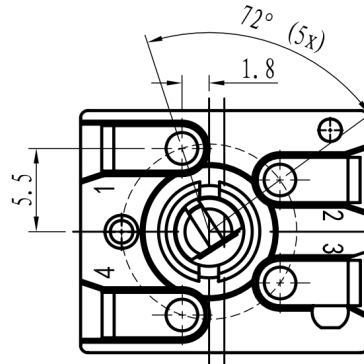
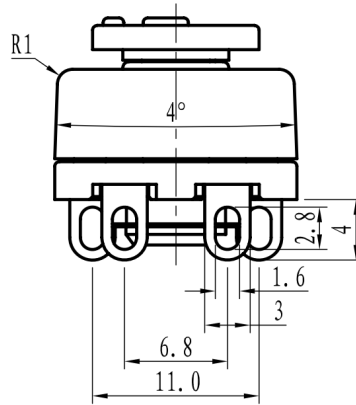
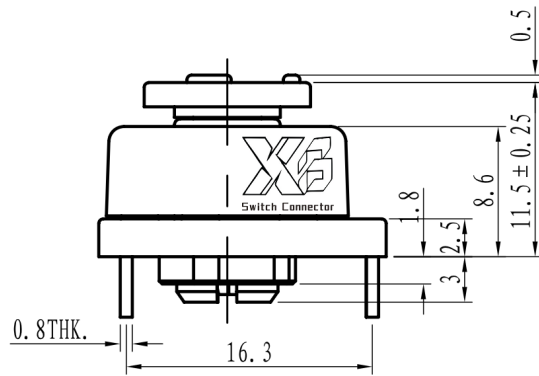


CAD FILE:

ROHS

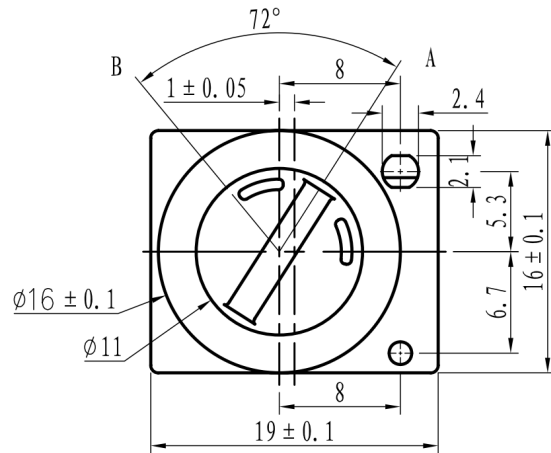

外壳字唛图

电气原理图:
CIRCUIT:

位置/direction	通电状态/electric circuit	
A (顺时针/clockwise)	1-2	3-4
B (逆时针/anticlockwise)	2-3	

技术参数/Specifications

额定参数/Rating	5A 250VAC 10.1A125VAC		
环境温度/Environment Temperature	25T105/55		
接触电阻 Contact Resistance	≤ 30mΩ		
绝缘电阻/Insulation Resistance	≥ 100MΩ (at 500VDC)		
耐电压 Withstand Voltage	针脚-针脚 Terminal-Terminal	1500V AC/10mA/5s	
	针脚-手柄 Terminal-knob	3000V AC/10mA/5s	
电气寿命 Electronical life		6000 Cycles	
操作力 Operating Force		0.5 ~ 1.5Kgf · cm	

NOTE:

TOLERANCE UNLESS OTHERWISE SPECIFIED

X. ± 0.30 . X ± 0.20 . XX ± 0.10

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Rotary Switch		UNIT : mm	DRWG NO.: XB-RS-V22	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-RS-V22		SCALE: 5:1	DWN.	JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		CHK'D	DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK			APPD.	ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					