
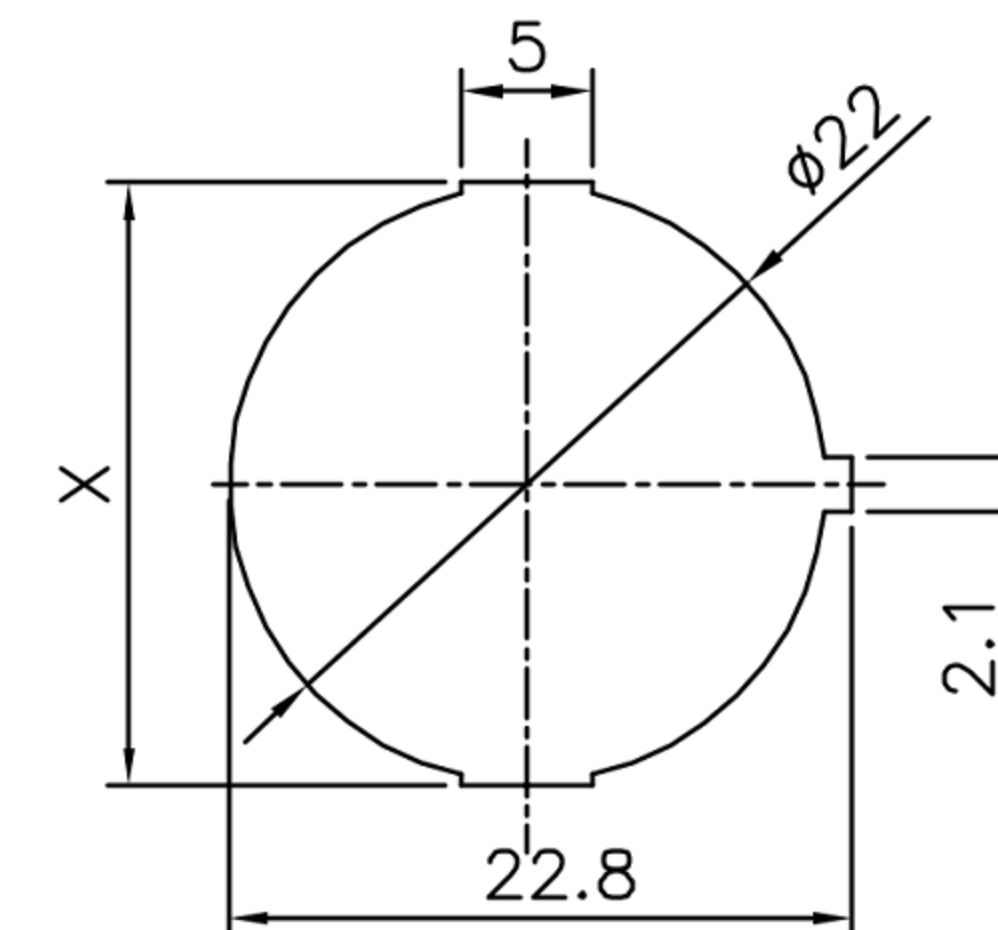
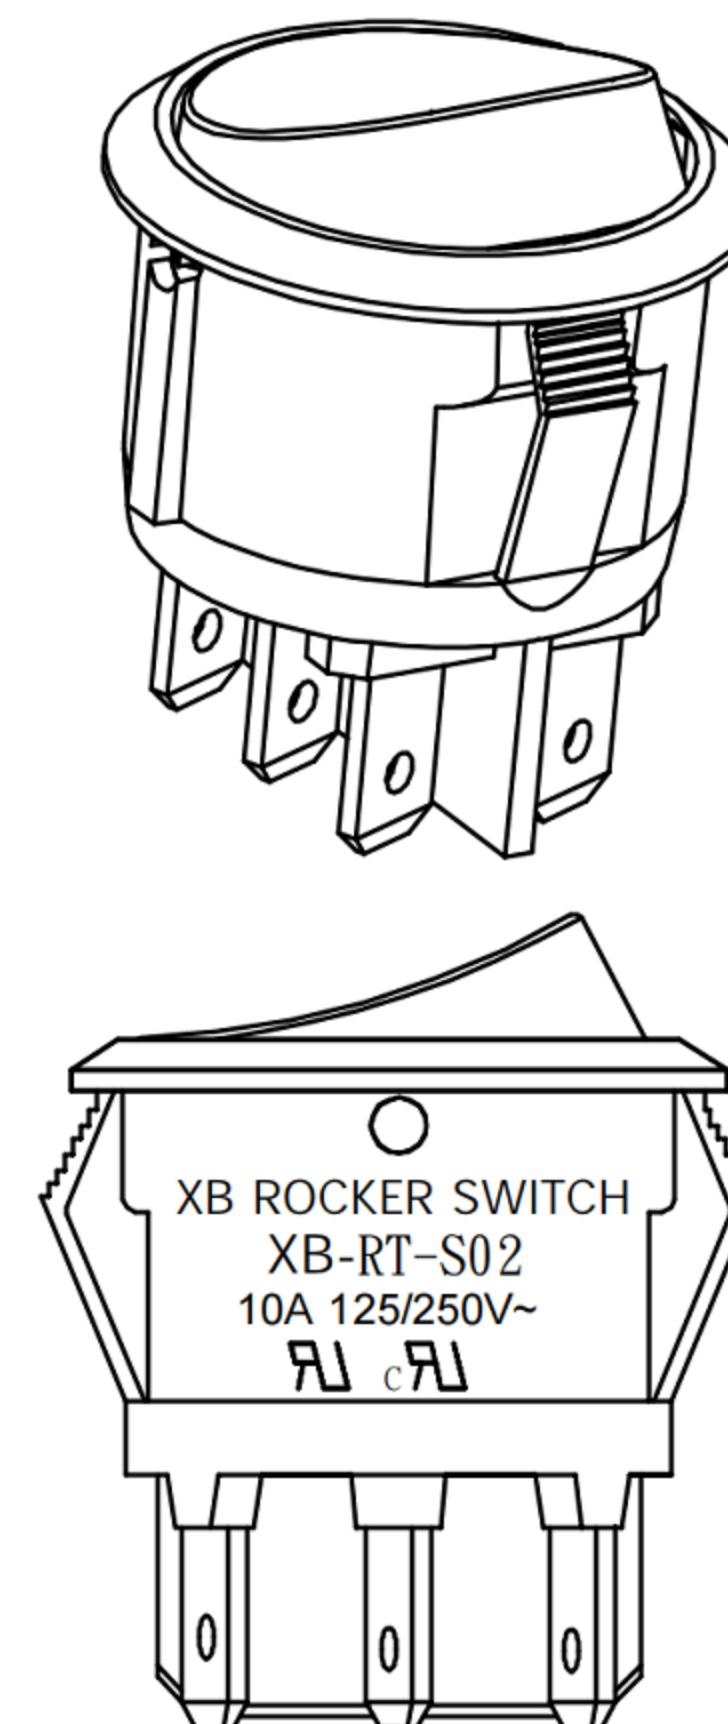


CAD FILE:

ROHS

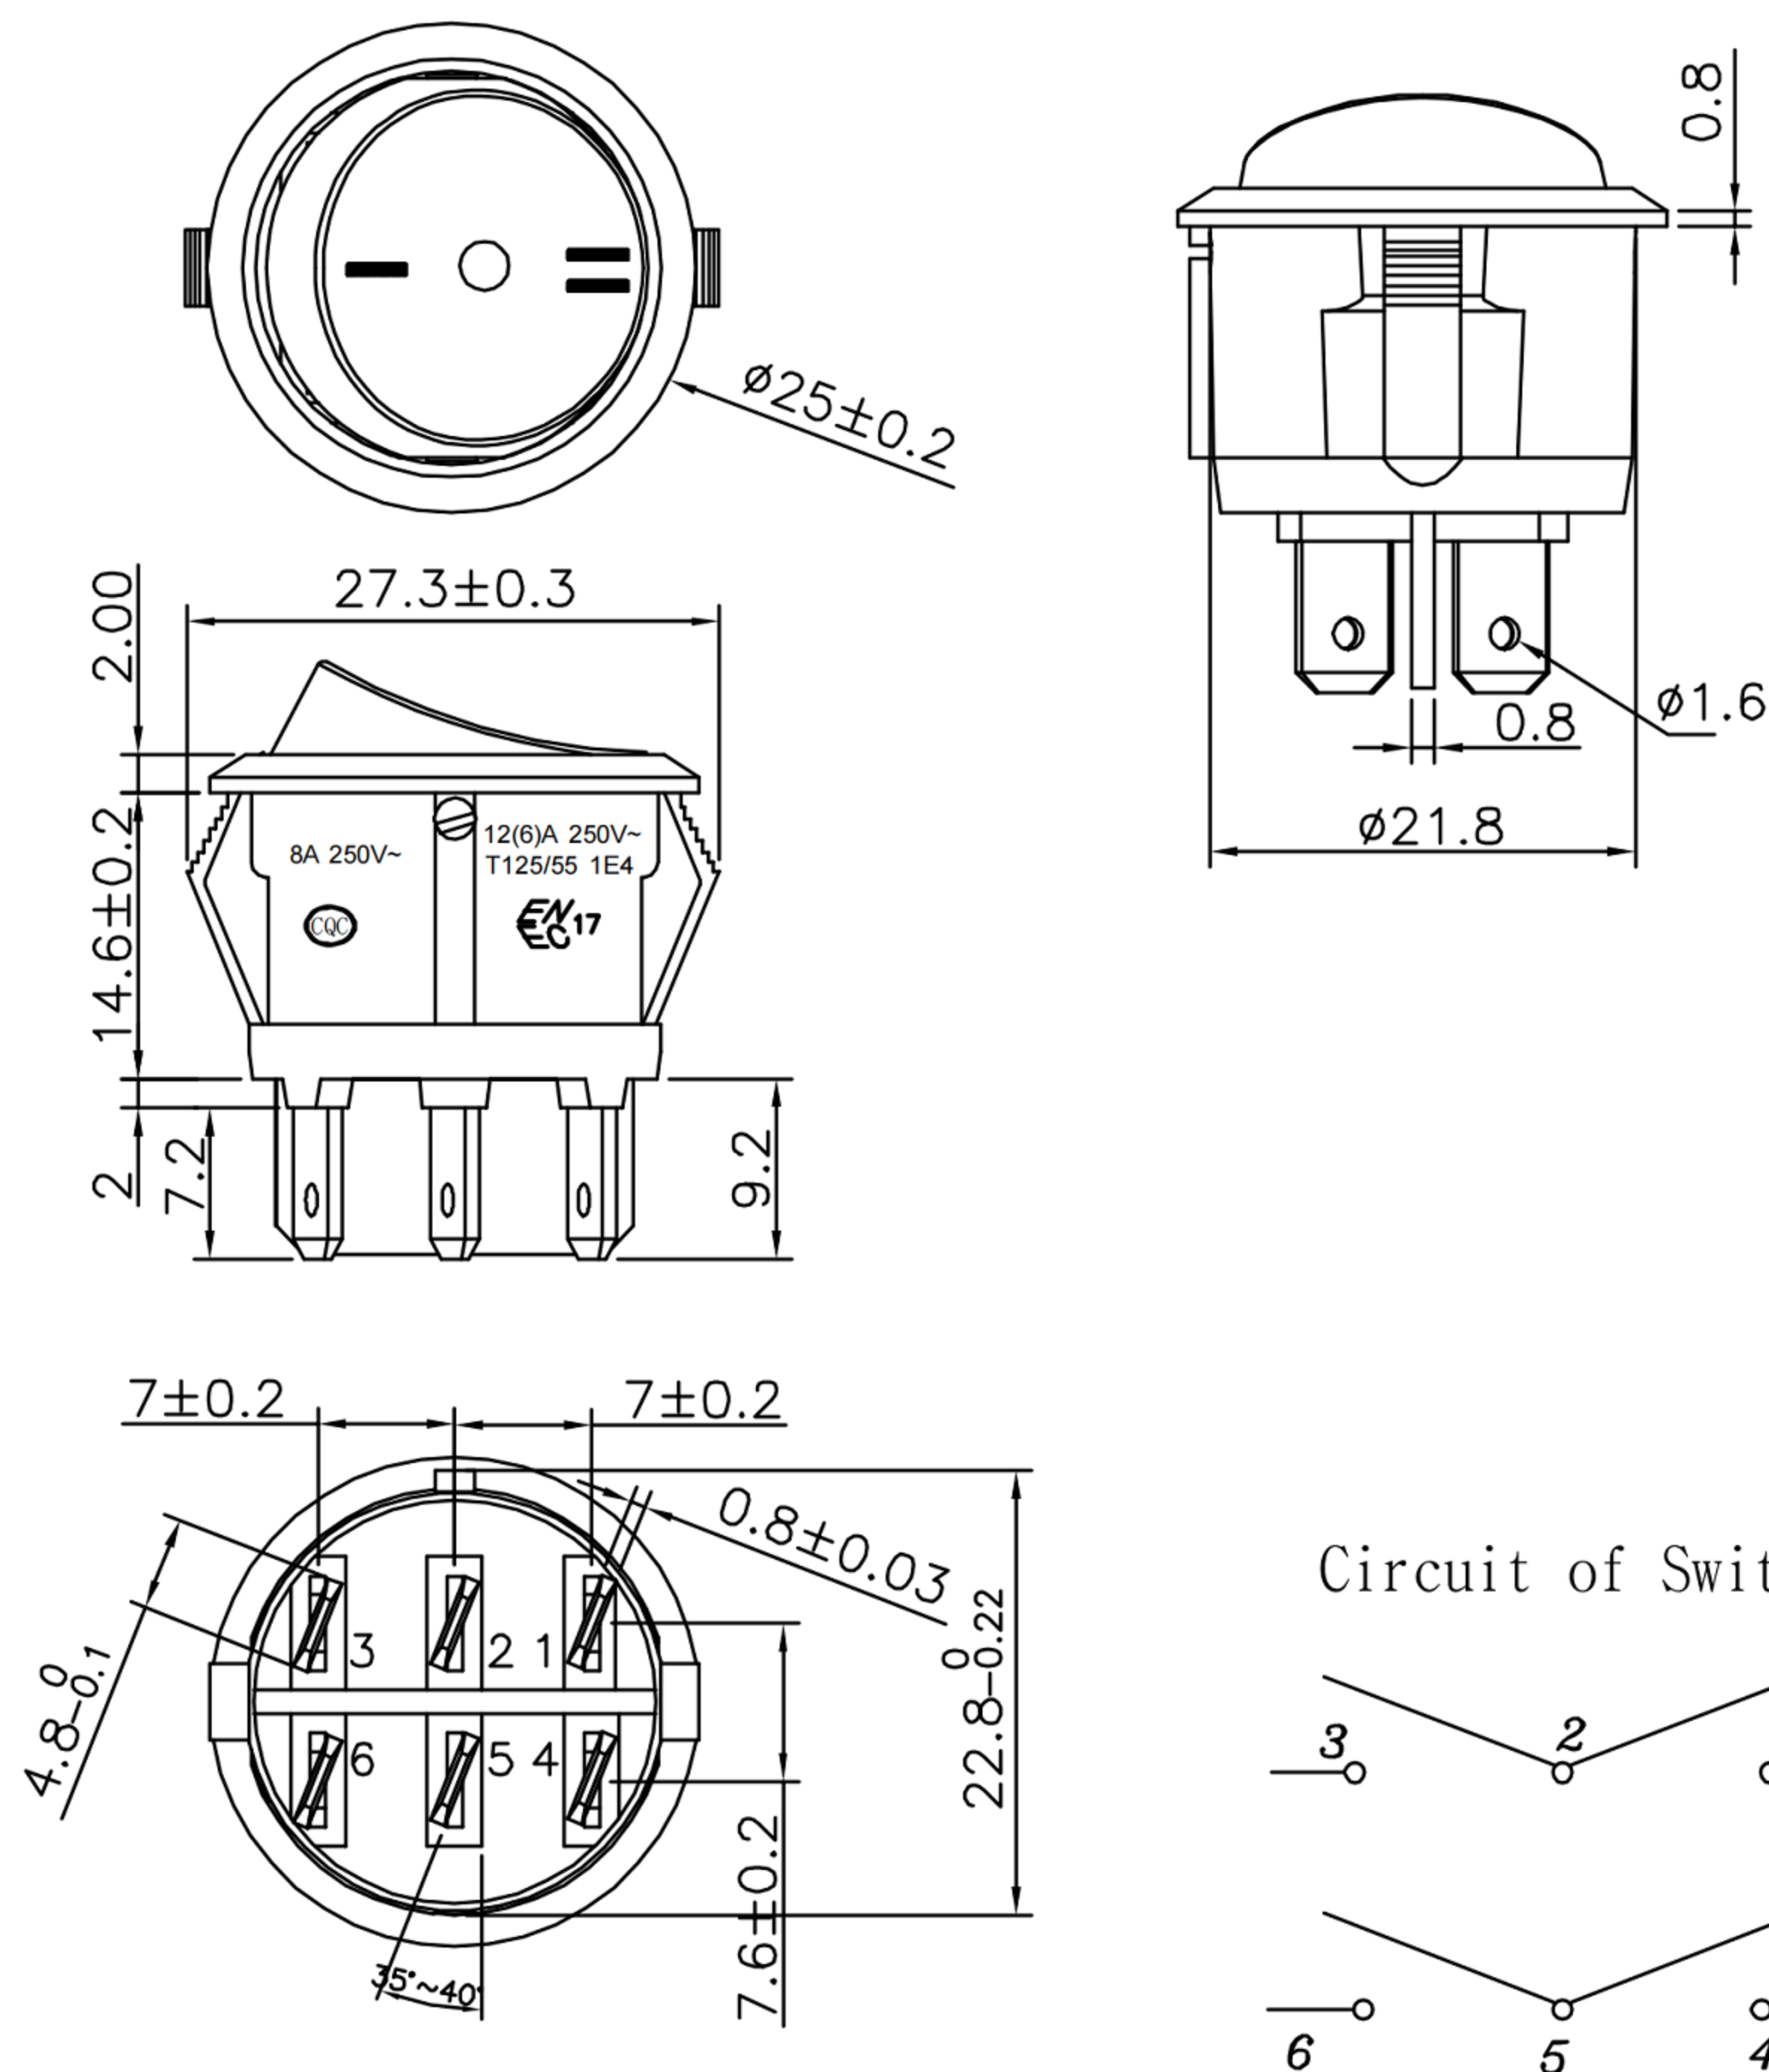

Panel thickness	X
0.75~1.25	22.2
1.25~2.0	22.4
2.0~3.0	22.6

NOTES:

- Rating: 10A 125/250VAC UL&CUL
12(6)A 250VAC T125/55 1E4 ENEC
8A 250VAC CQC
- CIRCUIT: ON-OFF-ON DPDT
- CONTACT RESISTANCE: 50mΩ Max
- INSULATION RESISTANCE: 100MΩ Min, at 500VDC
- WITHSTAND VOLTAGE: 1500VAC 1 Minute

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	DATE	DESCRIPTIONS OF REVISION	APPD.
8					WITHIN 1.5mm : ±0.1mm	2012-9-25	初版	ZENQ. CHEN
7					OVER 1.5mm : ±0.2mm	ISSUE	DATE	APPD.
6								
5								
4	CONTACT	SUS	1	Ag CLAD				
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				
2	COVER	STEEL STRIP	1	Ni PLATED				
1	KNOB	PPA	1	BLACK				