

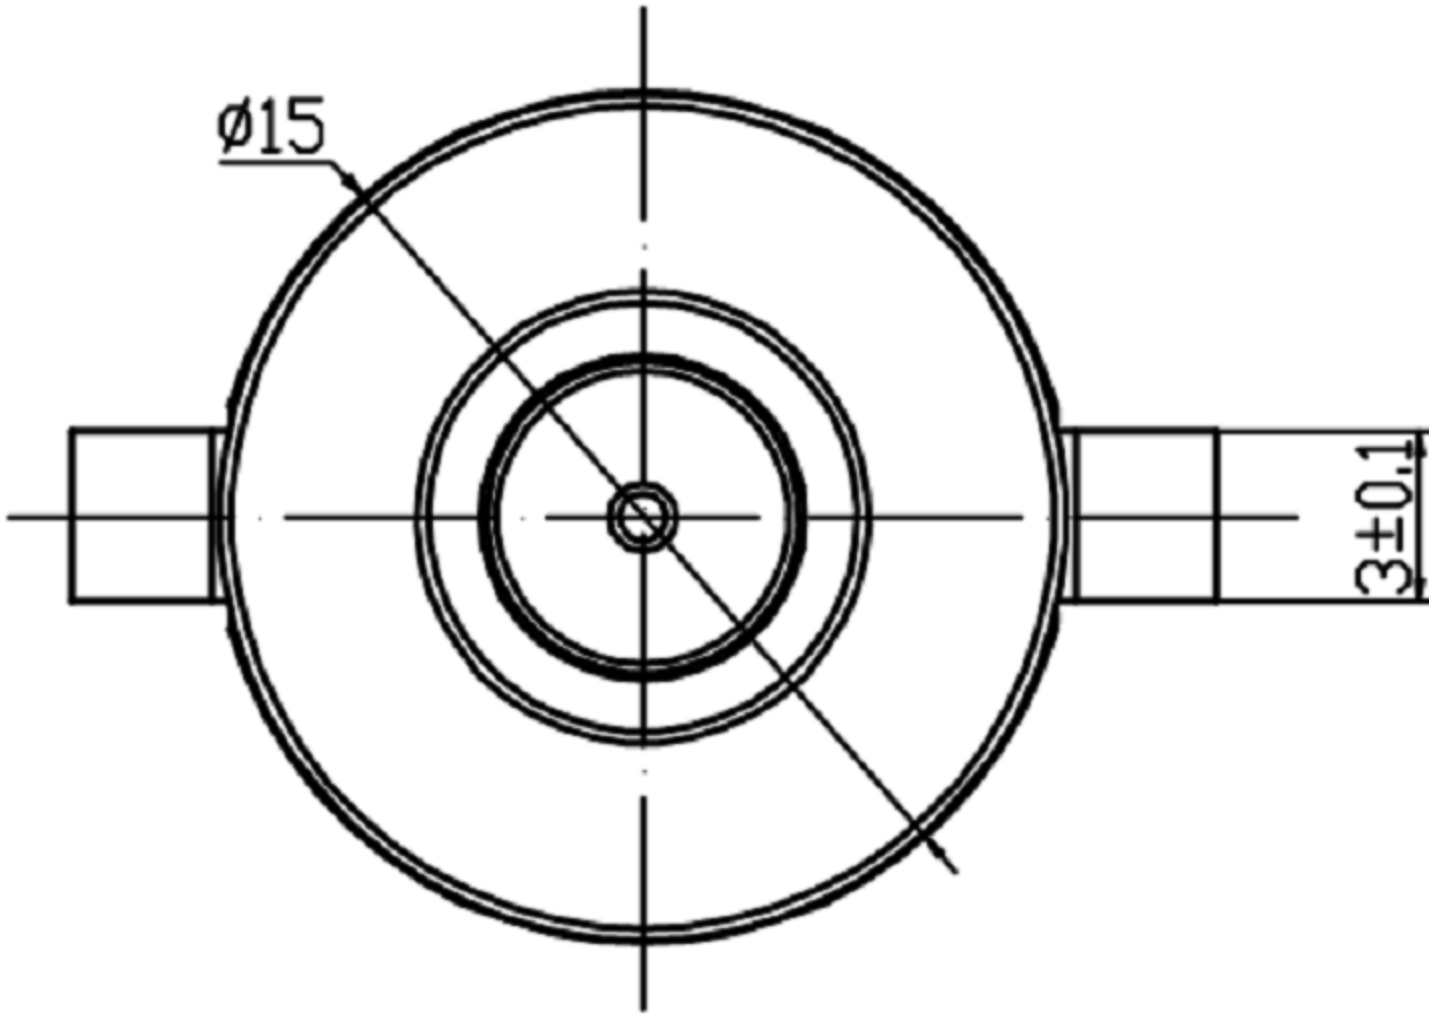


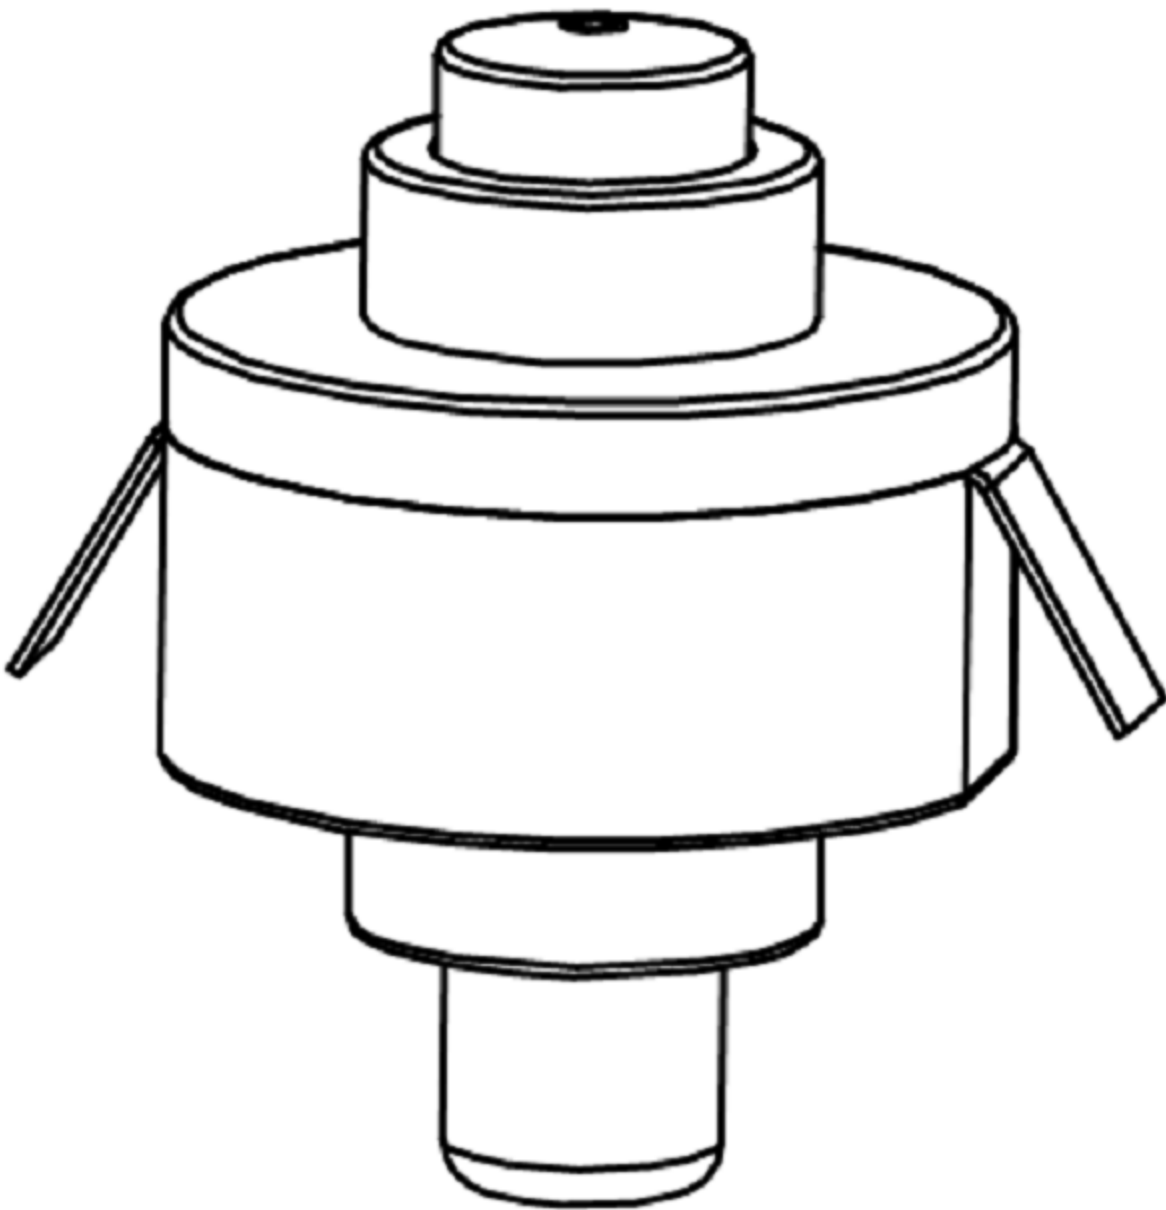

CAD FILE:

ROHS

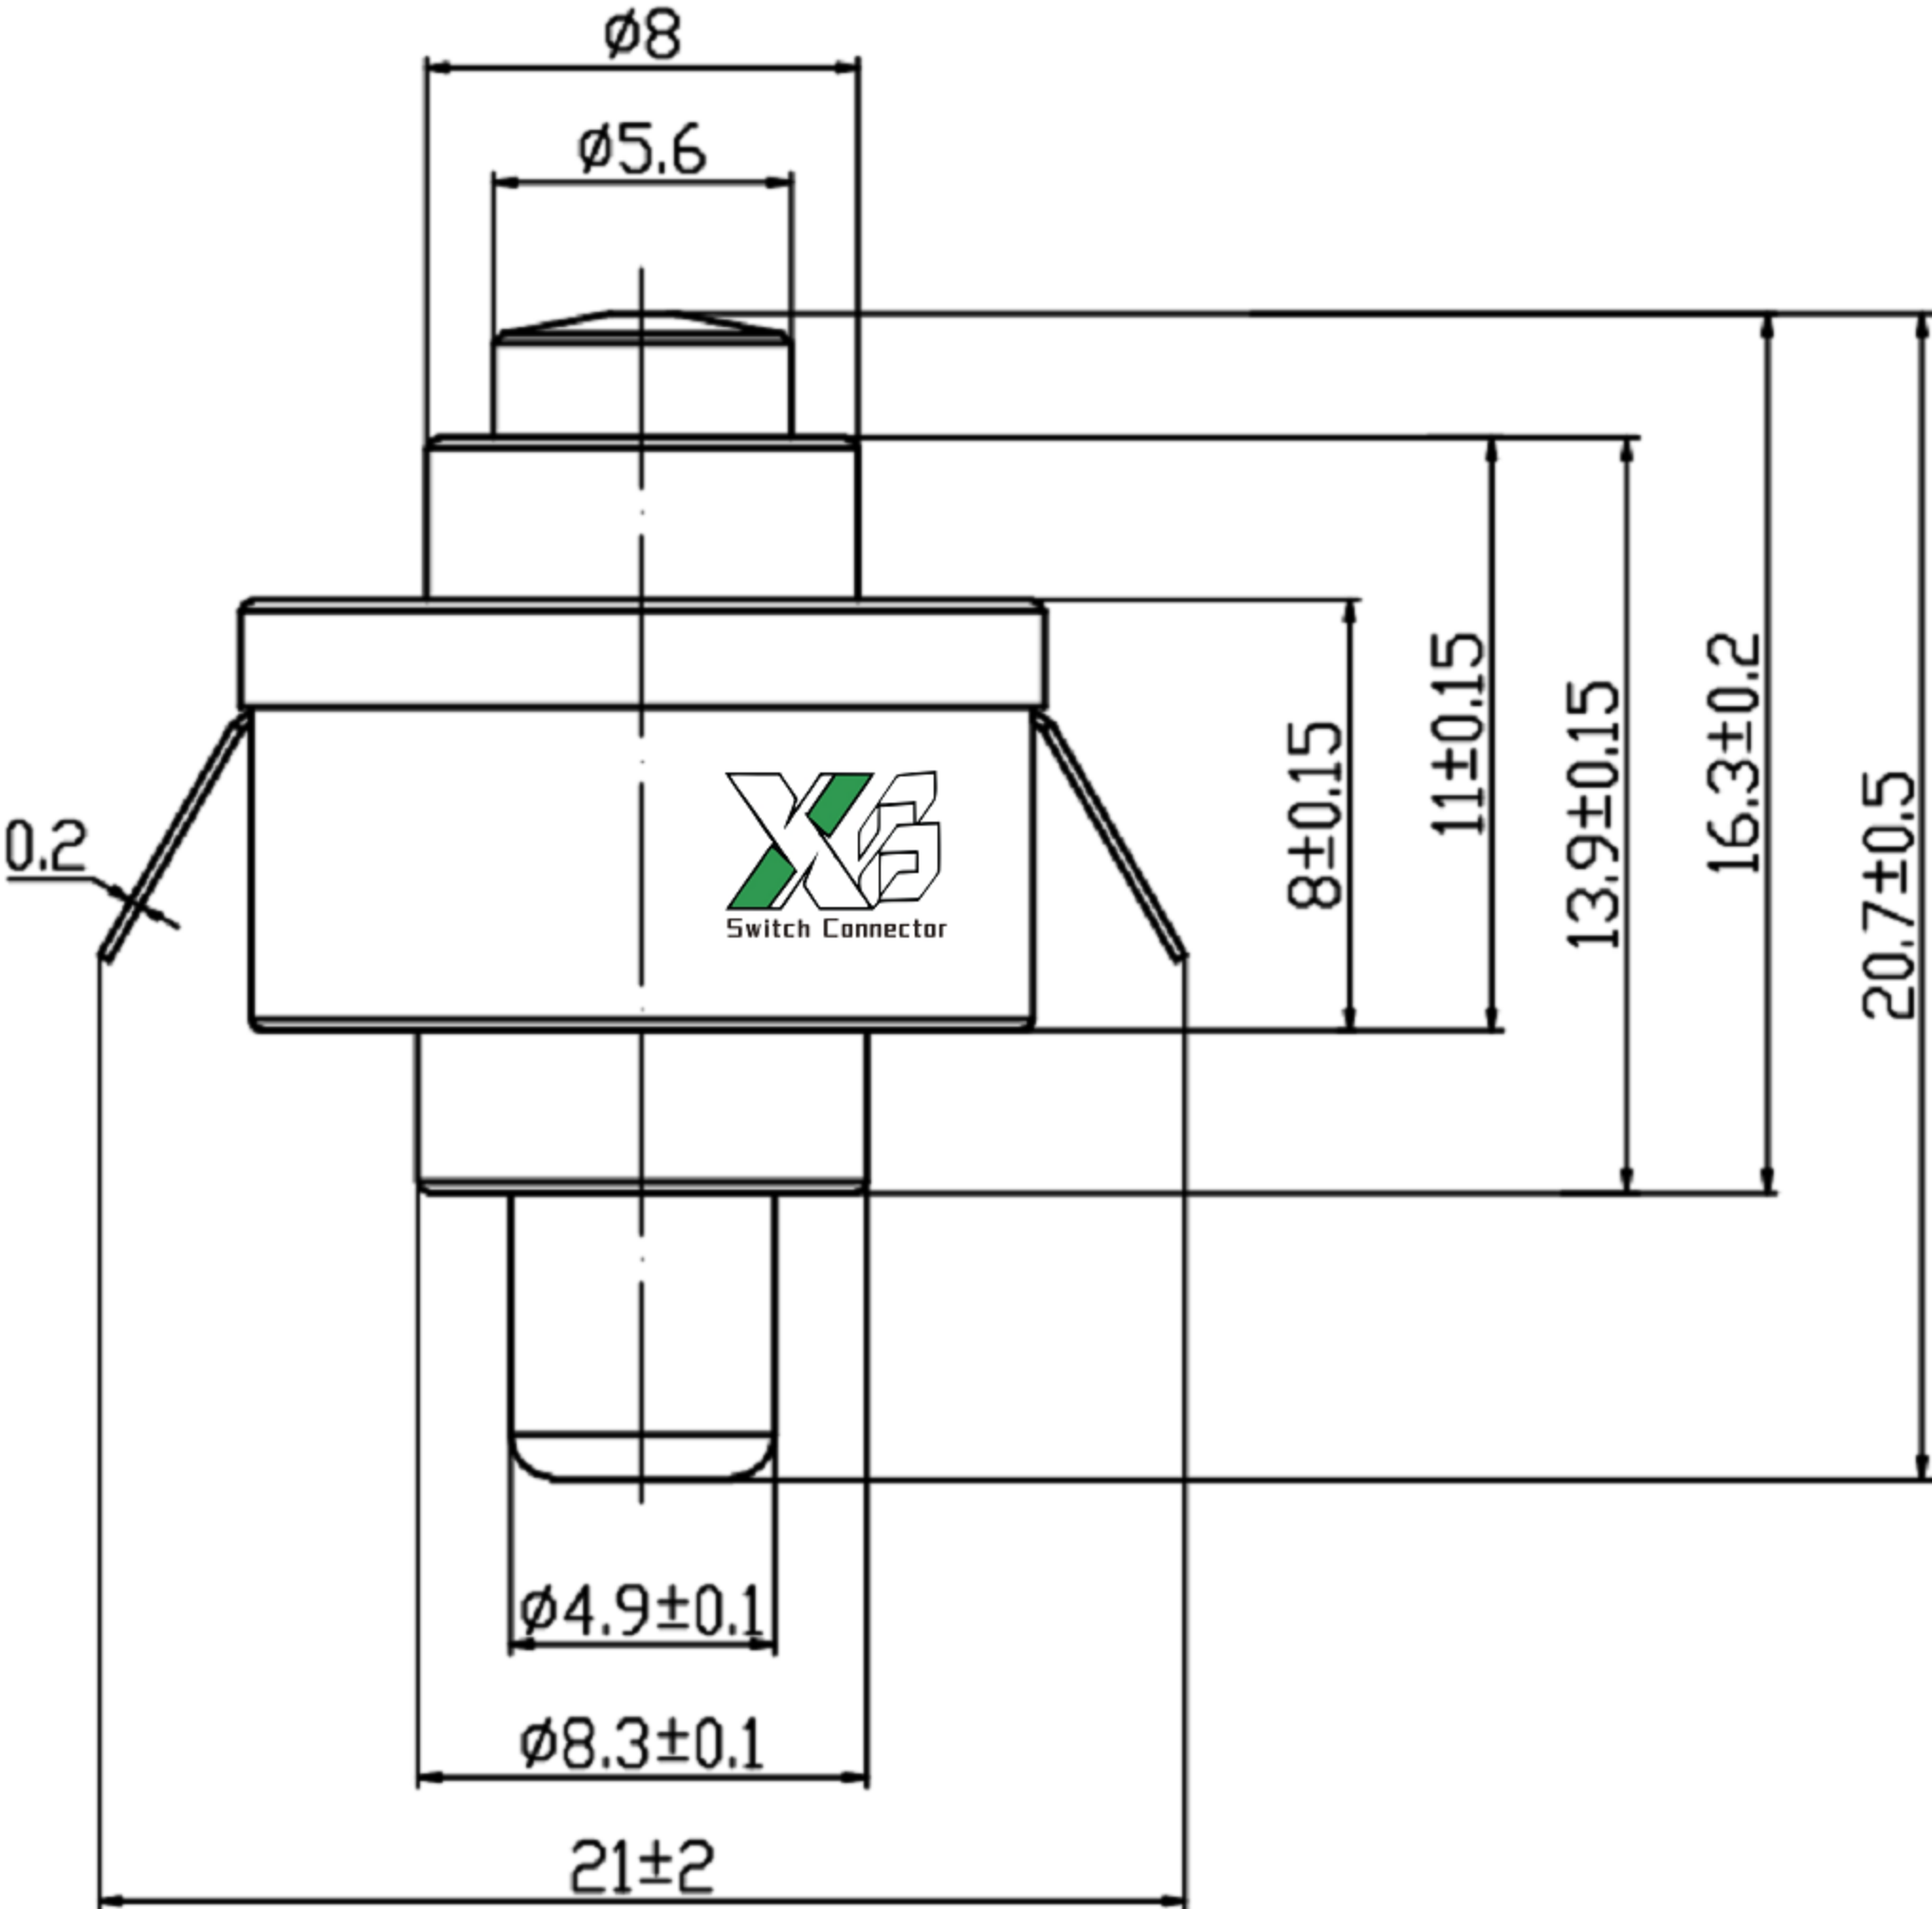

主要技术参数:

使用温度Temperature	-25℃~70℃
接触电阻Contact Resistance	≤200mΩ
绝缘电阻Insulation Resistance	DC500V 100MΩ
额定负荷Rated Load	DC30V 2A
耐压Withstand Voitage	AC500V(50Hz)/min
动作力Press and Return Force	600gf±150gf
机械寿命Life	30000次

一开一关
NO-OFF



CIRCUIT

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Push Switch			UNIT : mm	DRWG NO.: XB-YT-1503R
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-YT-1503R			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				