


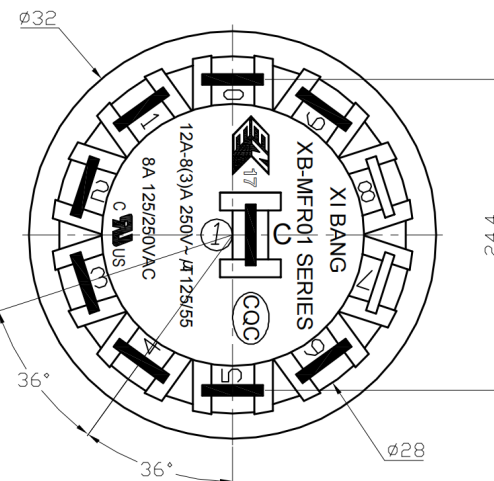
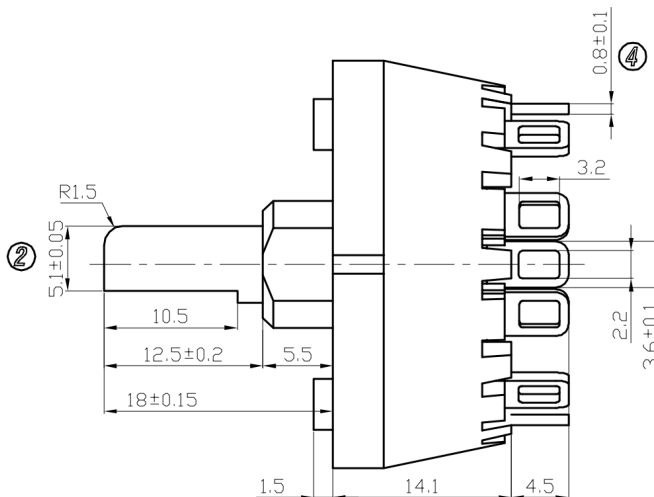


CAD FILE:

ROHS

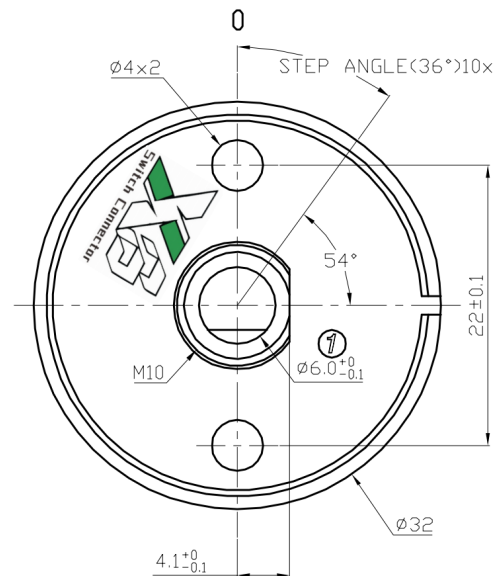


CIRCUIT DIAGRAM

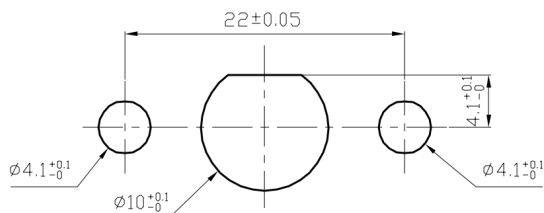

PANEL CUTOUT

螺母配件

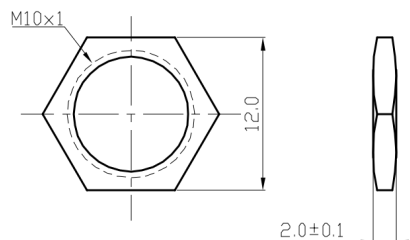

1. 额定值 RATING: 8A 125/250VAC(UL, C-UL)
12A-8(3)A 250V~ μ T125/55 (ENEC-17, CQC, CB)
2. 功能 FUNCTIONAL: 见电路图 SEE CIRCUIT DESCRIPTION
3. 接触电阻 CONTACT RESISTANCE: <50mΩ
4. 绝缘电阻 INSULATION RESISTANCE: >100MΩ
(500VDC BETWEEN OPEN CONTACTS)
5. 耐电压 DIELECTRIC STRENGTH: >1500VAC 0.5mA 1 MINUTE
6. 所有部件均使用环保材料
ALL MATERIALS USE IN CONFORMITY WITH THE RoHS DIRECTIVE
7. "○"表示关键尺寸 DENOTES CRITICAL DIMENSIONS

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED				
8					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
7					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
6									
5									
4	CONTACT	SUS	1	Ag CLAD					
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED					
2	COVER	STEEL STRIP	1	Ni PLATED					
1	KNOB	PPA	1	BLACK					

TITLE : 电源旋转开关		UNIT : mm	DRWG NO. XB-MFR01-A1G06L9SR-B	
MODEL: Power Rotary Switch		SCALE: 5:1	DWN.	JUN. YANG 2012-9-25
东莞市溪榜电子有限公司		CHK'D	DONG. PANG	2012-9-25
DONG GUAN XI BANG ELECTRONICS CO., LTD.		APPD.	ZENQ. CHEN	2012-9-25