





Technical drawing of the X3 Switch Connector. The drawing shows a top view of the component with the following dimensions and labels:



- Overall Width:** 8.6
- Overall Height:** 4.3 * b
- Bottom Flange Height:** 3.0
- Bottom Flange Width:** 2.0 * a
- Bottom Flange Thickness:** 2.0
- TRAVEL:** Indicated by a vertical dimension line on the left side of the bottom flange.
- Labels:** A triangle with the letter 'B' is located above the component. A circle with the number '1' is located to the left of the component, with a line pointing to the top-left corner.
- Logo:** The X3 Switch Connector logo is located on the right side of the component.

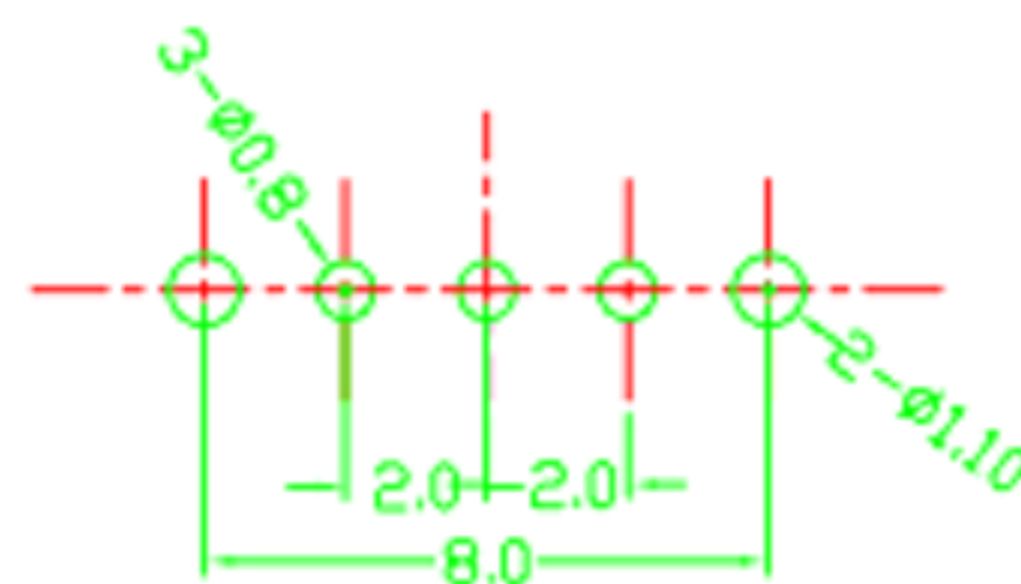

PIERCING PLAN

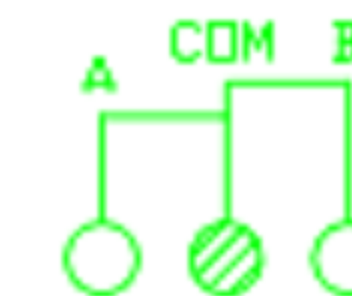

SCHEMATIC (1P2T)

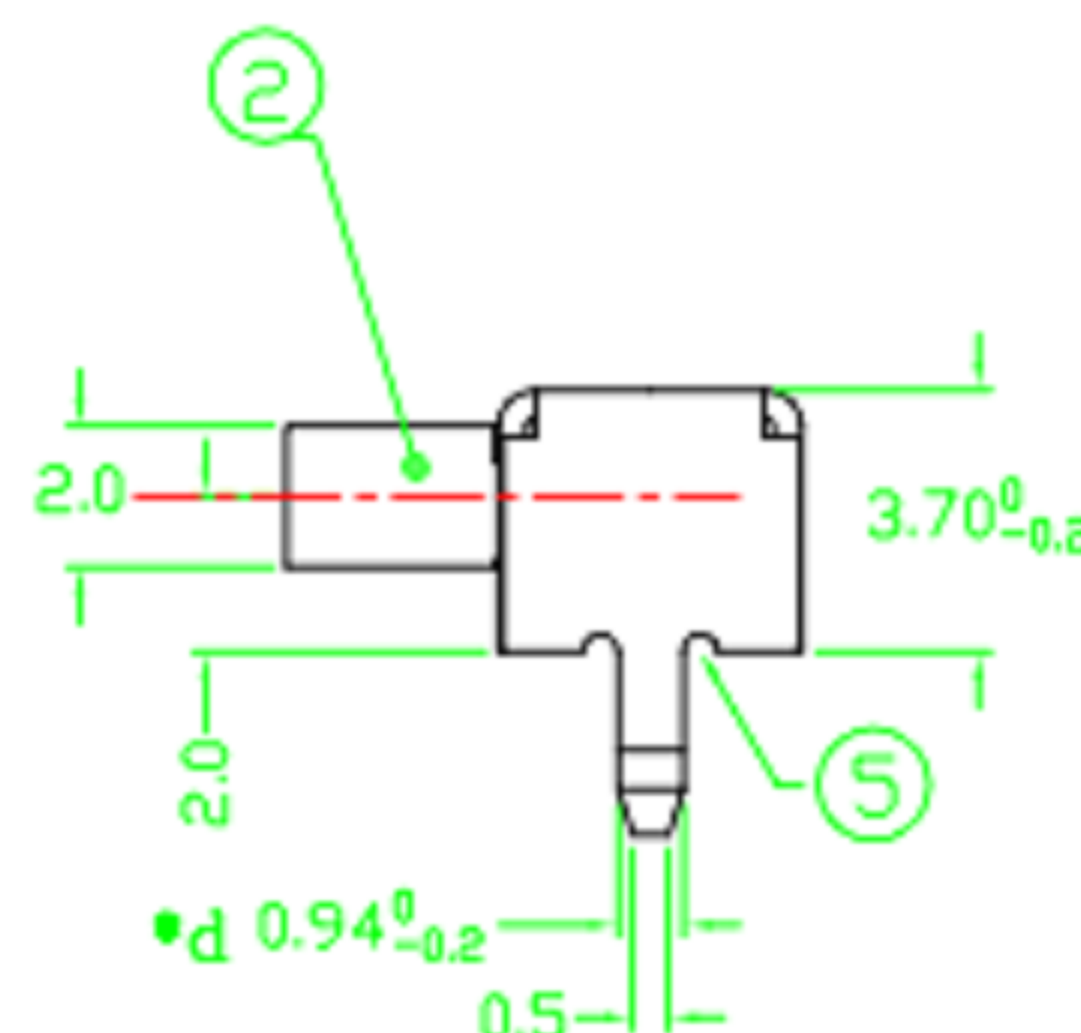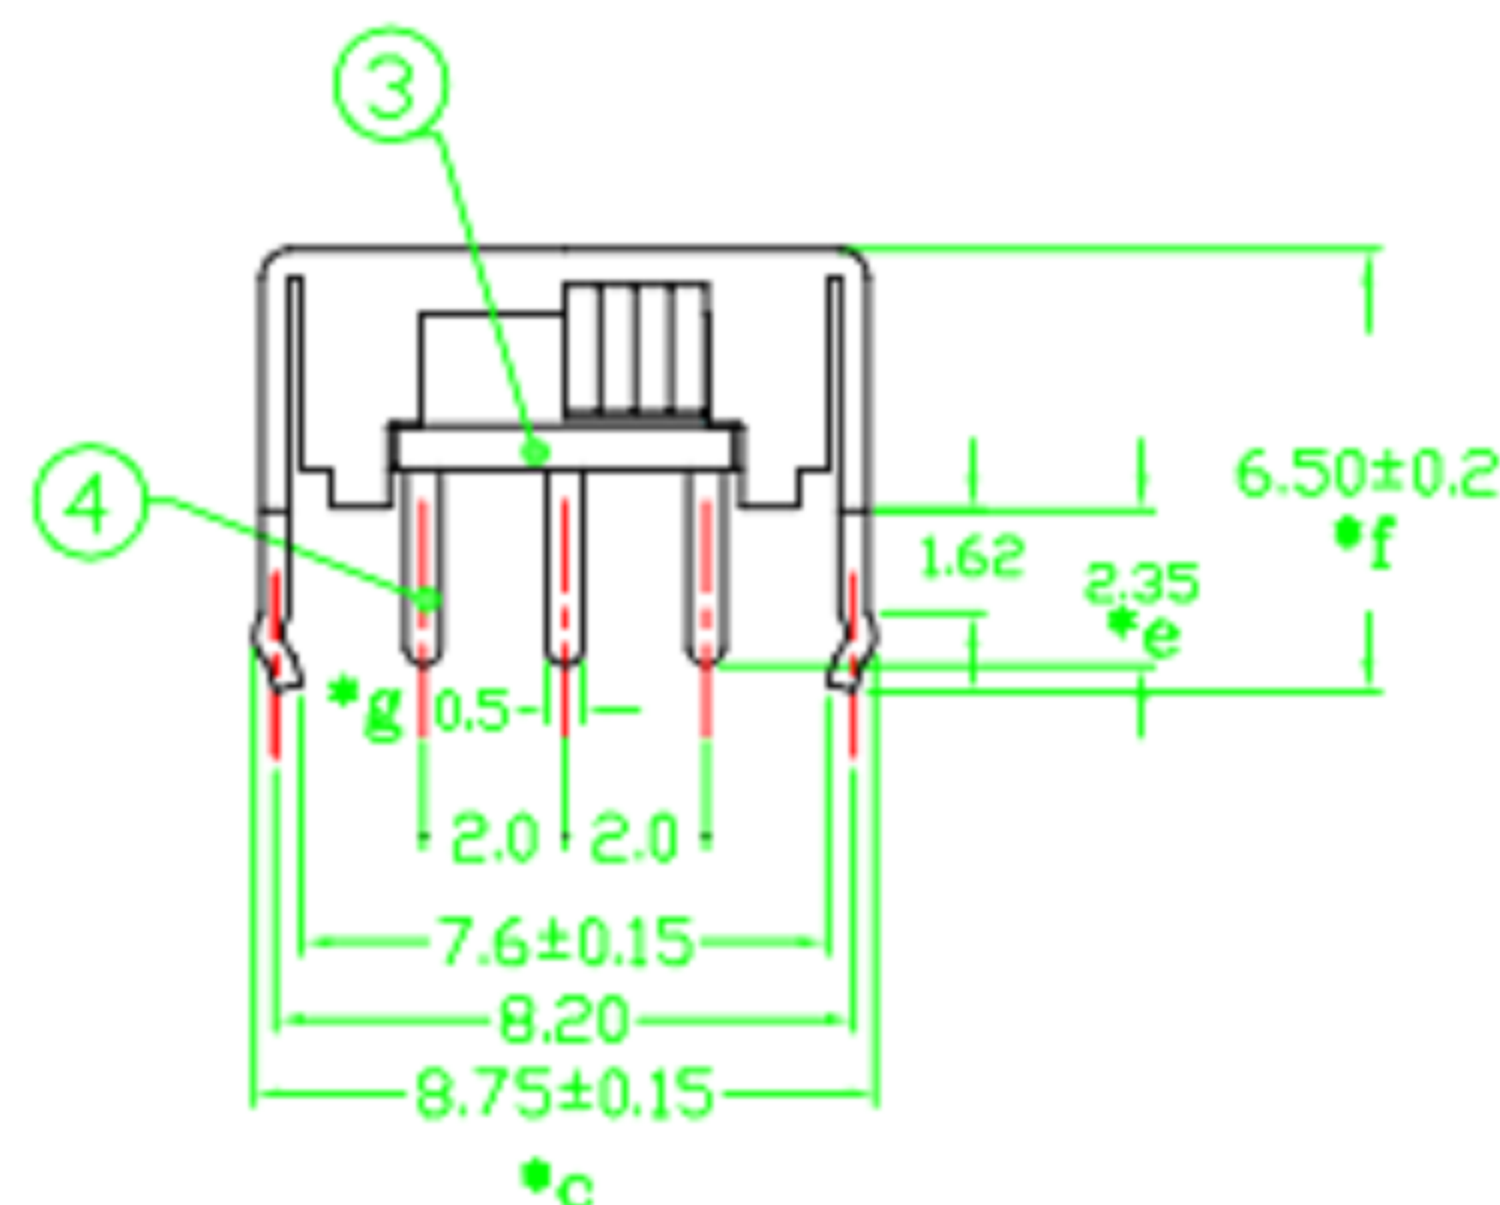

- 1.XB Slide Switch electrical parameters
2. Rating : DC 12V 30V 0.3A 0.5A
3. Circuit : 1P2T
- 4.Operating gear:2rd gear
5. Travel : 2.0mm
6. Operating Force : T1-2 : 250 ± 100 gf
- 7.Contact resistance: 30M Ω
- 8.Withstand voltage: 500V AC for 1 minute
- 9.Handle length: 2.0-10mm
10. Terminal : P.C. Board Terminal

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : SLide Switch			UNIT : mm	DRWG NO.: XB-SK-12D36		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-SK-12D36			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH							