

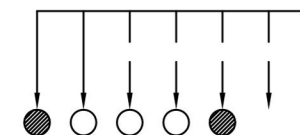
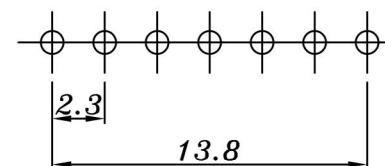


规格 Specification:

1. 额定值 Rating:DC 50V 0.3A
2. 接触电阻 Contact resistance: $\leq 100\text{ m}\Omega$
3. 绝缘电阻 Insulation resistance: $\geq 100\text{ M}\Omega$ (DC 250V/Min)
4. 电气寿命 Electronics life: 5000 cycles
5. 操作力 Operation force: $250\pm 100\text{gf}$
6. 所有材料符合Rohs要求 All materials are Rohs compliant

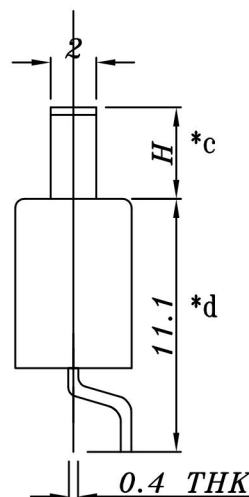

SCHEMATIC (SHORTING)

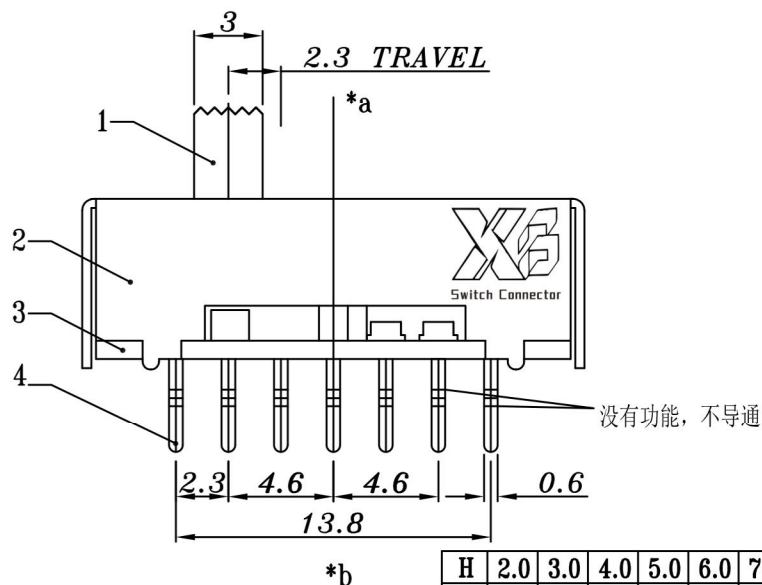

**P.C.B LAYOUT
BOTTOM VIEW**

注：“*”表示关键尺寸（4个）。

H	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
							✓				

					TOLERANCE UNLESS SPECIFIED											
7	SPRING	STEEL WIRE	1	NATURAL	UP TO 5mm:±0.1 ABOVE 5mm:±0.2	ANGULAR ±1°	1									
6	STEEL BALL	STEEL	1	NATURAL												
5	CONTACT CLIP	PBS STRIP	1	Ag CLAD			NO	DATE	REVISIONS			BY	APPD			
4	TERMINAL	BRASS STRIP	7	Ag PLATED	TITLE: VERTICAL SLIDE SWITCH				UNIT : MM		ROHS COMPLIANT	DWN	CHEN. ZENQ			
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: XB-SS-13E/14E/15E-M01				SCALE: 1:1			CHK'D	PANG. DONG			
2	FRAME	STEEL STRIP	1	Ni PLATED	XB 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.							APPD	YANG. JUN			
1	KNOB	PA66	1	BLACK												
NO.	PART NAME	MATERIAL	QTY	FINISHING									PRO.AGL:			REV :A0