
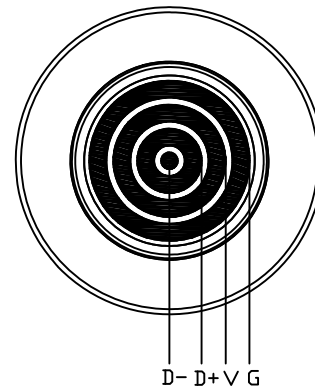
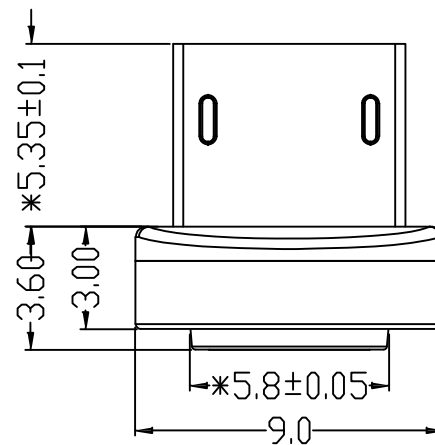


RoHS

参数:

1. 端子接触点镀金0.4U以上
2. 插拔次数10000次
3. 电流5V2.1A快充, 耐压峰值18V
4. N40强磁
5. 盐雾24H



ENGINEERING DRAWING

APPROVED:

CHECKED:

DRAWING:



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCES

.X: ± 0.20
.XX: ± 0.10
.XXX: ± 0.05
ANGEL: $\pm 3.0^\circ$
SHEET: 1 OF 1

TITLE:

PART NO:

DWG NO:

REV: A0

4PIN MICRO 磁吸头

UNIT:mm

SCALE: 1:1

SHEET: A4

