


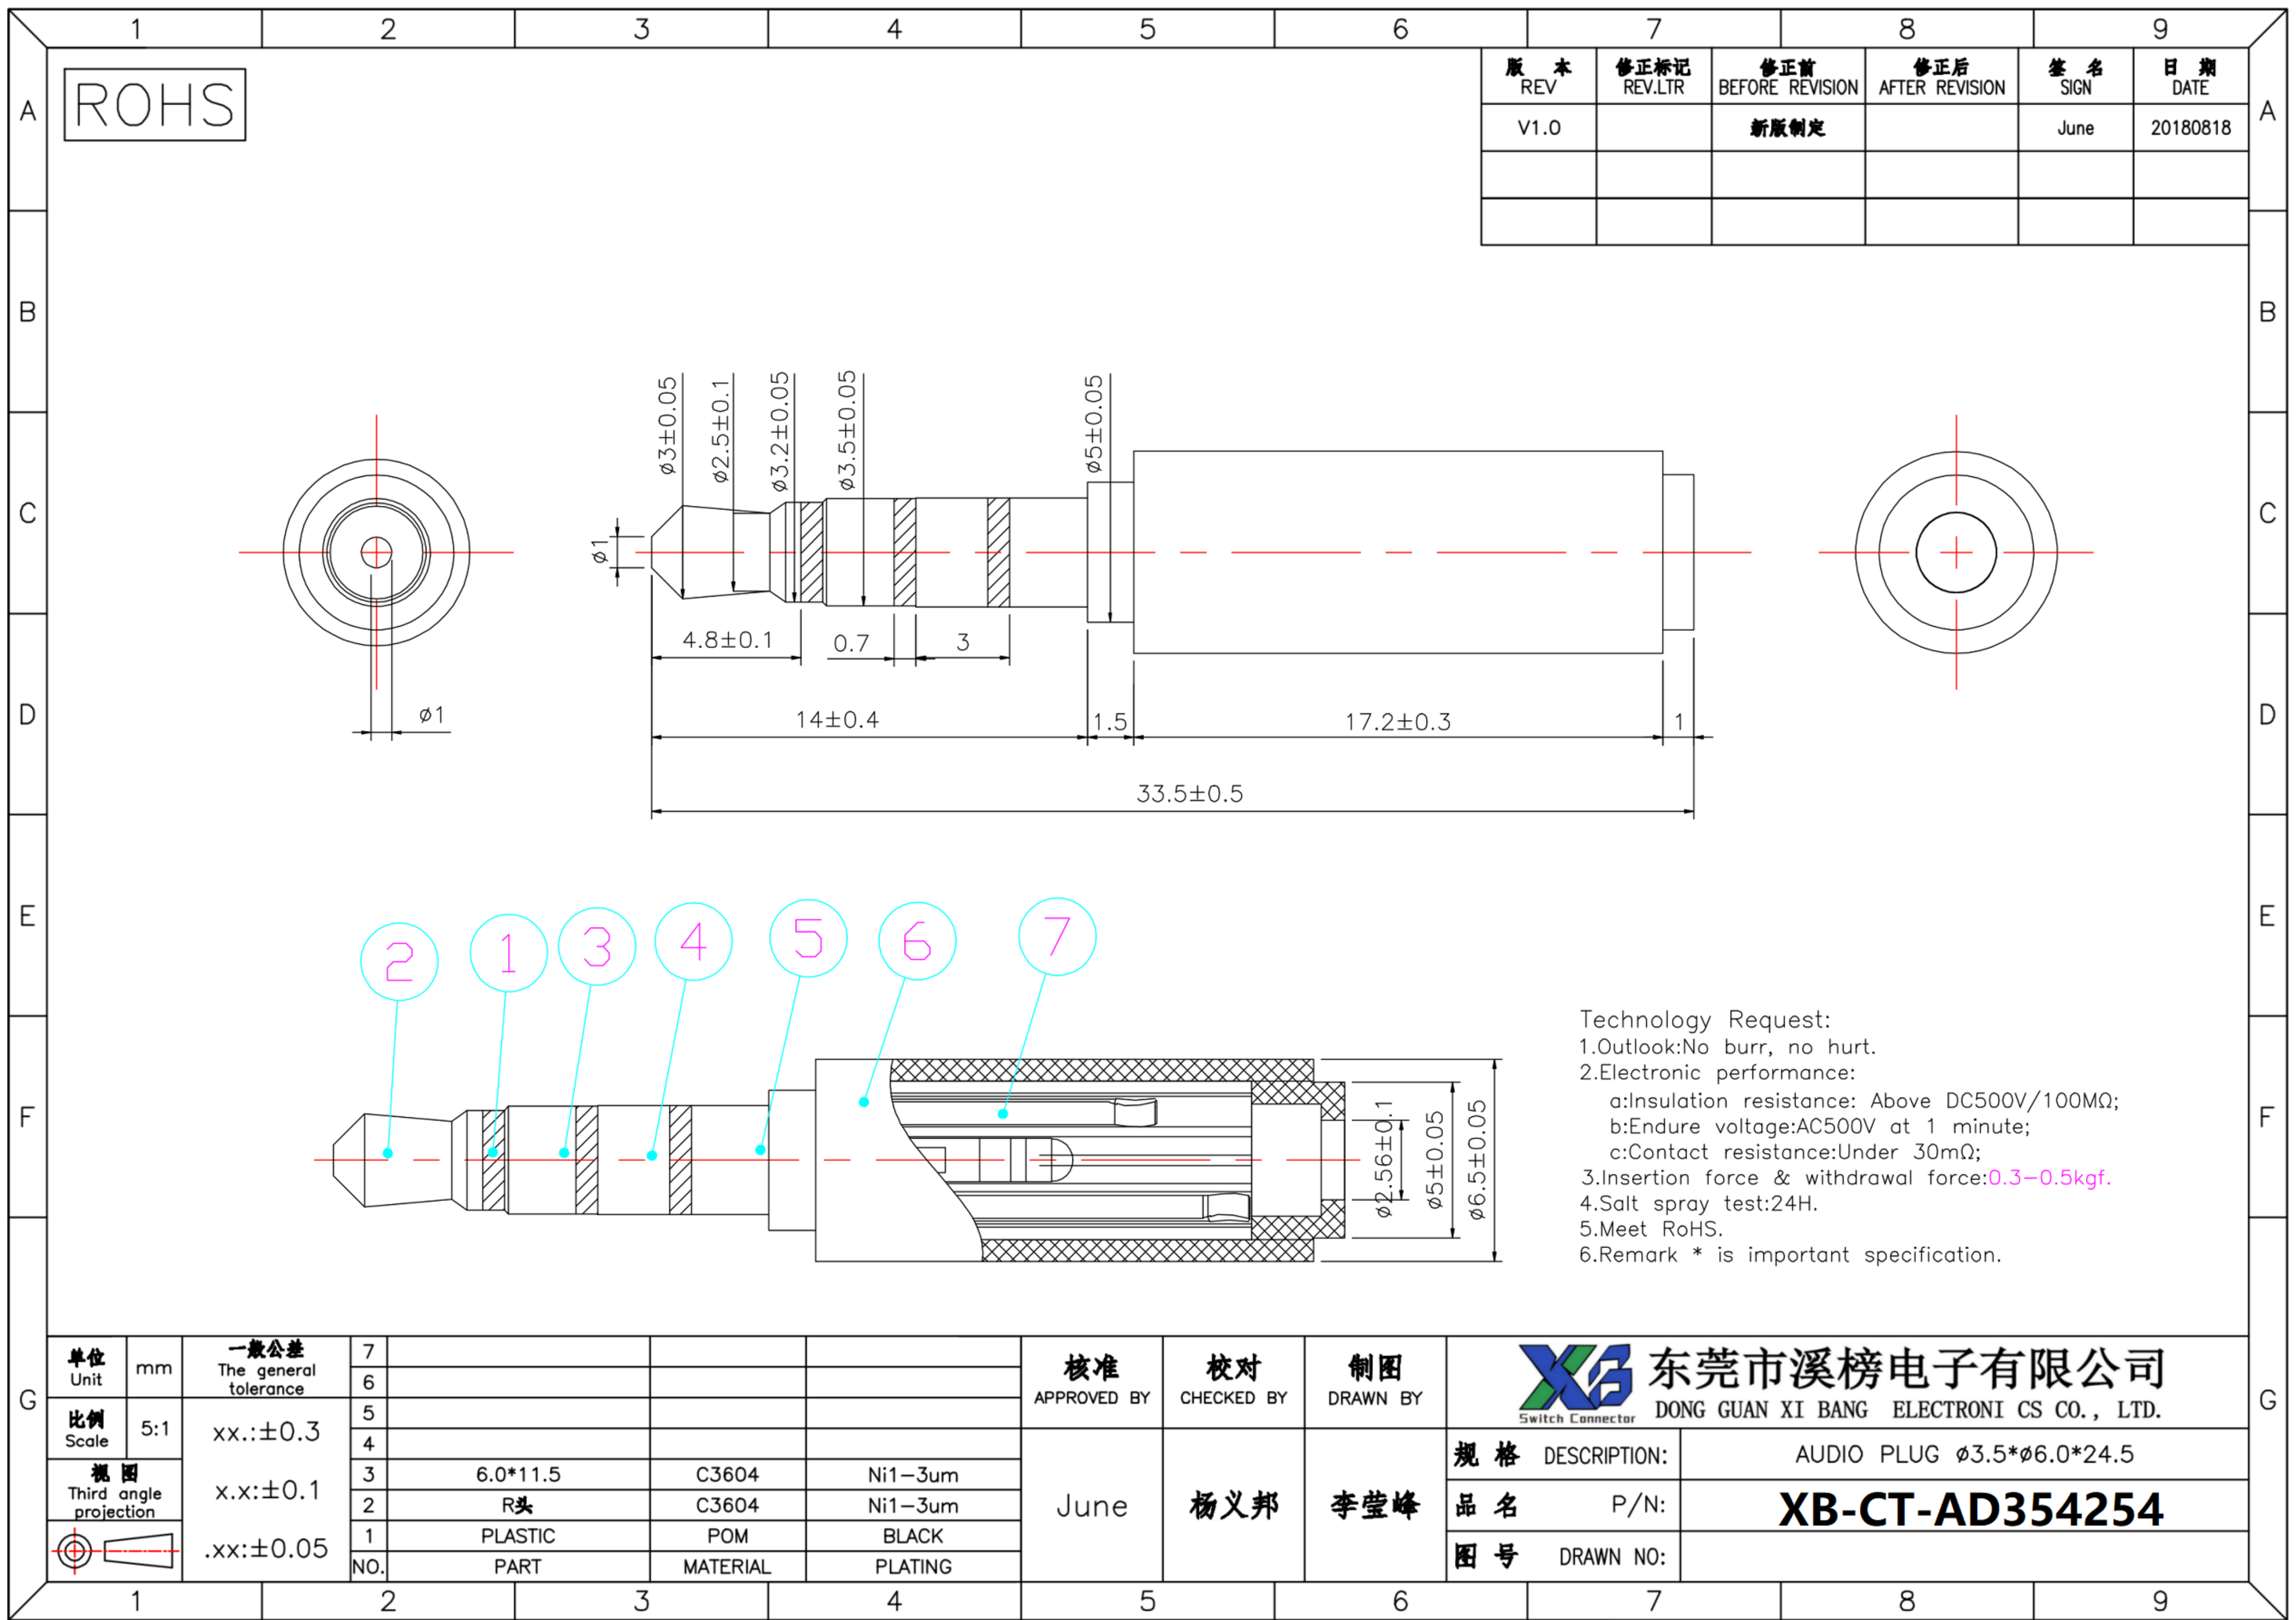

ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180818

Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance: Above DC500V/100MΩ;
b:Endure voltage:AC500V at 1 minute;
c:Contact resistance:Under 30mΩ;
3.Insertion force & withdrawal force:0.3-0.5kgf.
4.Salt spray test:24H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.					
			6												
比例 Scale	5:1	xx.:±0.3	5				June	杨义邦	李莹峰	规格 DESCRIPTION:	AUDIO PLUG ø3.5*ø6.0*24.5				
			4												
视图 Third angle projection		x.x:±0.1	3	6.0*11.5	C3604	Ni1—3um							品名 P/N:	XB-CT-AD354254	
			2	R头	C3604	Ni1—3um									
			1	PLASTIC	POM	BLACK									
		.xx:±0.05	NO.		PART	MATERIAL							PLATING	图号 DRAWN NO:	