
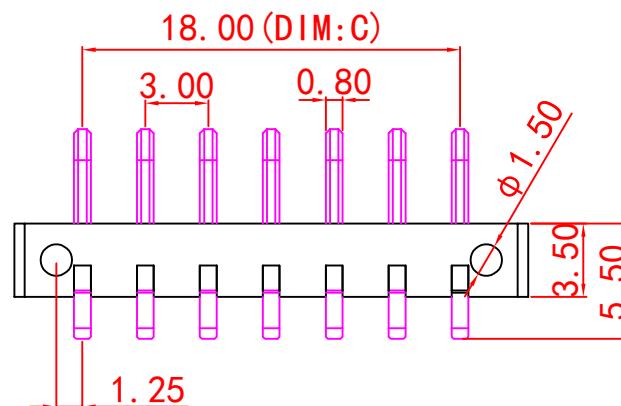
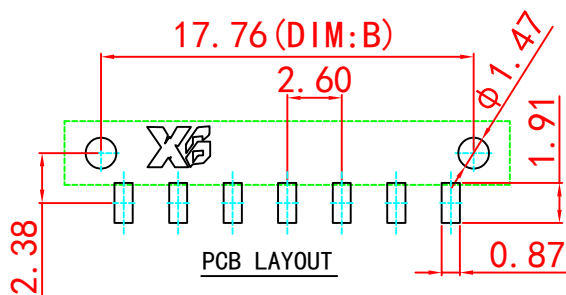
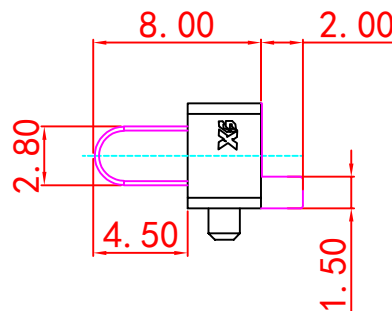


RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

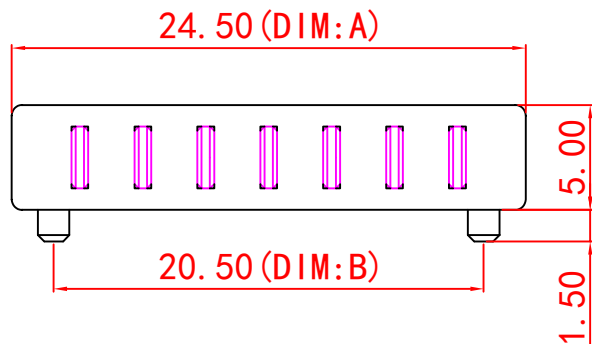

规格尺寸:型号	DIM:A	DIM:B	DIM:C
XB-D01M-N-2P-R1	9.50	5.50	3.00
XB-D01M-N-3P-R1	12.50	8.50	6.00
XB-D01M-N-4P-R1	15.50	11.50	9.00
XB-D01M-N-5P-R1	18.50	14.50	12.00
XB-D01M-N-6P-R1	21.50	17.50	15.00
XB-D01M-N-7P-R1	24.50	20.50	18.00
XB-D01M-N-8P-R1	27.50	23.50	21.00
XB-D01M-N-9P-R1	30.50	26.50	24.00
XB-D01M-N-10P-R1	33.50	29.50	27.00
XB-D01M-N-11P-R1	36.50	32.50	30.00
XB-D01M-N-12P-R1	39.50	35.50	33.00

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 12V 15A / Pin
 - 1-2. CONTACT RESISTANCE: 30mΩ
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 500MΩ ,
MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.
- TEMPERATURE RISE : 30° C MAX

2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	HIGH CONDUCTIVITY COPPER	7	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	CONNECTOR	DRAWING	ZENQ. CHEN	DWG. No.	3.0公座
PART NO.	XB-D01M-N-2P/12P系列	CHECK	JUN. YANG	REV.	N1
UNIT : mm	TOLERANCE OTHERWISE	ANGLE 0° ±3°	APPROVAL SCALE	DATE PAGE	5/8/2023 1 OF 1