


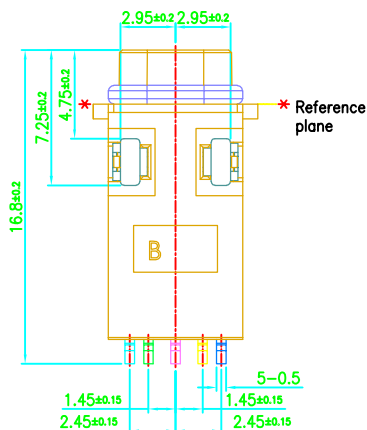
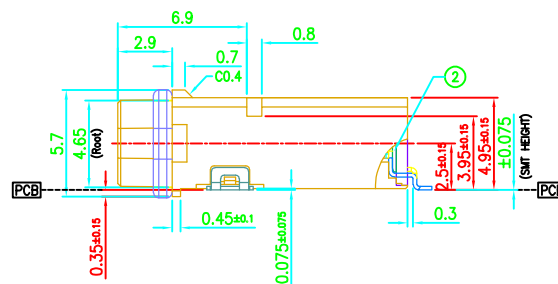

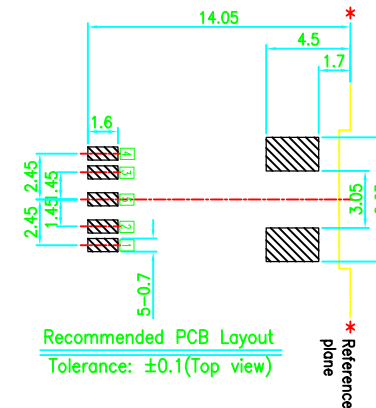
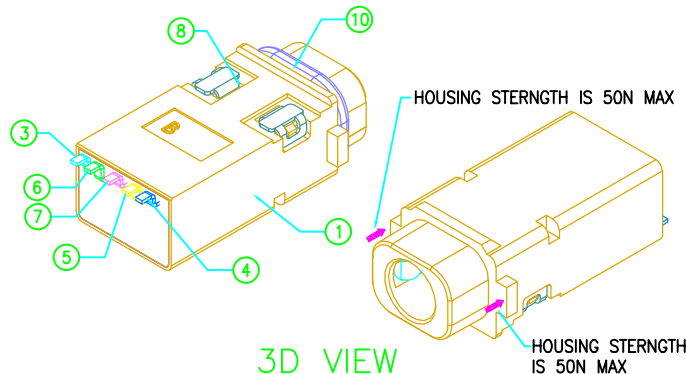


RoHS
Compliant

ZONE	E C N . I N O	DESCRIPTION	DRAWING	DATE
A		INITIAL	PANG. GAO	2023.6.9

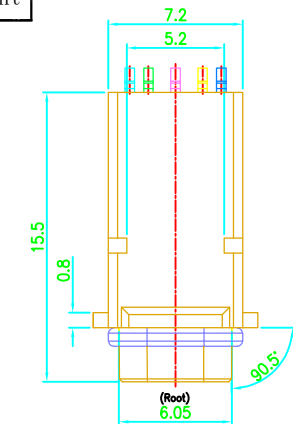

□ : TERMINAL NO. ○ : ITEM NO.

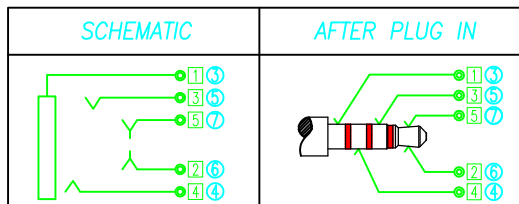

- SPECIFICATIONS:
- 1.RATED VOLTAGE:DC 12V
RATED CURRENT: 1A
 - 2.INSULATION RESISTANCE:A VOLTAGE OF 500V D.C. SHALL BE APPLIED TO THE TERMINALS, AFTER WHICH MEASUREMENT SHALL BE MADE. A GAUGE FOR THE MEASUREMENT SHALL BE USED THE INSULATEDGAUGE.
 - 3.CONTACT RESISTANCE:30mΩ OR LESS
 - 4.VOLTAGE PROOF:500V AC FOR ONE MINUTE
 - 5.DURABILITY:5,000 INSERTION/REMOVAL CYCLES(MINIMUM)
 - 6.INSERTION FORCE:0.6KGF~2.0KGF
 - 7.WITHDRAWAL FORCE:0.6KGF~2.0KGF
 - 8.WATER PROOFNESS:This product is based on IPX5/7 of the JIS Standard.
 - 9.USING PLUG: Ø3.5MM、4-POLE STEREO EARPHONE(LCH/RCH/GND/MIC) PROVIDED THAT THEY CONFORM TO JIS C6560
 - 10.HOUSING STERNGTH IS 50N MAX

10	OVAL RING	SILICONE	-----	1
9	BOND	EPOXY	-----	1
8	TERMINAL	C2680 t=0.2	Gold flash plating Nickel 40u"min underplate	2
7	TIP SPRING-2 [5]	Ti-Cu t=0.2	Gold flash plating Nickel 40u"min underplate	1
6	TIP SPRING-1 [2]	Ti-Cu t=0.2	Gold flash plating Nickel 40u"min underplate	1
5	RING SPRING-2 [3]	Ti-Cu t=0.2	Gold flash plating Nickel 40u"min underplate	1
4	RING SPRING-1 [2]	Ti-Cu t=0.2	Gold flash plating Nickel 40u"min underplate	1
3	EARTH SPRING [1]	Ti-Cu t=0.2	Gold flash plating Nickel 40u"min underplate	1
2	COVER	PA9T 94V-0	COLOR BLACK	1
1	HOUSING	PA9T 94V-0	COLOR BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING:	PANG. GAO	DATE:	2023.6.9	SCALE	1:1
CHECK:	JIE. HAI. LAI	DATE:	2023.6.9	MATERIAL	*
APPROVAL:	FEI. LONG. HE	DATE:	2023.6.9	DWG. NO.	
DRAWING NO.	XB-PJ-1835-IPX7			SHEET	1/2

PART NAME	WATERPROOF Ø3.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT:	mm
PART NO.	XB-PJ-1835-IPX7	OTHERWISE SPECIFIED:	0.00±0.20	0.0°±1°		
			0.000±0.10	0.00°±0.5°		