
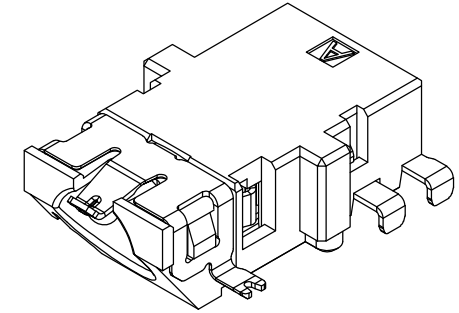
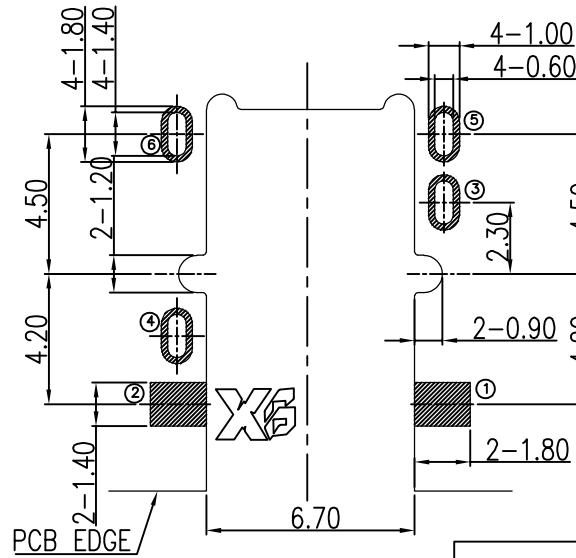
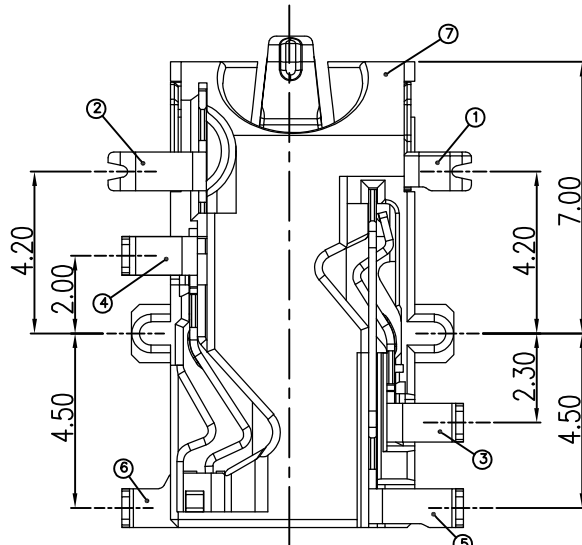
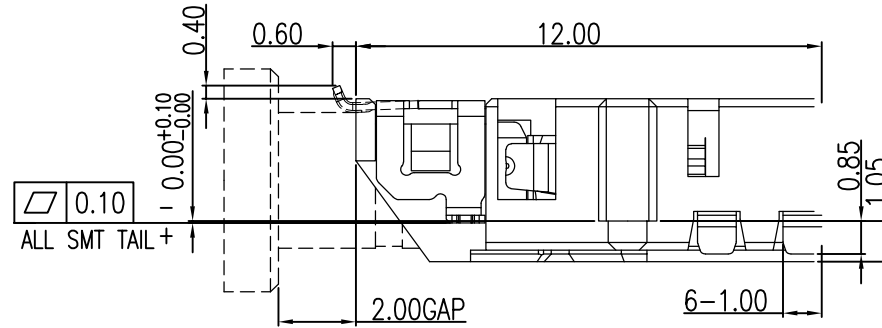





REV.		ECN NO.		DESCRIPTION		DESIGN	DATE
A				INITIAL		Lucky	2018.10.26

NOTES

1. CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~30N.
7. CONNECTOR UNMATING FORCES: 3~30N.
8. OPERATING TEMPERATURE: -25°C TO +85°C.

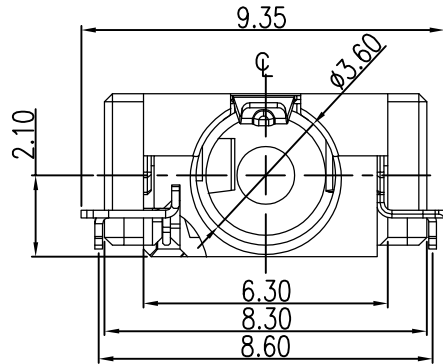

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE:±0.05)

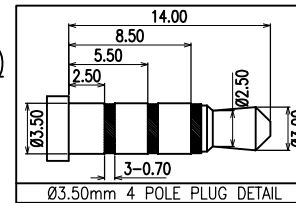

ITEM	NAME	Q'TY	DESCRIPTION
⑦	HOUSING	1	HIGH TEMPERATURE PLASTIC; BLACK
⑥	TERMINAL 6#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA
⑤	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA
④	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
③	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
②	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA
①	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA


UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.35	X.	±2°
X.X	±0.25	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DWG NO.	XB-PJ-35A083-F06J1BR-B	PART NAME:	Ø3.5 PHONE JACK CONNECTOR
DESIGN:	PAO.GAO 2023.6.6	PART NO.	XB-PJ-35A083-F06J1BR-B
CHECK:	JIE.HIA.LAI 2023.6.6	REV.	A
APPROVED	FEI.LONG.HE 2023.6.6	UNIT:	mm
		SHEET:	1/1




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	PAO.GAO	2023.6.6




1 载带=1000PCS

1 外箱=1000PCS×10 载带=10000PCS


首端空位12PCS, 末端空位20PCS
中间实装数量1000PCS



载带引出方向

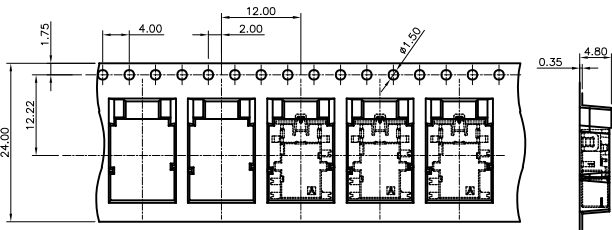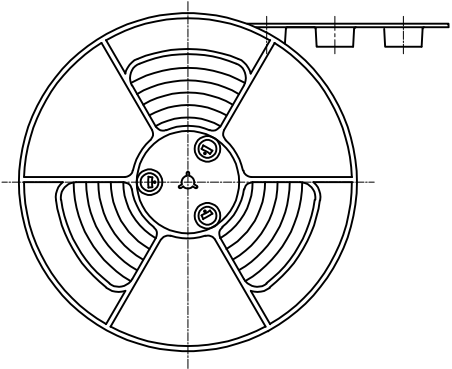

载盘



标签一

三角板

PE袋

标签二

纸箱

包材名称	材料	规格
载带	PET (白色透明)	12500×24.0×4.80
载盘	P.S (蓝色)	Ø330×28.4
自粘带	PET (白色透明)	W21.30×T0.06
纸箱	K=K	L350×W350×H320
PE袋	PE (白色透明)	L770×W750×T0.35

备注：
1.每载盘内必须放干燥剂;
2.每箱增加1个PE防水袋包装;
3.参考《高温材料管理规定》进行作业;
4.条码/二维码标签和交货标签按客户要求制作。

UNLESS OTHERWISE SPECIFIED TOLERANCES				XIB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
DECIMALS:		ANGLES:		DWG NO.	XB-PJ-35A083-F06J1BR-B			PART NAME: PHONE JACK PACKING	
DIM	TOL	DIM	TOL	DESIGN:	PAO.GAO 2023.6.6			PART NO. XB-PJ-35A083-F06J1BR-B	
X.	±0.20	X.	±1°	CHECK:	JIE.HIA.LAI 2023.6.6				
X.X	±0.10	X.X	±0.5°	APPROVED	FEI.LONG.HE 2023.6.6			REV.	UNIT:
XX	±0.05	X.XX			A	mm			
XXX	±0.02	X.XXX							
							SHEET:		
							1/1		