
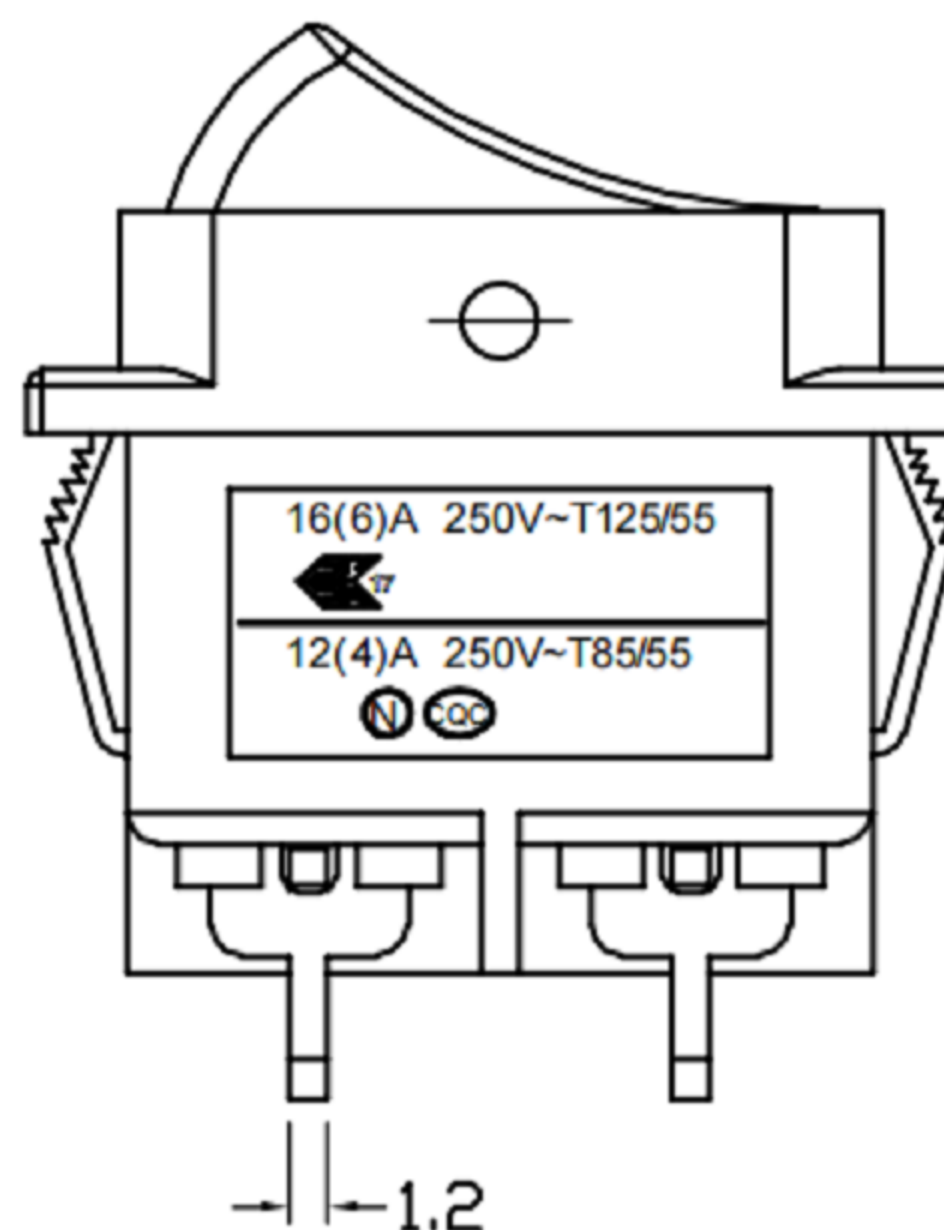
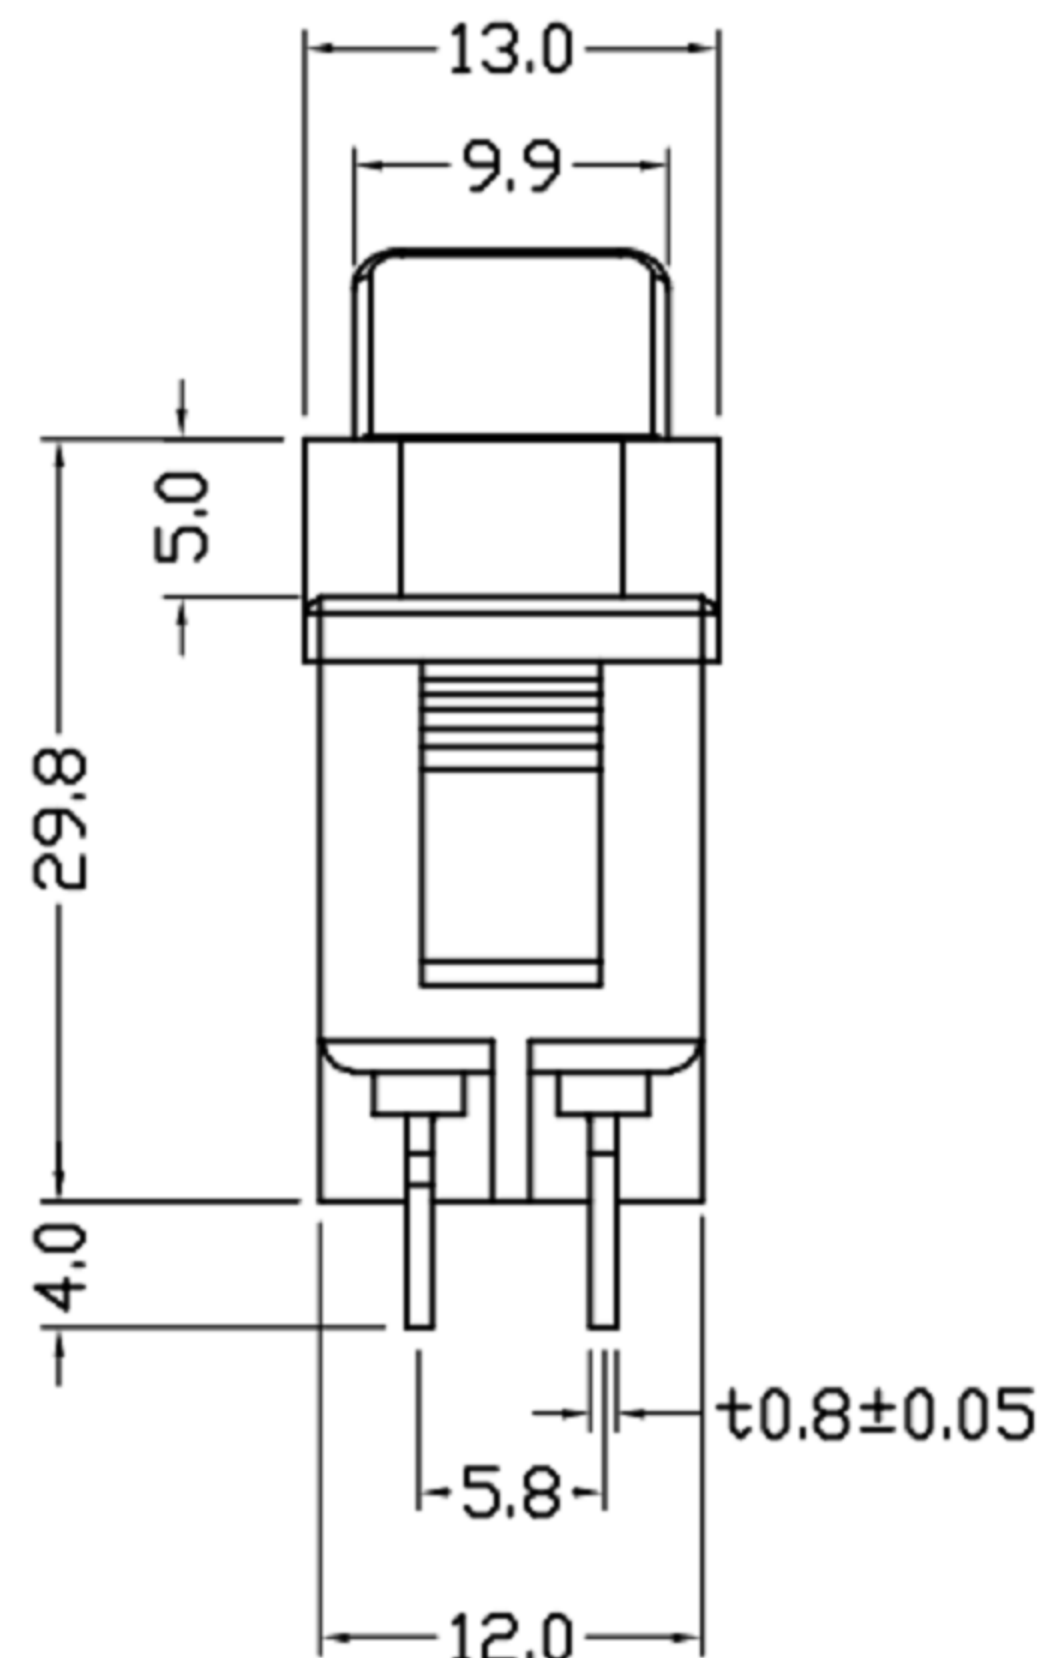




CAD FILE:

ROHS

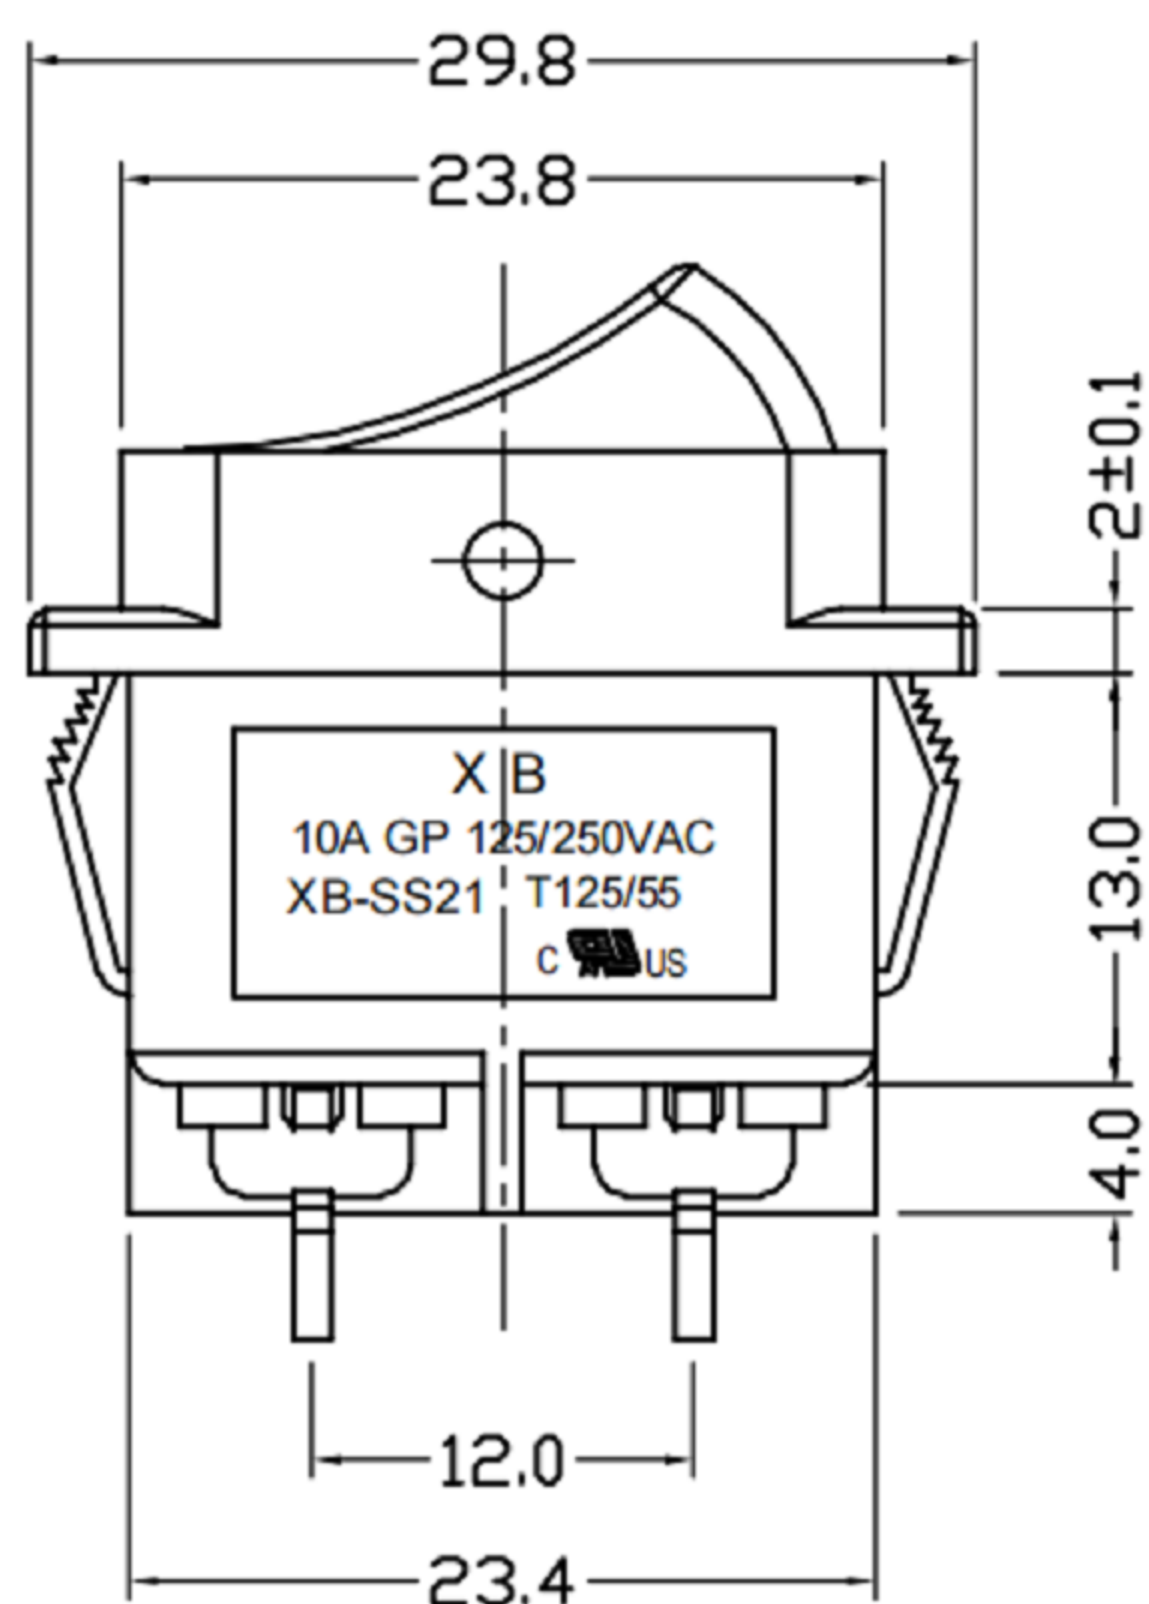


PANEL THICKNESS	X	Y
1.2~2.0mm	26.0 ⁺⁰ _{-0.1} mm	12.1 ^{+0.1} ₋₀ mm
2.0~3.2mm	26.5 ⁺⁰ _{-0.1} mm	12.1 ^{+0.1} ₋₀ mm

PANEL HOLE SIZE

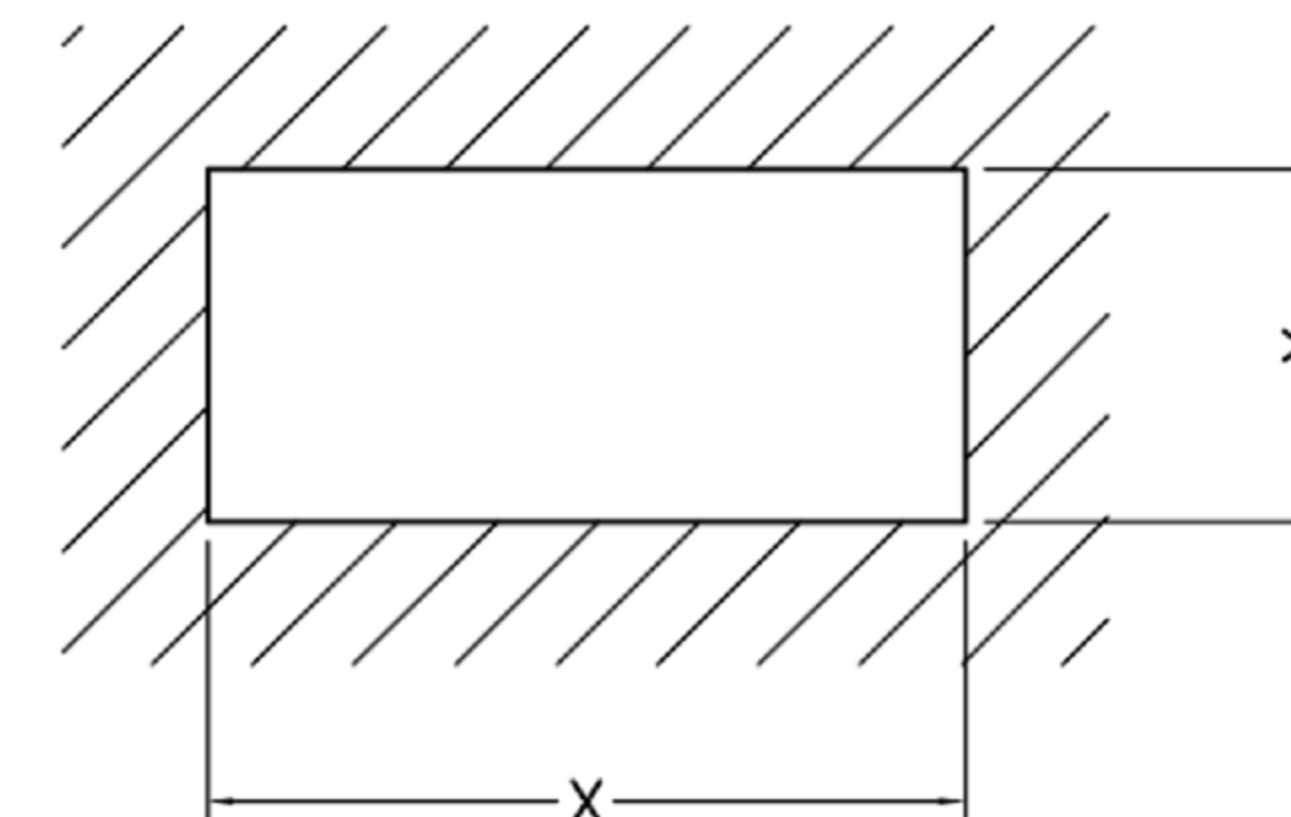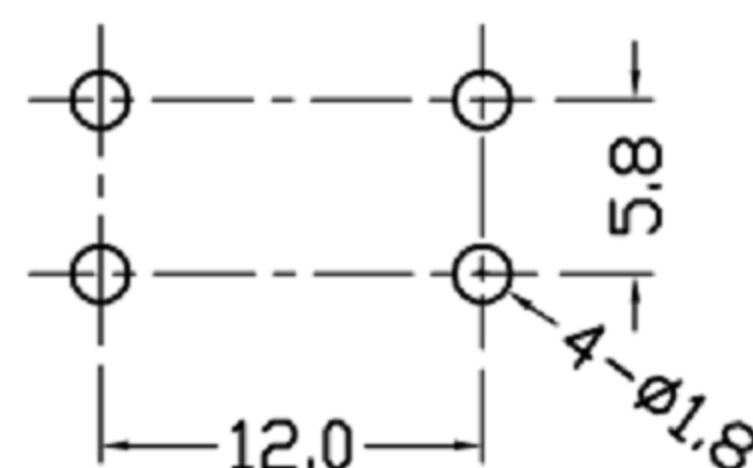PCB MOUNTING HOLE
ARRANGEMENT

SWITCH CIRCUIT

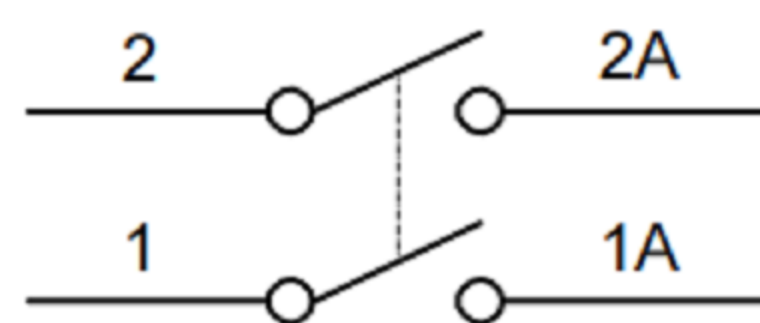

1. 电路 CIRCUIT: ON/OFF
2. 快插端子 QUICK CONNECTOR TYPE
3. 额定值 RATING: 10A GP 125/250VAC T125/55(C-UL)
16(6)A 250V~T125/55(ENEC15)
12(4)A 250V~T85/55(NEMKO;CQC;KC)
4. 所有部件均使用环保材料
ALL MATERIALS USING MEET THE RoHS DIRECTIVE

品 名	上盖/基座(颜色)
XB-SS21-WWNS5-R	白色/白色
XB-SS21-BBNS5-R	黑色/黑色

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Rotary Switch			UNIT : mm	DRWG NO.: XB-SS21-BBNS5-R
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-SS21-BBNS5-R			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					