
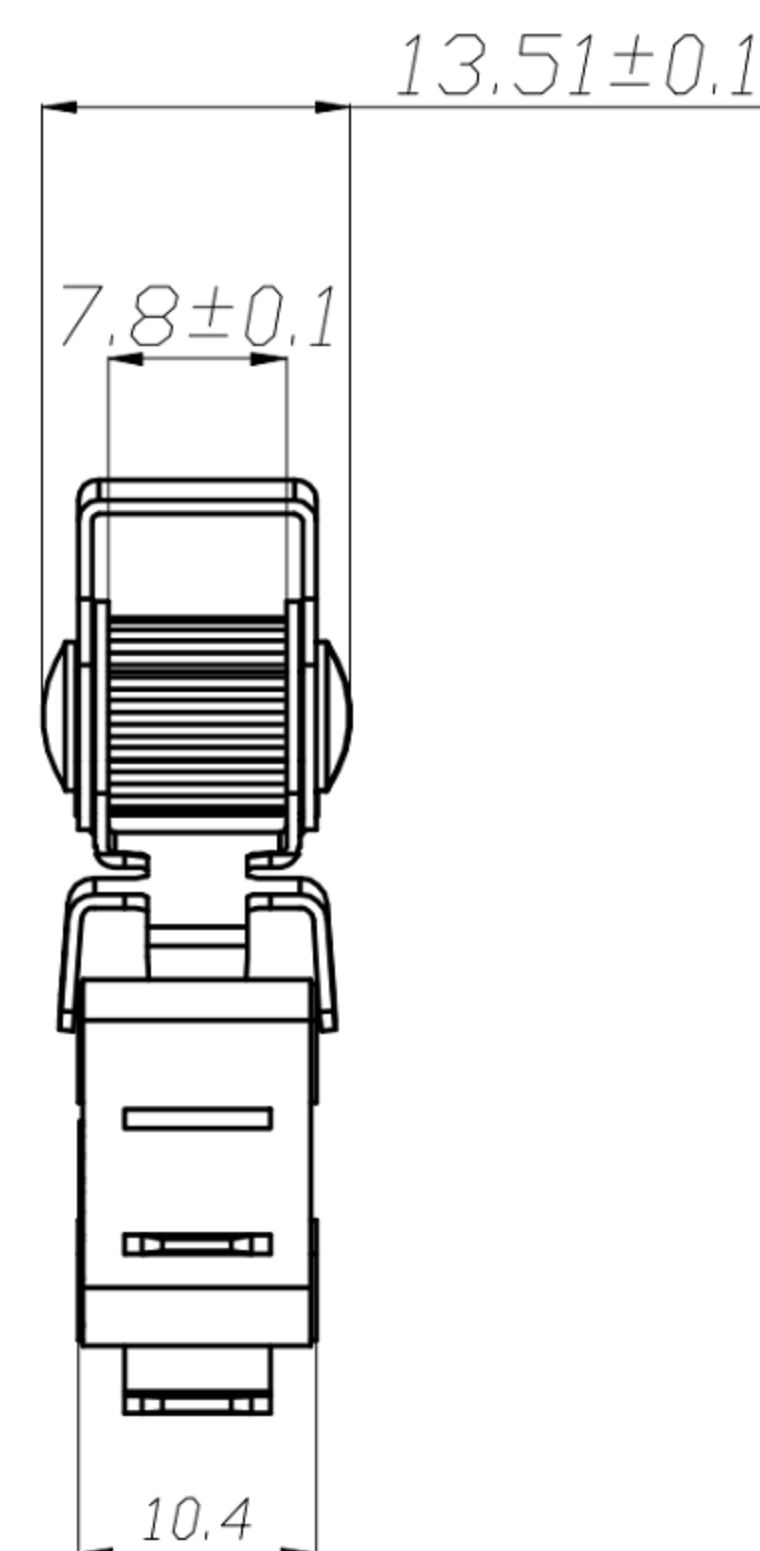


- 1.自动复位开关型号 BIASED SWITCH MODEL NO.:
- 2.快插端子 QUICK CONNECTOR TYPE
单刀双掷 SINGLE POLE DOUBLE THROW
- 3.额定值 RATING: 16A 250VAC μ T125 (KC)
16A 125/250VAC μ T125 (UL;ENEC17;NEMKO;CQC)
10A 250VAC μ T85 (ENEC17;NEMKO;CQC)
6A 125VAC 3A 250VAC μ T85 (ENEC17;NEMKO ;CQC)
- 4.接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 5.绝缘电阻 INSULATION RESISTANCE: $\geq$ 100M Ω (DC500V/1MIN)
- 6.介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
- 7.机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 9.操作力 OPERATION FORCE:150~250gf
- 10.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

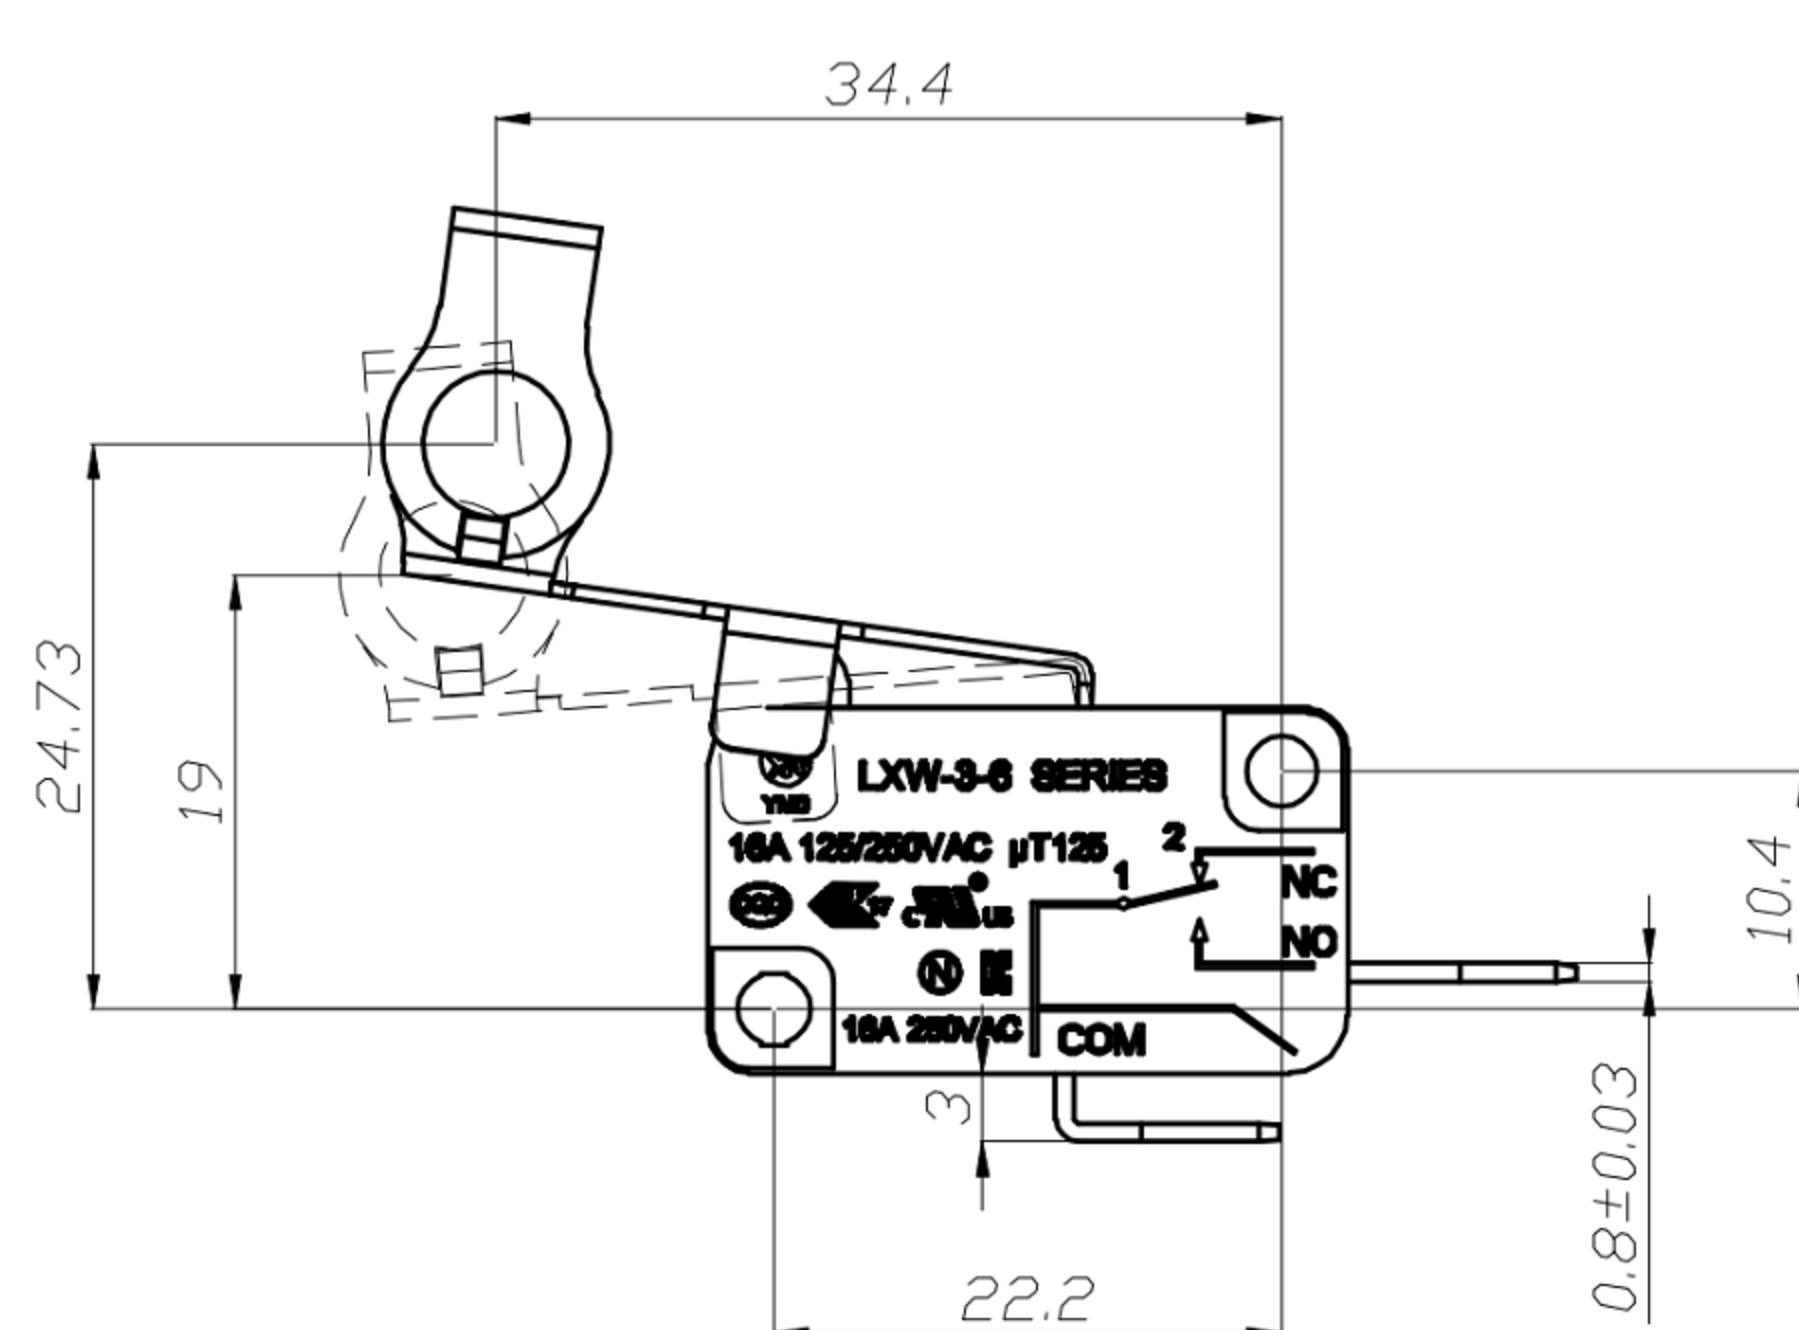

8					TOLERANCE						
7					UNLESS SPECIFIED						
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.:XB-3-6A-J5-22Q2-R1		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED							
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
1	KNOB	PPA	1	BLACK					CHK'D	DONG. PANG	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.			APPD.	ZENQ. CHEN	2012-9-25	