




REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A0		新版发行	2020. 11. 21	高鹏

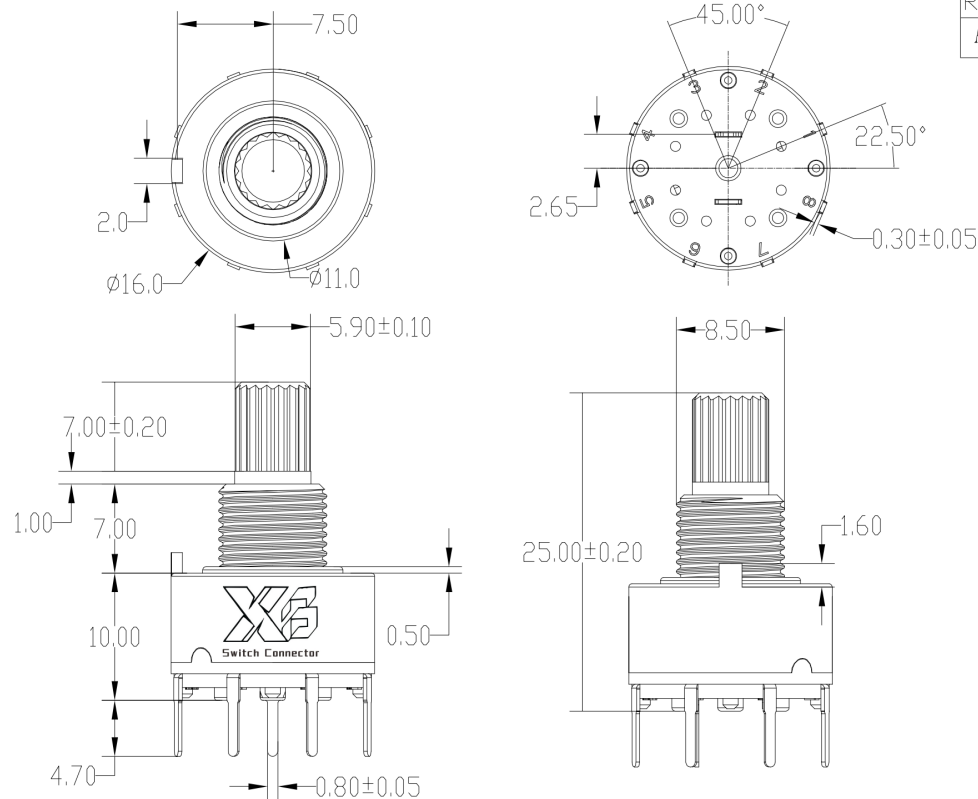


- 1、EXECTRICAL RATING:0.3A 60VDC .
- 2、ROTATION ANGLE:45° .
- 3、CONTACT RESISTANCE:≤50mΩ (INITIAL VALUE).
- 4、INSUIATION RESISTANCE:≥100MΩ (EXPERIMENTAL VOLATAGE 500VDC).
- 5、RATED IMPULSE WITHSTAND VOITAGE 500VAC, 0.5mA.
- 6、EIECTRICAL SERVICE LIFE:10000(CYCLES).
- 7、TORSION FORCE:0.3±0.1KGF.
- 8、CIRCUIT DIAGEAM:L1 L2 L3 L4 L5

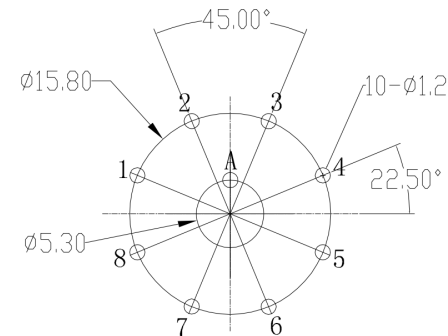

PCB安装



电路功能

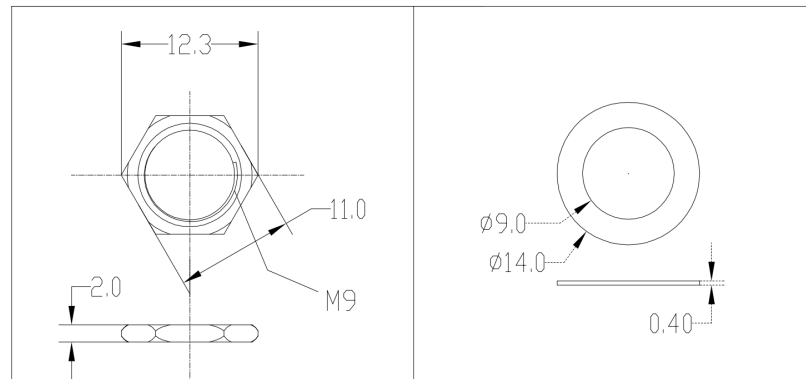

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司			
DECIMALS		ANGLES		旋转开关			
X	±0.50	X	±2°	TITLE	XB-RS-1601		
X.X	±0.30	X.X		DATE	20.11.21	PART NO.	
X.XX	±0.15	X.XX		DWN	高鹏	SCALE:1/1	UNIT: mm
X.XXX	±0.08	X.XX	±1°	CHKD	赖海杰	SIZE: A4	SHEET:1 OF 1
				APVD	贺龙飞	DWG NO.:	VIEW:
						T NO.:	