




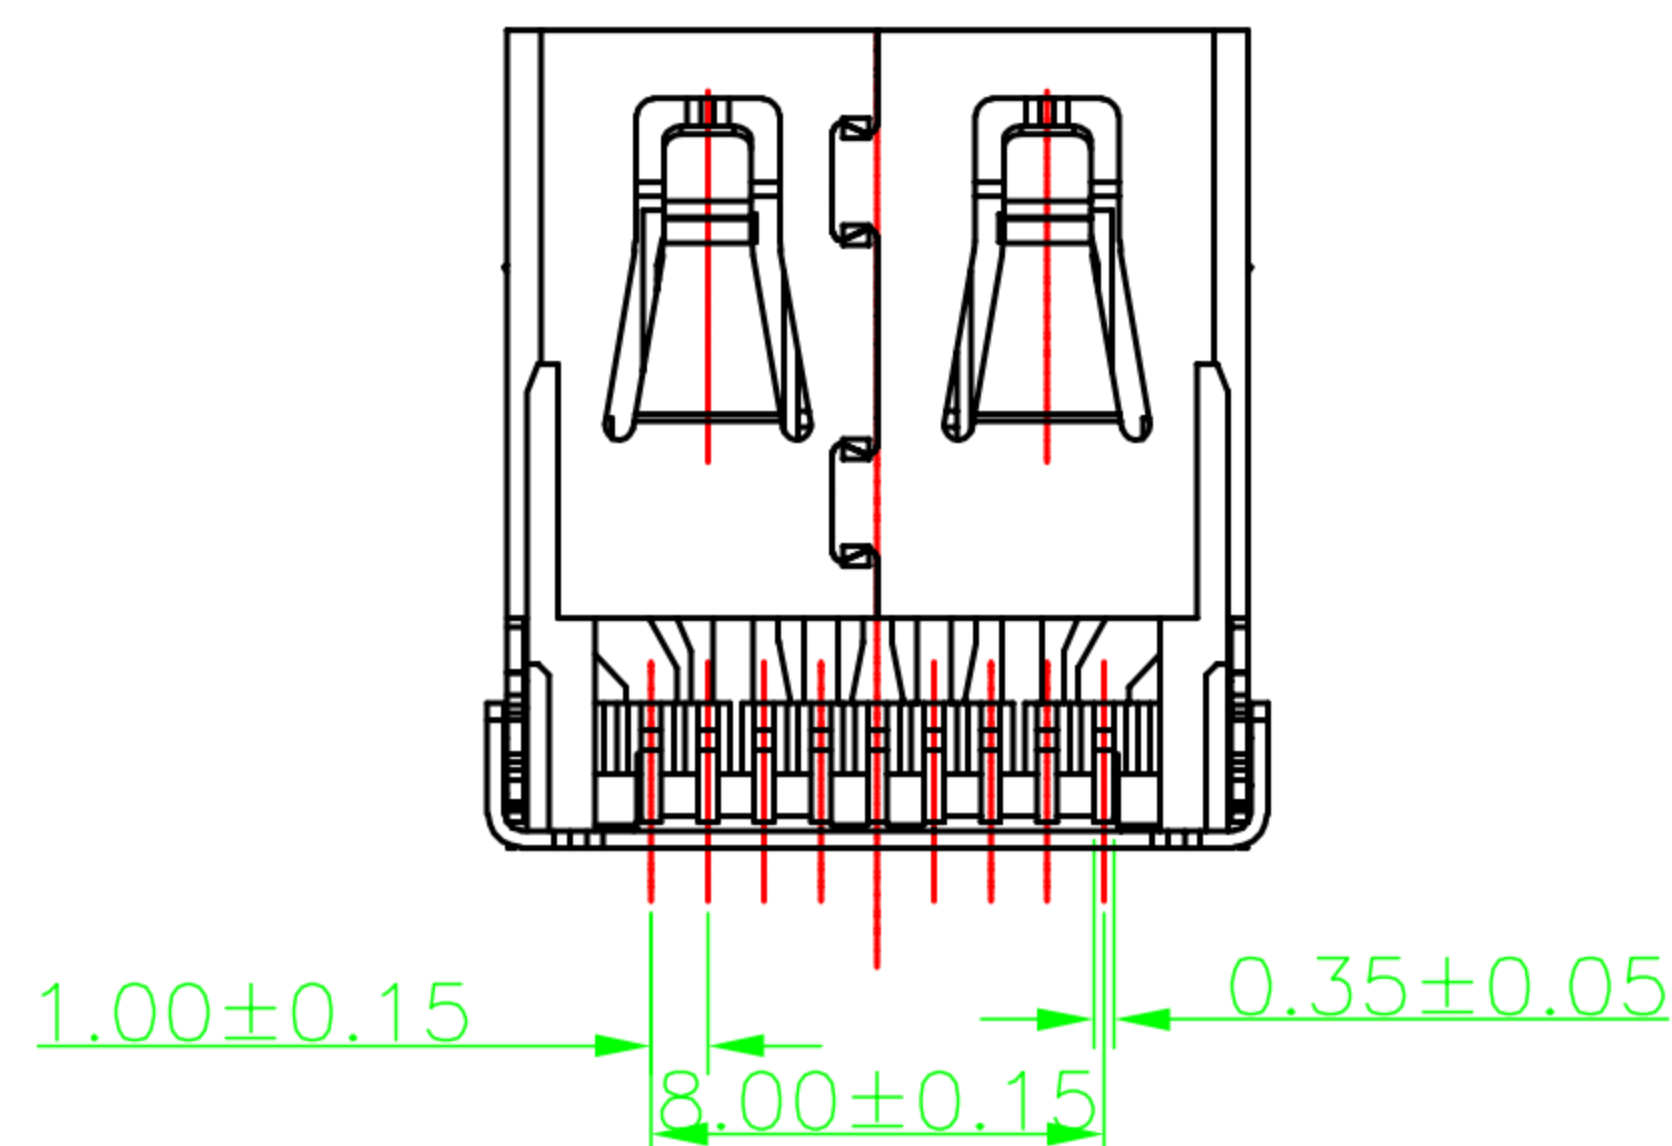

3	SHELL	1	BRASS
2	TERMINAL	9	BRONZE
1	Molding-ASSY	1	LCP
NO.	TITLE	Q'TY	MATERIAL

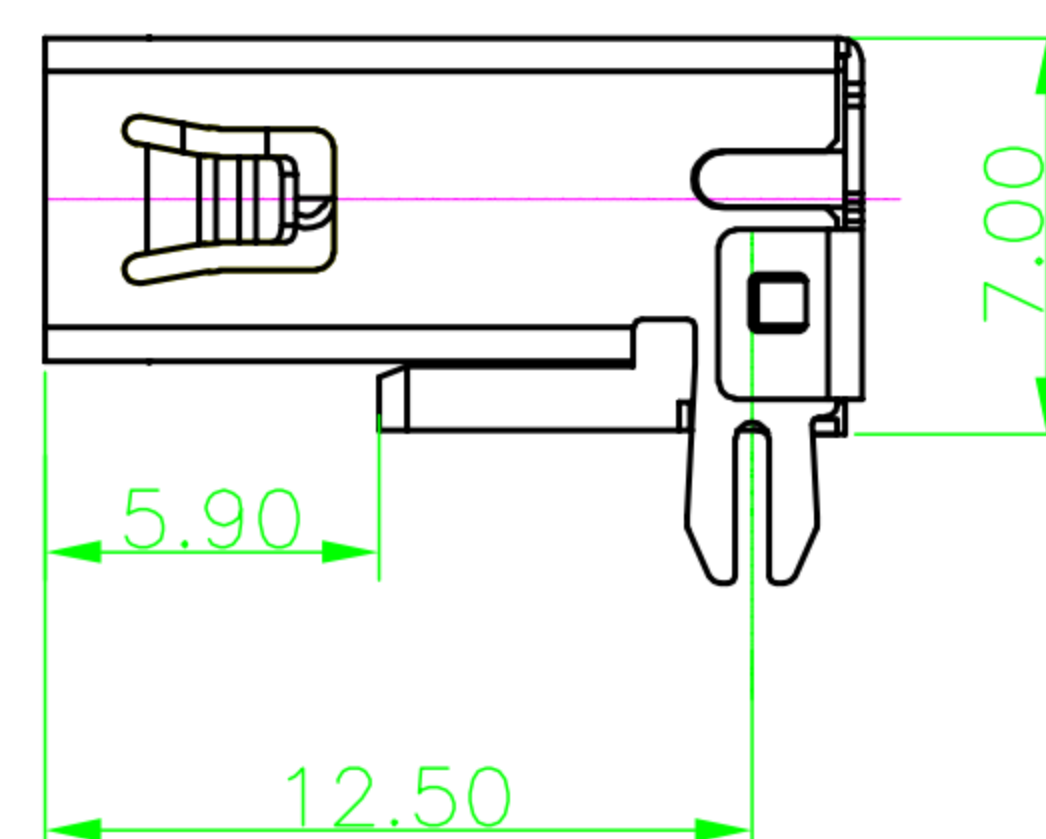

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

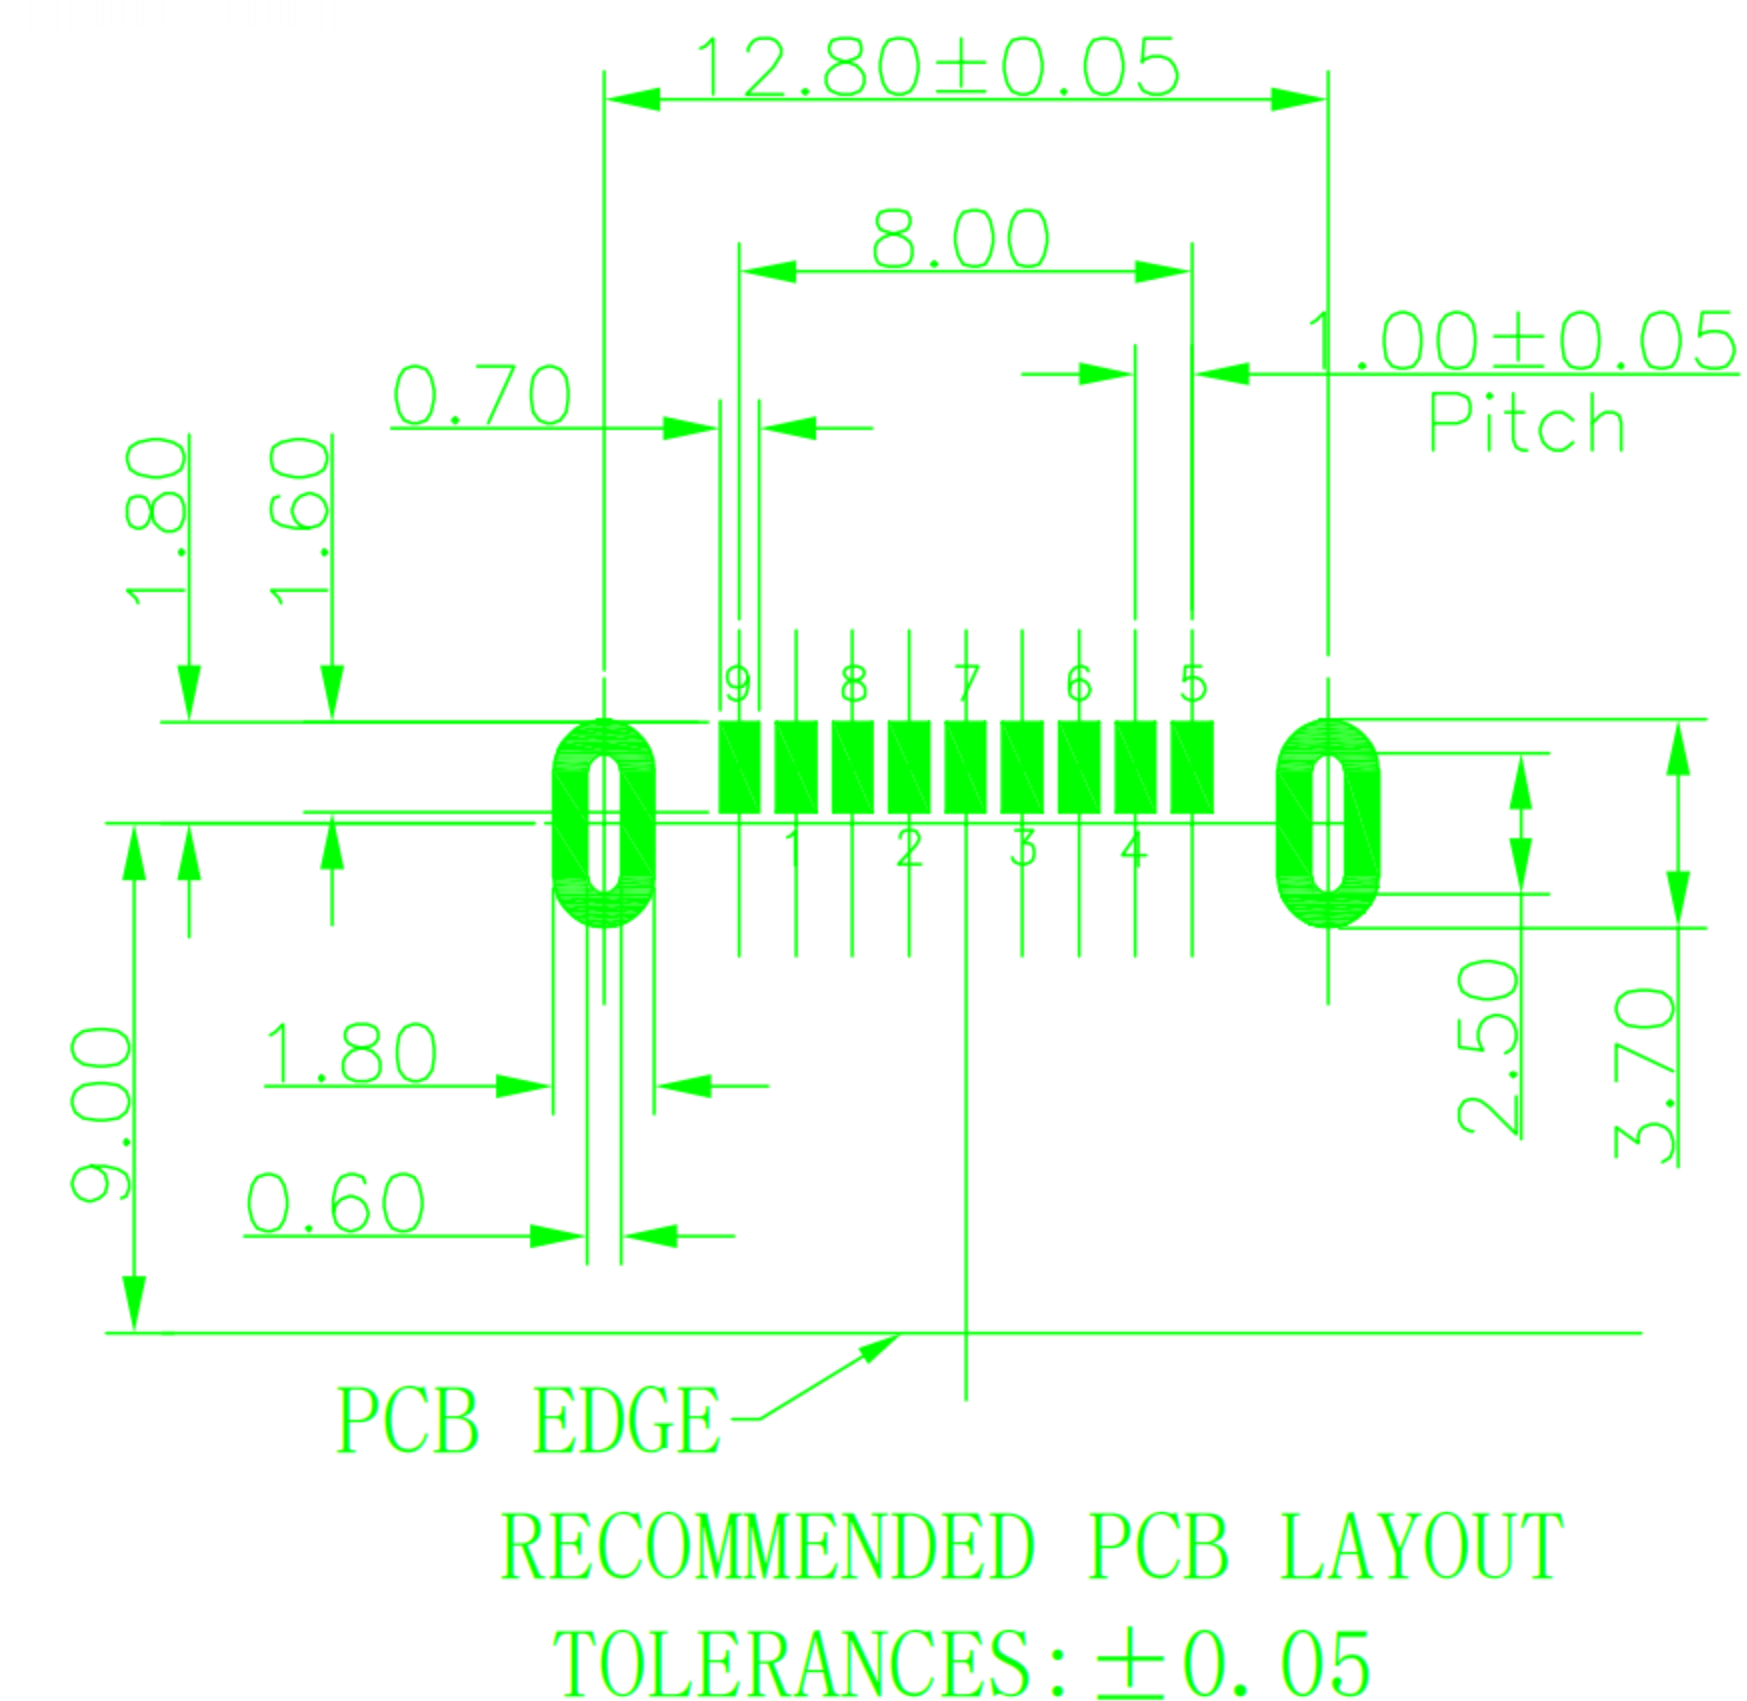

Operating Temperature: -40°C to +85°C

							DSND		SCALE: N/A	MODEL TYPE: USB 3.0							
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: XB-U231-091SMT							
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:							
				4<L ≤ 16	±0.3		APPD		SIZE: A4								
				16<L ≤ 63	±0.4												
				L > 63	±0.5												
					DATE	REVISED	APPROVED										
REVISIONS						UNSPECIFIED TOLERANCES						DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com																1/1	A0