

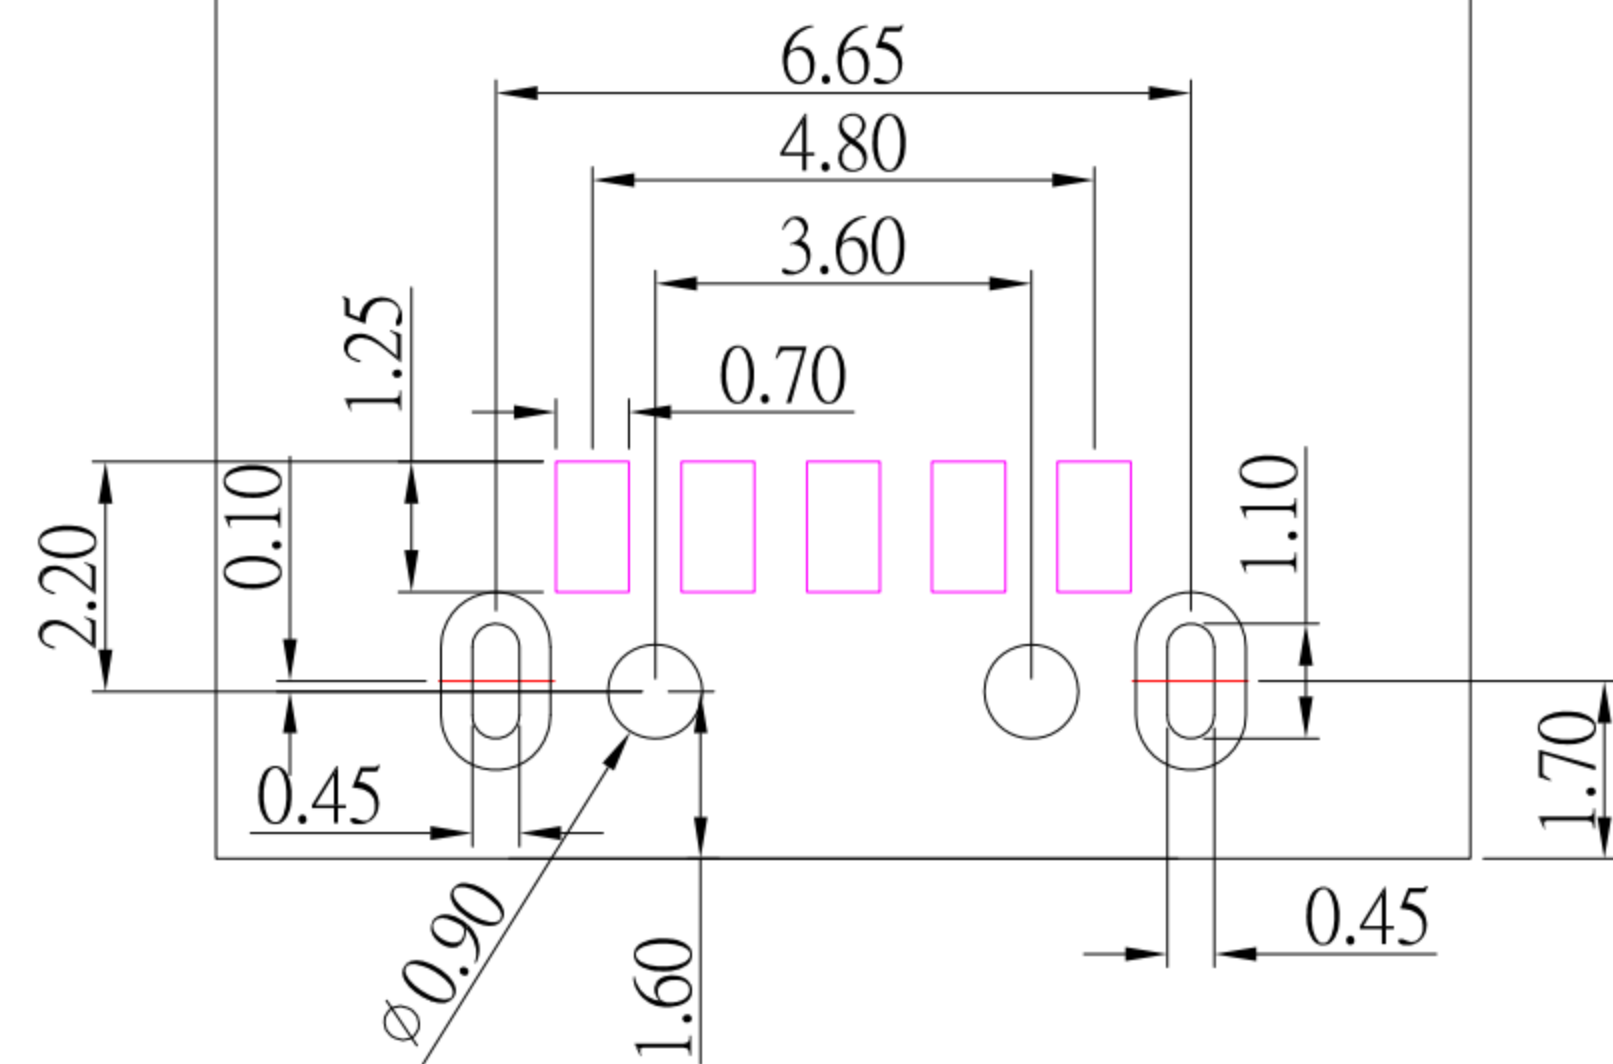
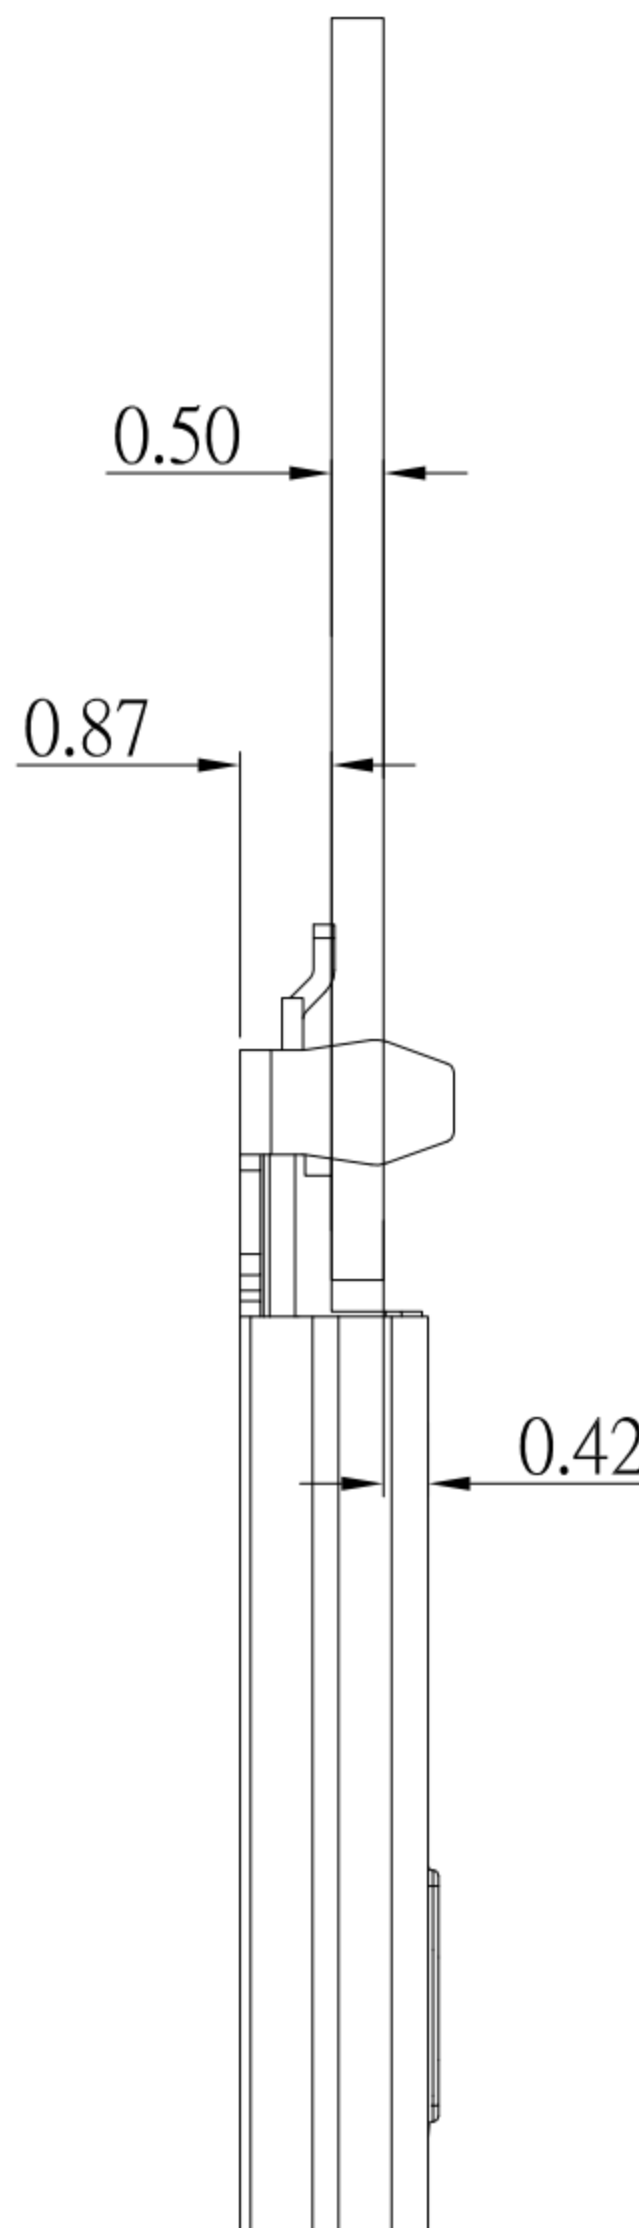
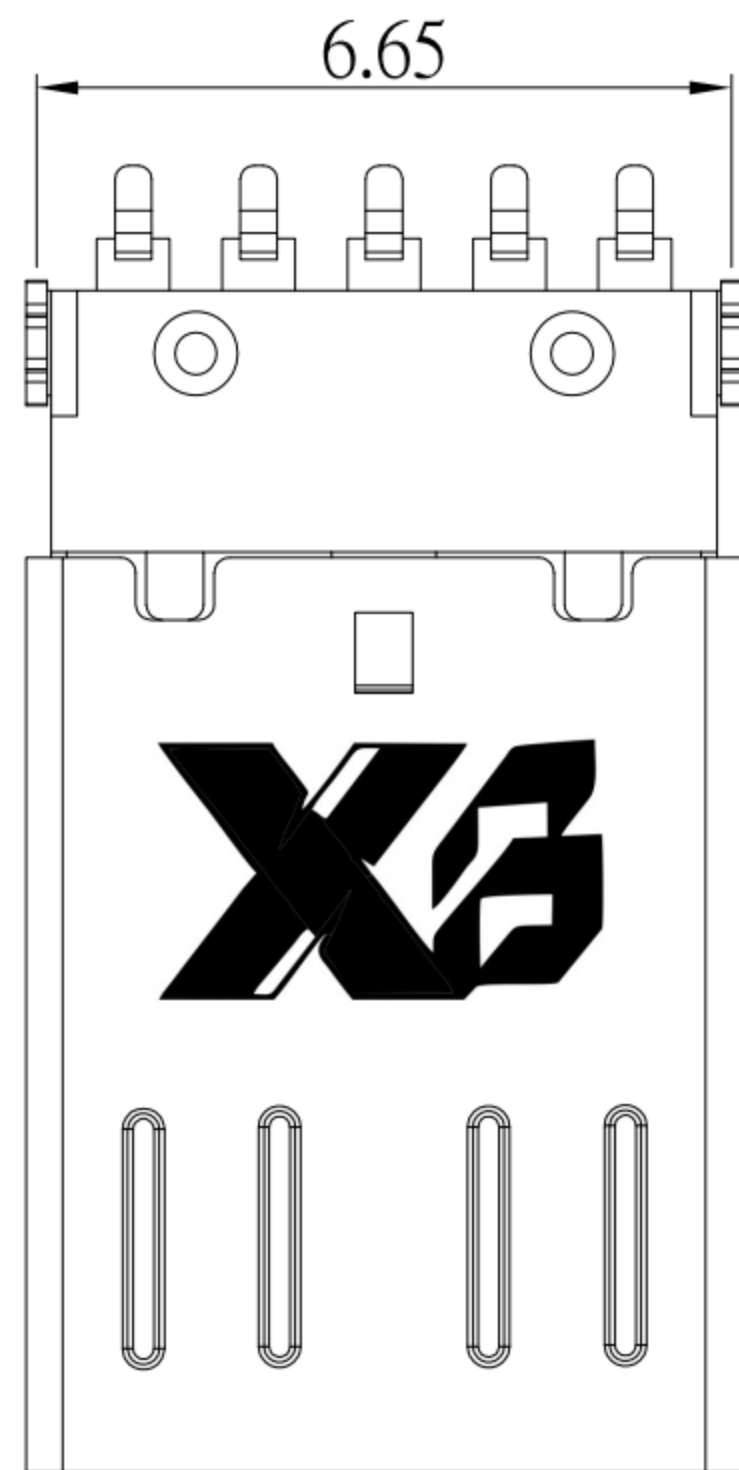
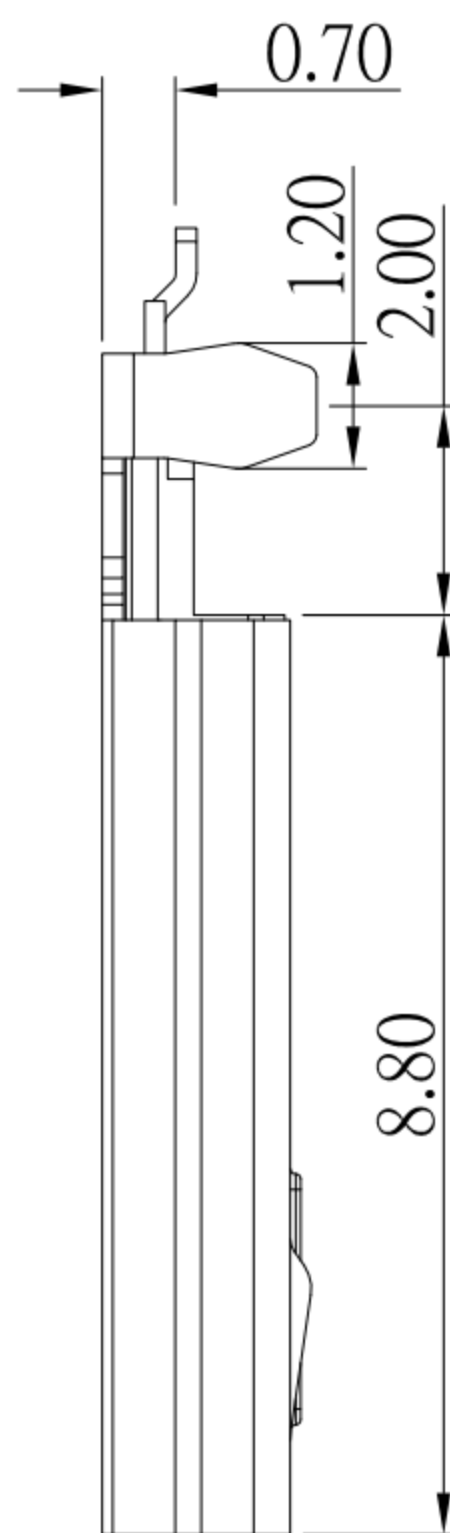
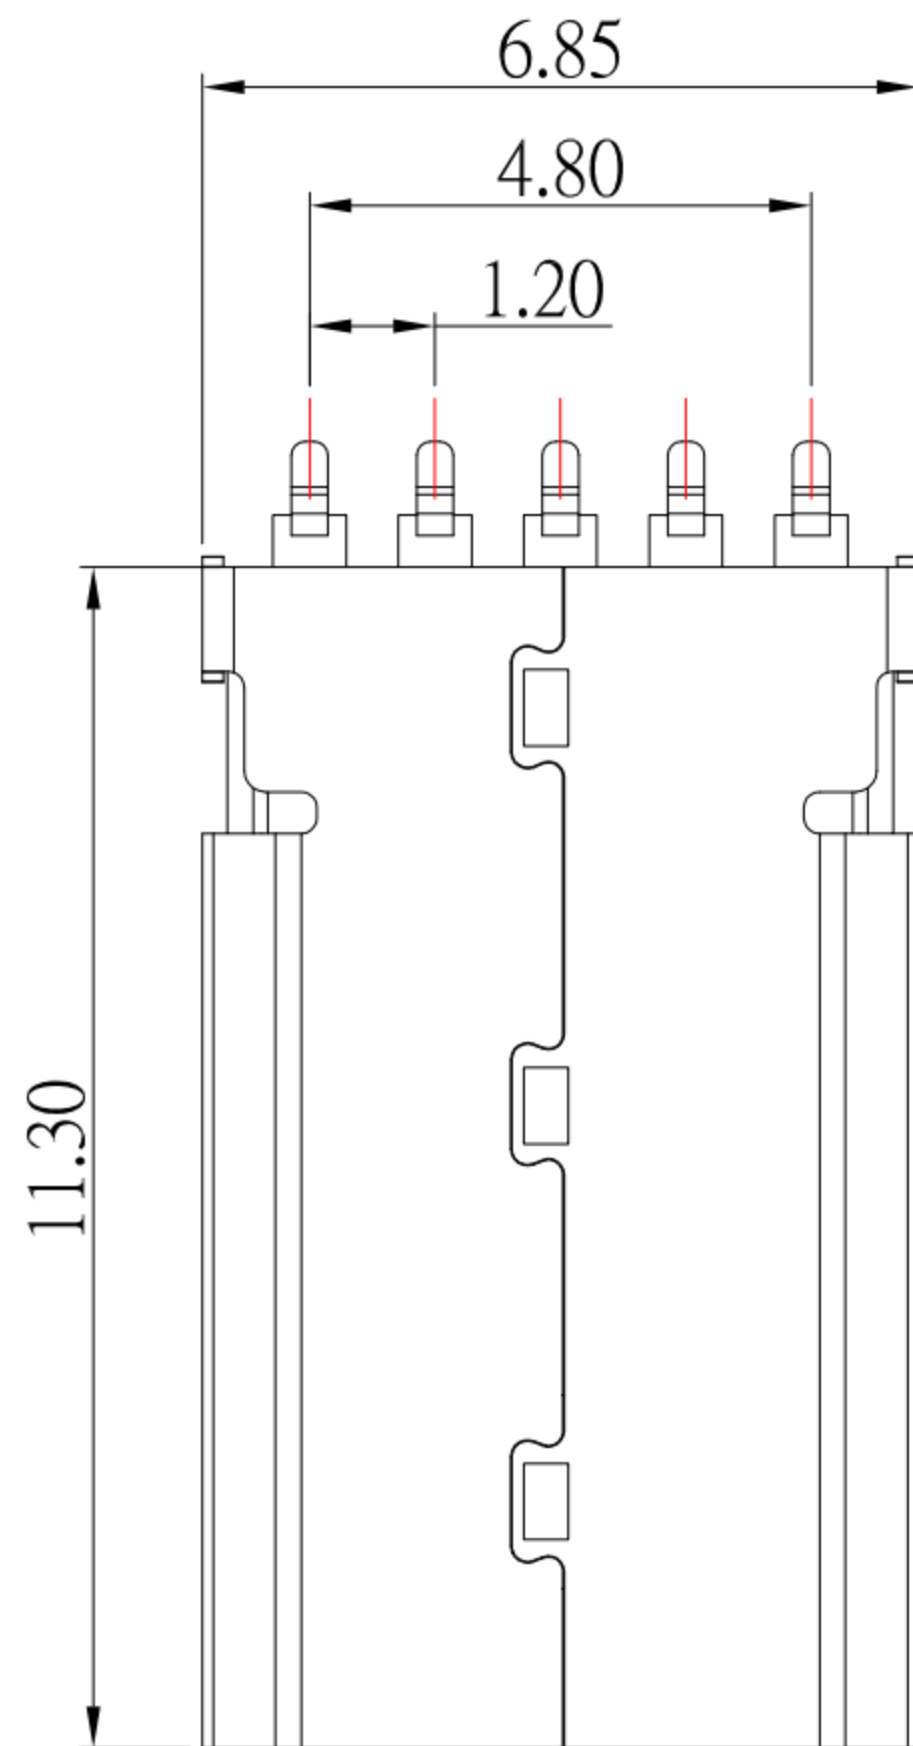
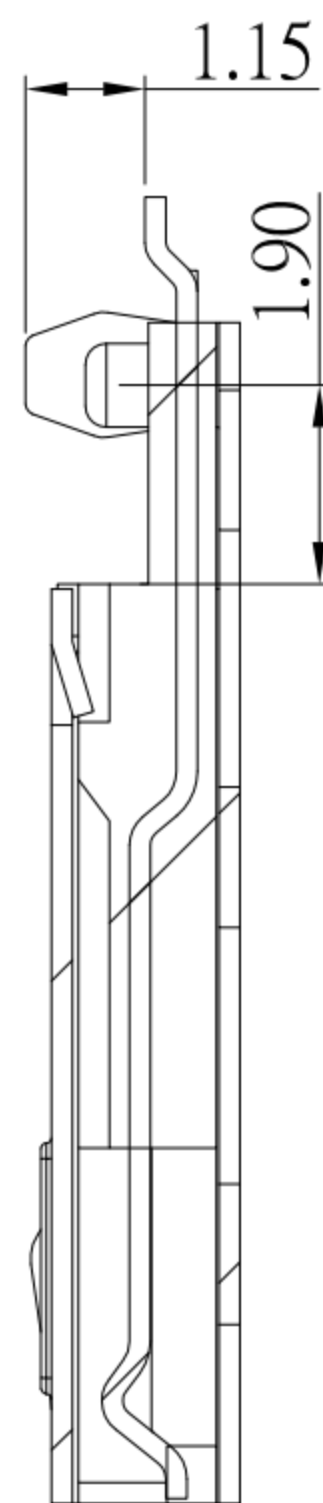


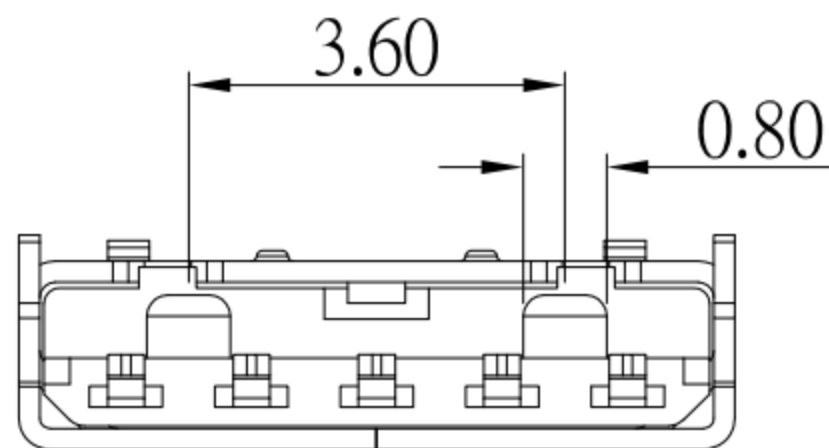

PCB LAYOUT MOUNTING PATTERN

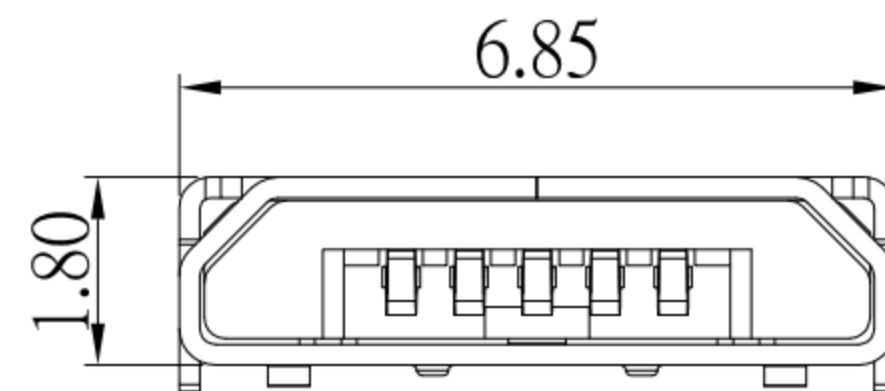

Pin Assignments

Contact No.	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
SHELL	Shield

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.8 A(Pin1,Pin5) / 1.0 A(Pin2,3,4)
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Insulation Resistance: 100 MΩ Min


Environmental:

- 1.Operaring Temperature: -20°C ~ 85°C



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	03/10/21	FINISH		MODLE	MICRO USB 5 P 公頭貼板反向
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5PLM3-S235
Jacky Chen	03/10/21	SHEET NO.	1 of 1	PART NO.	MRUSB-5PLM3-S235
APPROVED BY:	DATE				
Tony Kao	03/10/21				