


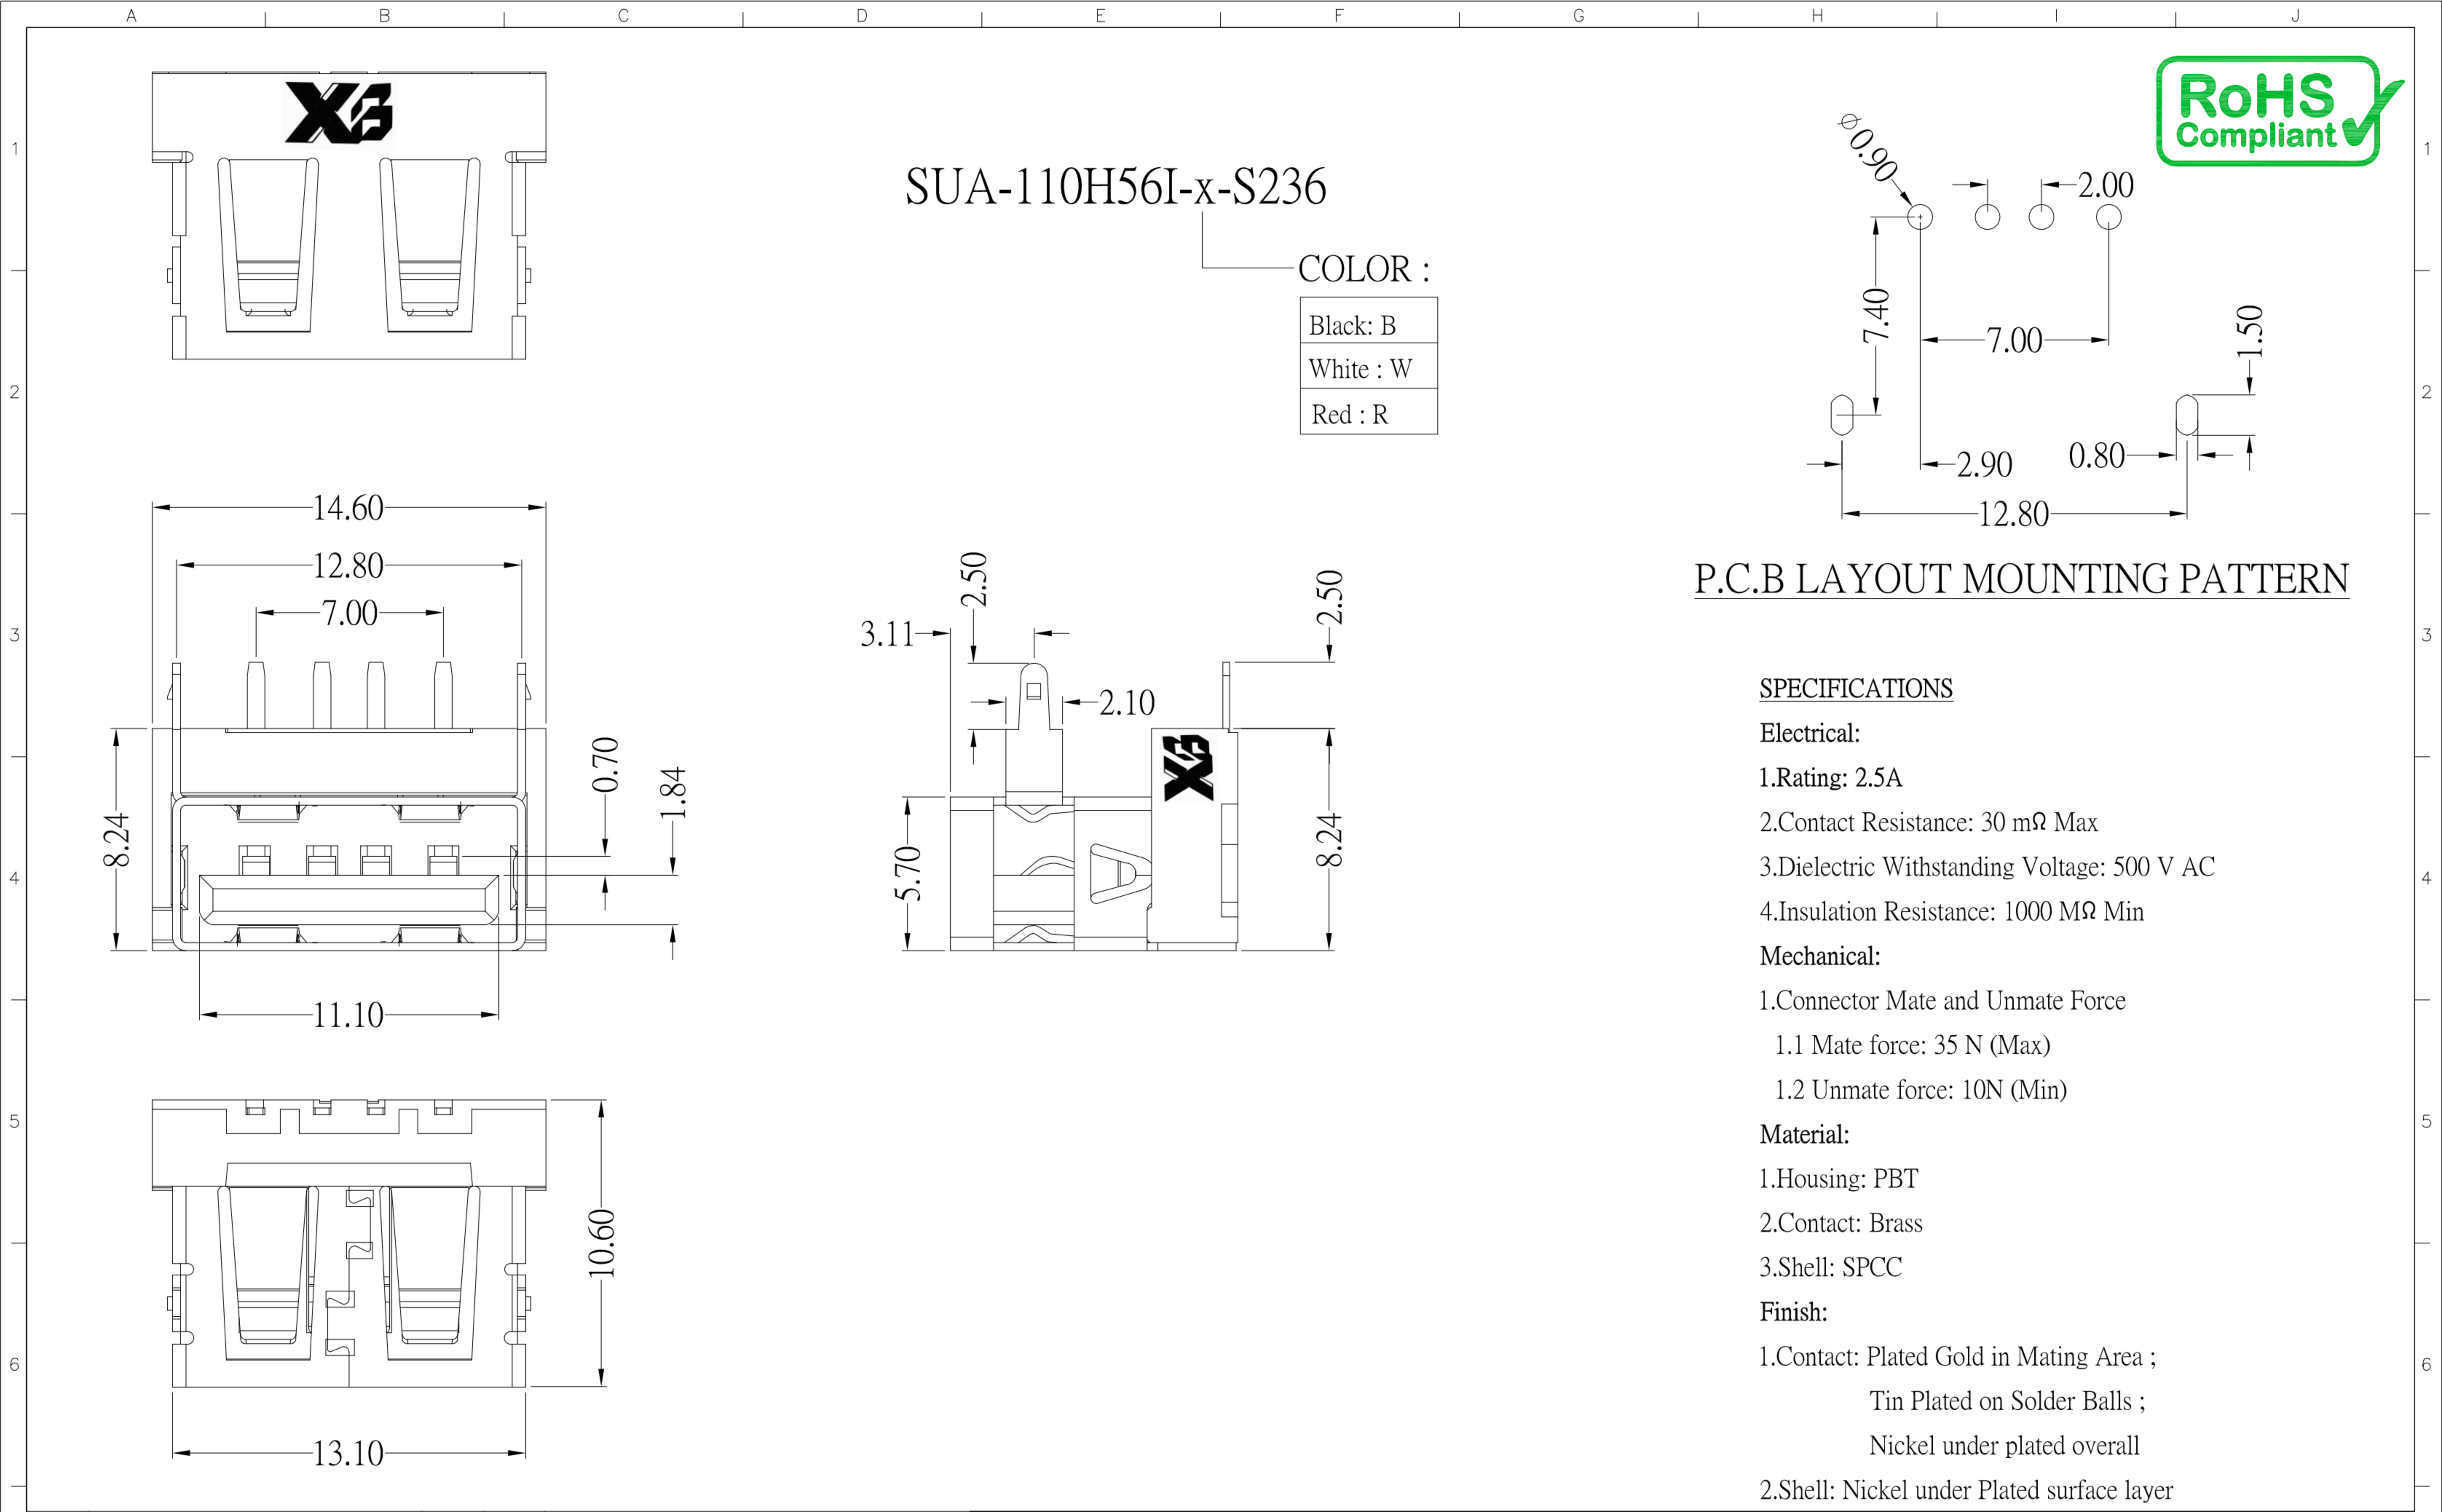

SUA-110H56I-x-S236

COLOR :

Black: B

White : W

Red : R

SPECIFICATIONS

Electrical:

- 1.Rating: 2.5A
- 2.Contact Resistance: 30 mΩ Max
- 3.Dielectric Withstanding Voltage: 500 V AC
- 4.Insulation Resistance: 1000 MΩ Min

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 35 N (Max)
 - 1.2 Unmate force: 10N (Min)

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM				DRAWN BY: Jack Lu		DATE: 03/31/21		MAT'L		TITLE: CONNECTOR		
								CHECKED BY: Jacky Chen		DATE: 03/31/21		FINISH		MODLE: USB AF 短體10.6 前2腳 加高H8.24mm		
								APPROVED BY: Tony Kao		DATE: 03/31/21		SCALE: 1 : 1		DWG NO. SUA-110H56I-x-S236		SIZE: A4
ITEM NO. DESCRIPTION								DRAWN		DATE		SHEET NO. 1 of 1		PART NO. SUA-110H56I-x-S236		VER: R3
A B				C D		E F		G H		I J						