



SUA-110V5Bx-x-S236

SHELL : COLOR :

Blank : Brass

Black: B

I : SPCC

White : W

SPECIFICATIONS

Electrical:






- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC
- 3.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

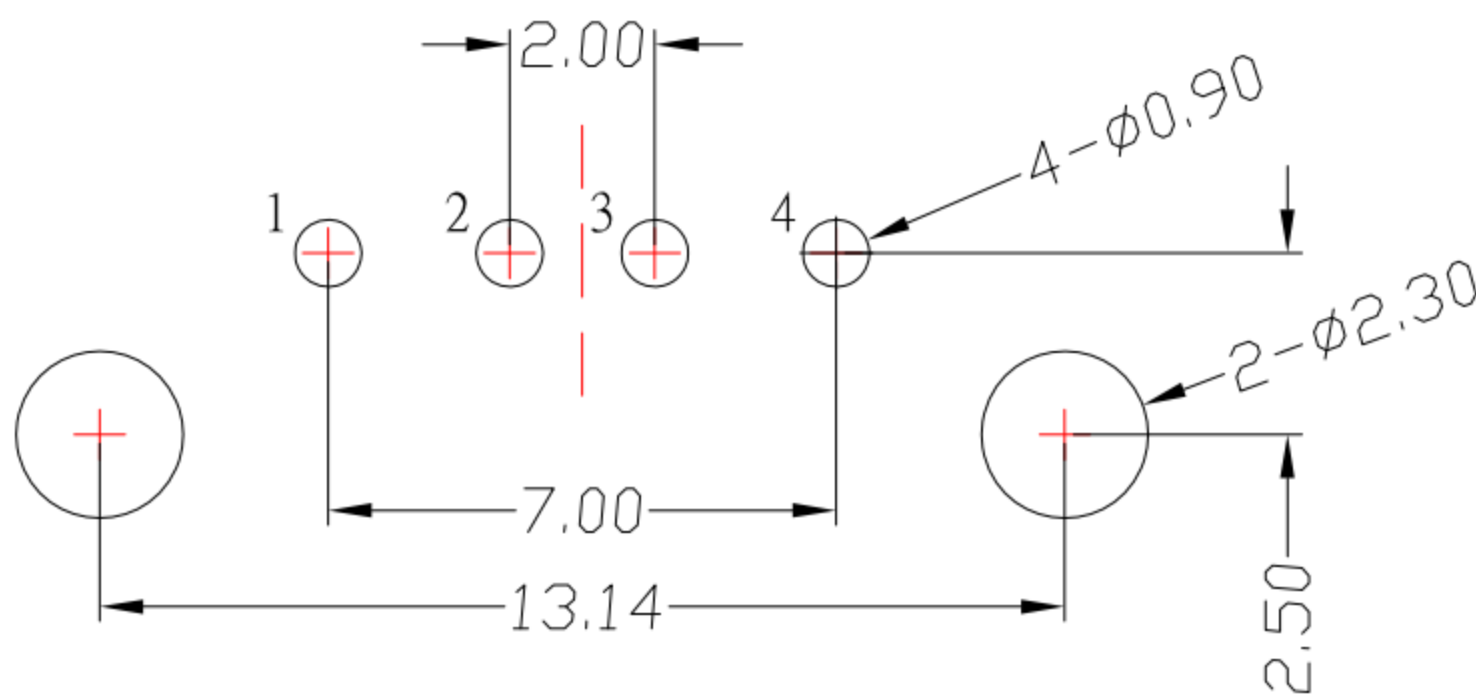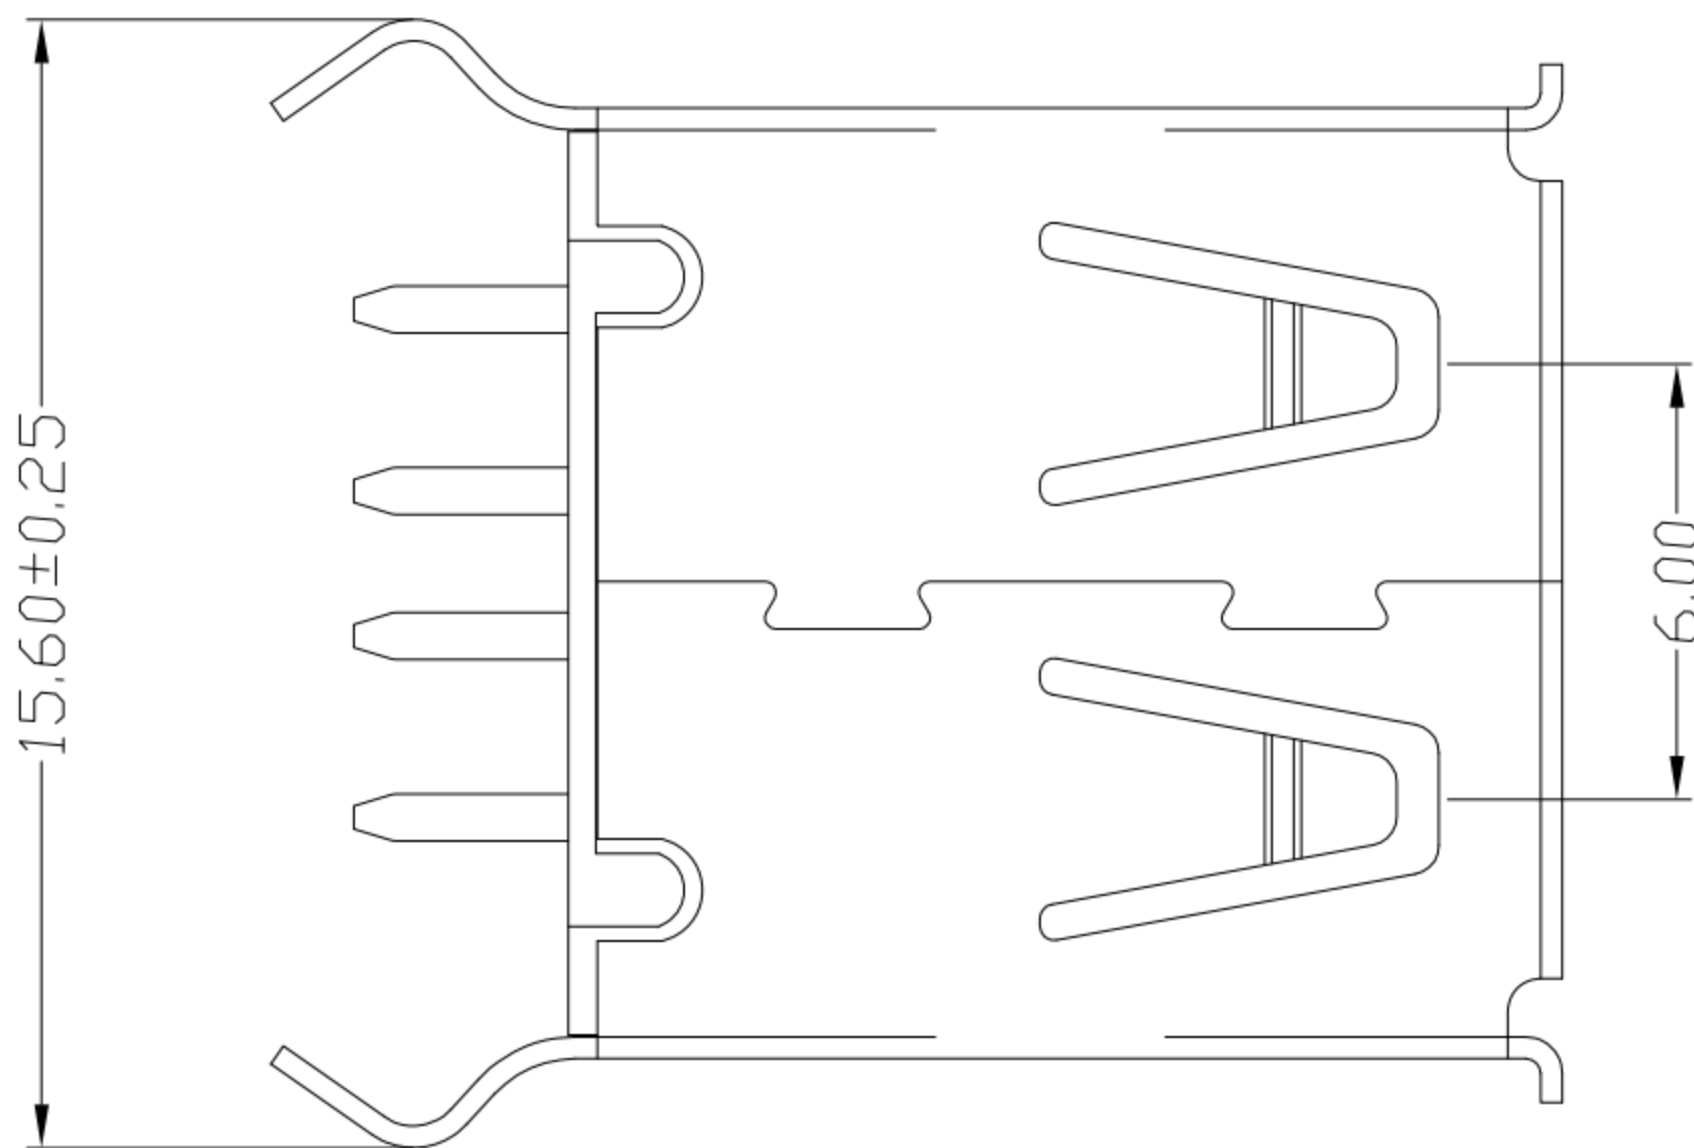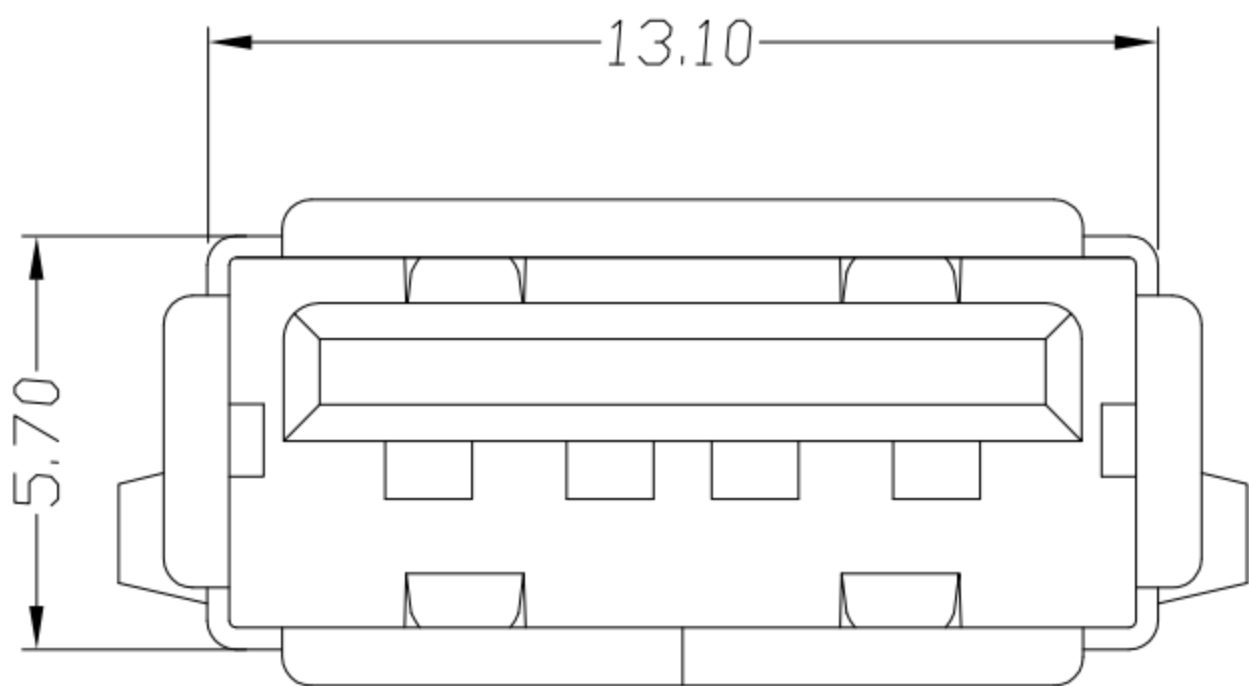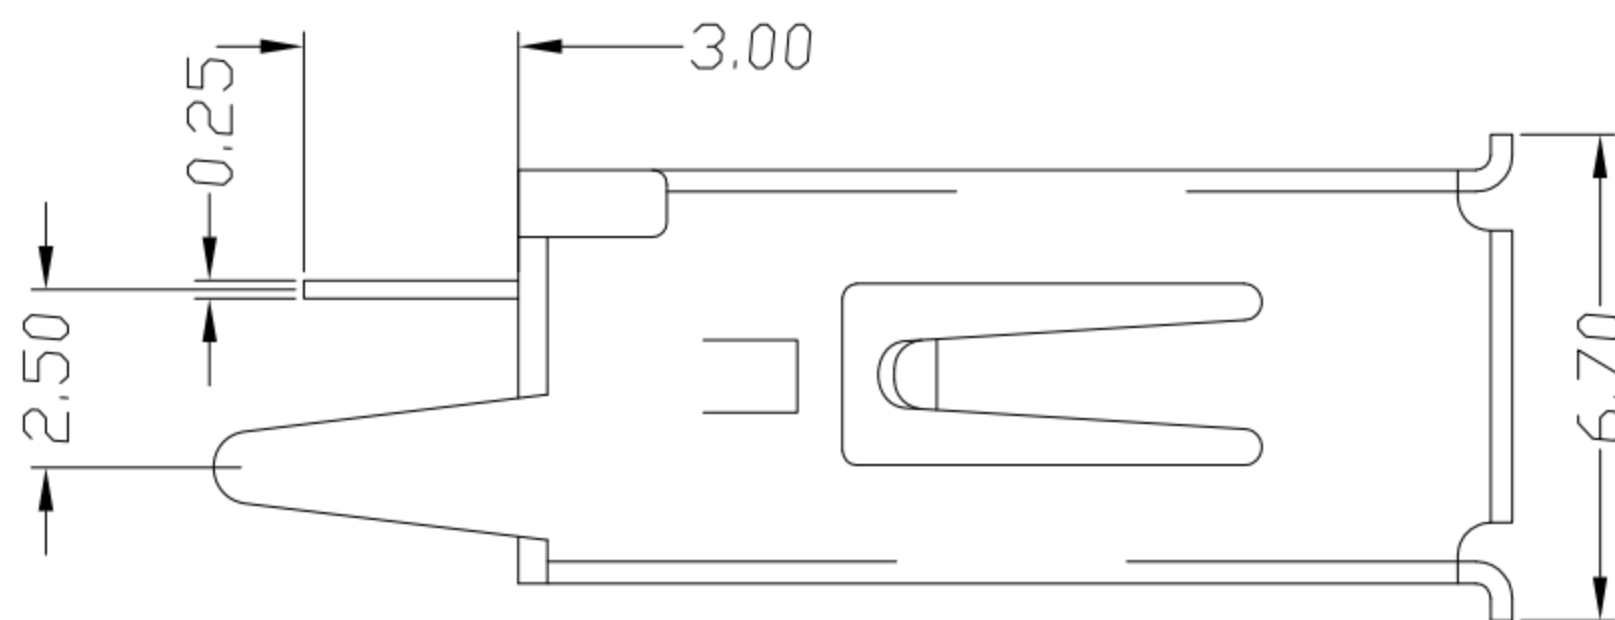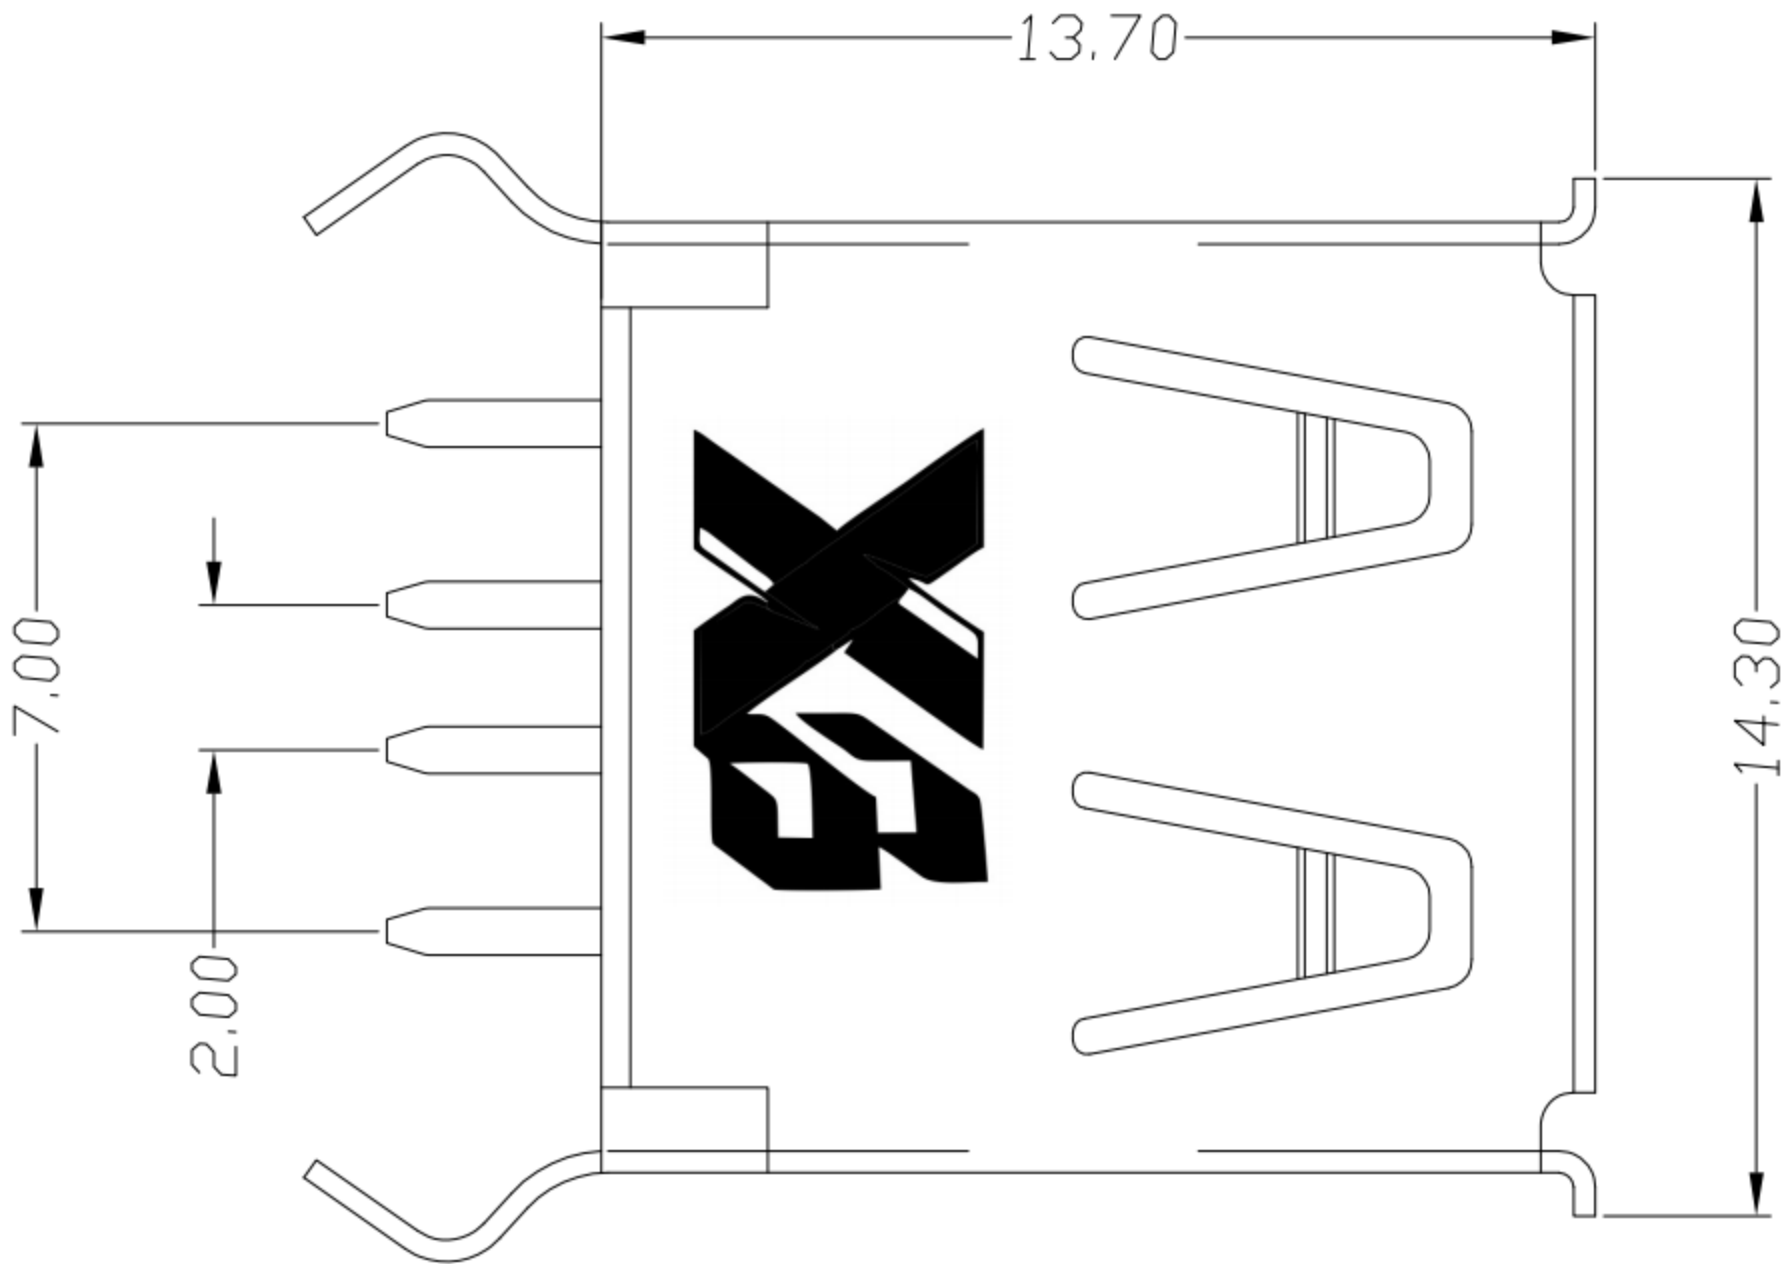


P.C.B LAYOUT MOUNTING PATTERN



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	04/11/19				
CHECKED BY:	DATE	FINISH		MODLE	USB A/F 直立式 插板彎腳有捲邊
Jacky Chen	04/11/19				L:13.7mm 腳距 2.50mm
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	SUA-110V5Bx-x-S236
Tony Kao	04/11/19	SHEET NO.	1 of 1	PART NO.	SUA-110V5Bx-x-S236
					SIZE A4
					VER R