
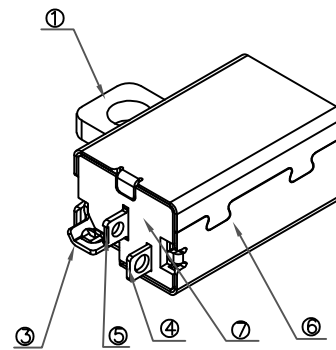
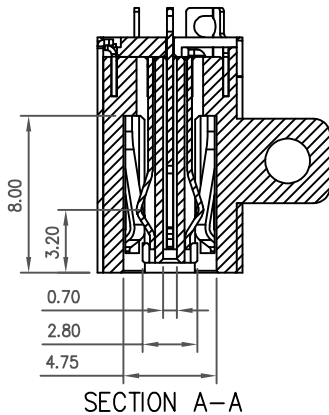
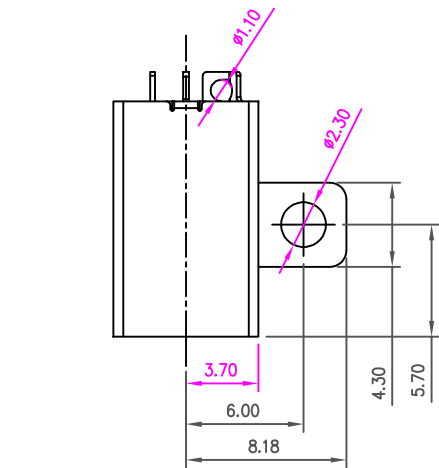


扭力测试点

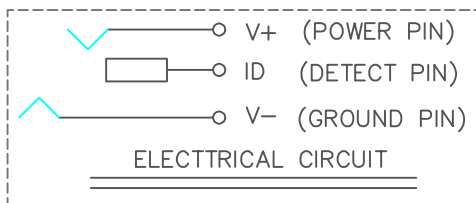

NOTES:

1. ELECTRICAL CHARACTERISTICS:

1.1.RATED: 20V 4A

1.2.CONTACT RESISTANCE: 10mΩMAX For Power and Ground.(INITIAL)
30mΩMAX For Detect.(INITIAL)

1.3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.

1.4.INSULATION RESISTANCE: 100MΩMIN.MEASURED BY 500V DC.

2. MECHANICAL CHARACTERISTICS:

2.1.INSERTION FORCE : 2.0Kgf Max.

2.2.WITHDRAWAL FORCE: 0.7Kgf~2Kgf.(Initial).


1.10Kgf Min. Abusive Test 500 CYCLES

0.6Kgf~2Kgf. AFTER 5000 Life CYCLES

0.5Kgf~2Kgf . AFTER 15000 Life CYCLES

2.3. LIFE TEST: 15000 CYCLES Min.

3. ENVIRONMENTAL: OPERATION TEMPERATURE: -40°C~+85°C

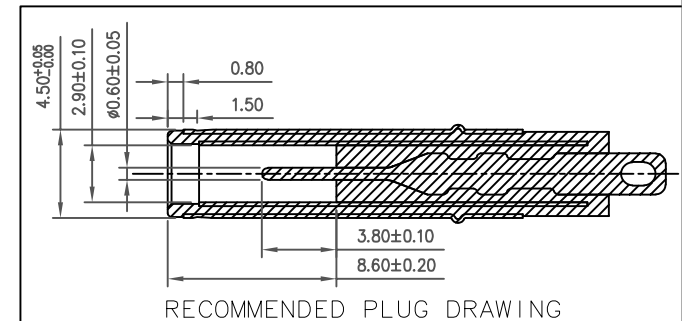

⑦ Cover	PA66	UL94V-0 Color: Black	1	
⑥ Shell	C5210	50u" Min. Weldable nickel Plating Solder	1	
⑤ Detect Pin	C5210	100u" Min. Matte Tin Plating Over All 50u" Min. Nickel Plating Over All	1	
④ Power Pin	C5210	100u" Min. Matte Tin Plating Over All 50u" Min. Nickel Plating Over All	1	
③ Ground Pin 2	C5210	100u" Min. Matte Tin Plating Over All 50u" Min. Nickel Plating Over All	1	
② Ground Pin 1	C5210	100u" Min. Matte Tin Plating Over All 50u" Min. Nickel Plating Over All	1	
① Housing	PA66	UL94V-0 Color: Black	1	
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY

UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	GAO.PENG	PART NAME:
DIM	TOL	DIM	TOL		2022.8.11	
X.	±0.50	X.	±2°	CHECK:		DC JACK
X.X	±0.30	X.X	±1°			PART NO.
X.XX	±0.20	X.XX		APPROVED	HE.LONG.FEI	XB-DC-450060-1209-20000H
X.XXX	±0.10	X.XXX			2022.8.11	SHEET: 1/1
3RD ANGLE PROJECTION		UNIT: mm		DRAWING NO		REV.: A1

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------