

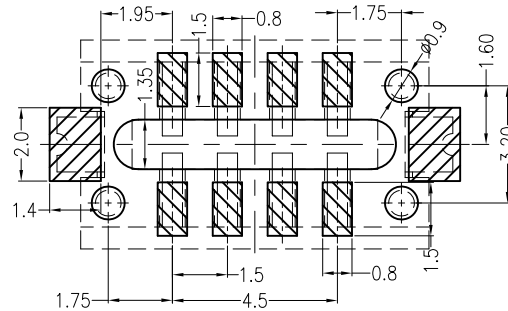





REV	ECN No.	DESCRIPTION	DESIGN	DATE
A1		Release	吴丹平	2015.01.23
A3		基材材质PA9T变更为LCP	蒋建银	2018.08.13
A4		改善插座导向	蒋建银	2018.09.12
A5		改善簧片接触可靠性	曾令青	2019.07.17

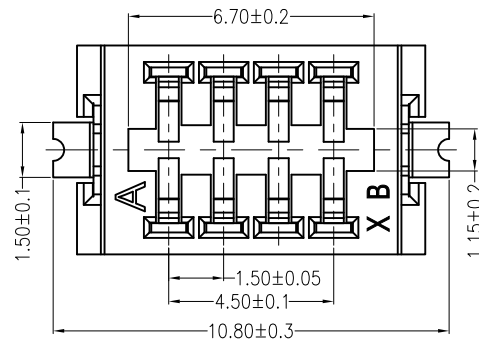

Board Layout

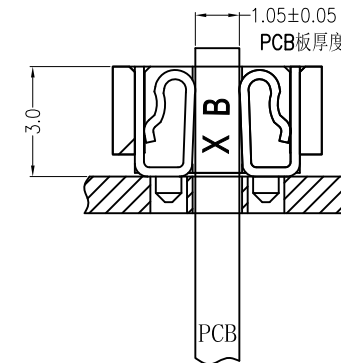

Assembly Layout


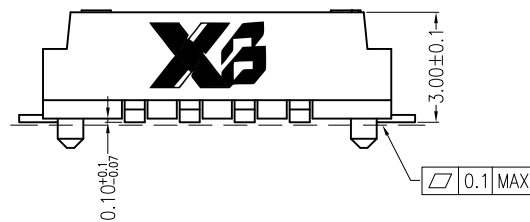


主要技术参数 Main Specifications

线 数 (Poles): 02 to 12
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 125V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 800V AC/minute
温度范围 (Temperature Range): $-40^\circ\text{C} \sim +110^\circ\text{C}$

ORDER INFORMATION:

XB-L029-08-F4MB1-*	
PART No. _____	PACKAGING: _____
No. FOR CIRCUITS: _____	P=PE
08	G=TUBE
PLASTIC MATERIAL: _____	R=REEL
F4M=LCP (BEIGE)	Metal code: _____
	1=PhosphorBronze
	PLATING: _____
	B=MATTE Sn

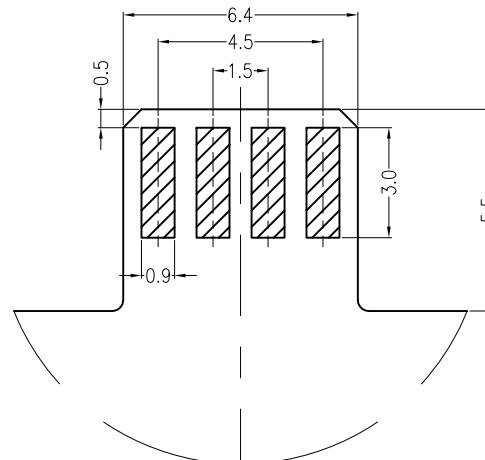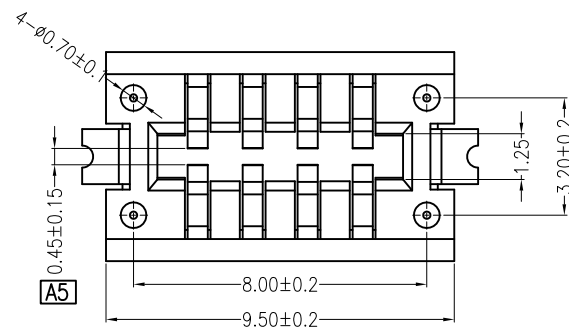

Mating PCB detail

C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	8 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE: - 1.5mmPITCH 180°WAFER SMT TYPE		
X.±0.5	X.±5°	USE:	PART NO.:	
.X±0.3	.X±2°	CUSTOMER	L029-08-F4MB1-*	
.XX±0.25	.XX±1°	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田 峰	GCCP-0053	
		DR: 蒋建银	SCALE	SHEET
	UNITS: mm		1 : 1	1 / 1