

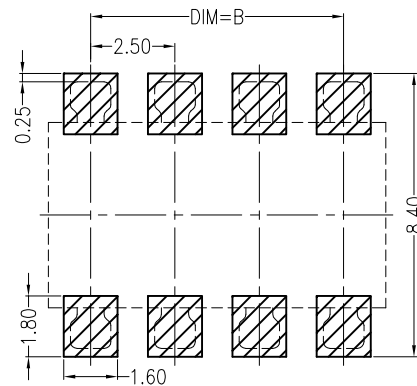
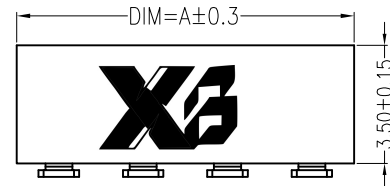
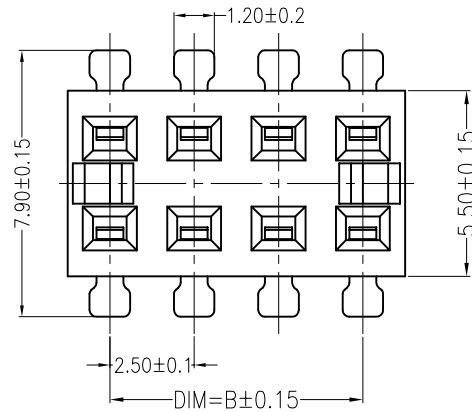
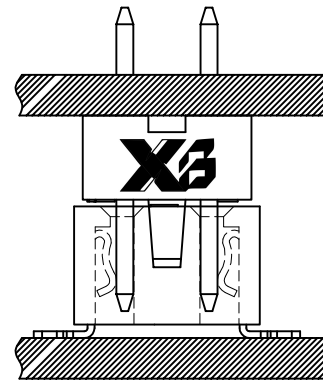


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	李润	2015.12.28



Board Layout
General Tolerance: ± 0.05

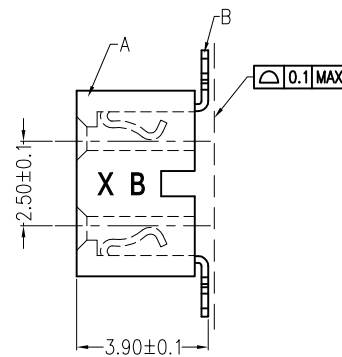

Assembly Layout

主要技术参数 Main Specifications

线 数 (Poles): 04 to 12
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
 额定电压 (Rated voltage): 125V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-40^\circ\text{C} \sim +110^\circ\text{C}$

ORDER INFORMATION:

XB-L041AWV-***-B1MB-R

PART No. _____
 No. FOR CIRCUITS: _____

 PLASTIC MATERIAL: _____
 B1M=PA46 (BEIGE)
 PACKAGING: R=REEL
 PLATING: B=MATTE Sn

Circuit	Dimensions (mm)	
	DIM=A	DIM=B
L041AWV-2X2	5.00	2.50
L041AWV-2X3	7.50	5.00
L041AWV-2X4	10.00	7.50
L041AWV-2X5	12.50	10.00
L041AWV-2X6	15.00	12.50

C				
B	CONTACT	4~12PCS	PhosphorBronze	MATTE Sn
A	HOUSING	1 PCS	PA46	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
X.±0.5	X.±5°	USE: CUSTOMER	TITLE: - 2.5mmPITCH 180°WAFER DIP TYPE	
.X±0.3	.X±2°		PART NO.: L041AWV-***-B1MB-R	
.XX±0.25	.XX±1°		DWG NO.: GCCP-0205	
--	--	CHKD: 田 峰	SCALE 1 : 1	
UNITS: mm		DR: 吴丹平	SHEET 1 / 1	