
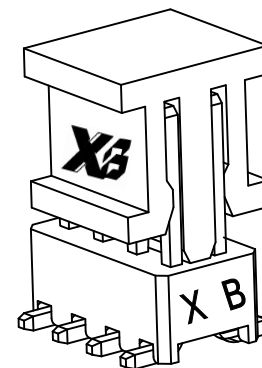
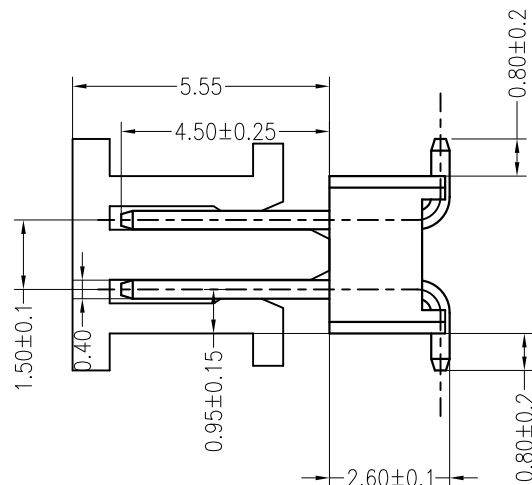


REV	DESIGN	DATE
A0	蒋建银	2019.02.28
-	-	-

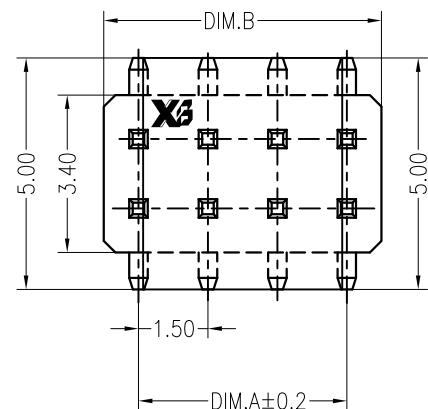


主要技术参数 Main Specifications

线 数 (Poles): 04 to 16
 接触电阻 (Contact resistance): $\leq 30m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-40^{\circ}C \sim +110^{\circ}C$


ORDER INFORMATION:

XB-L1501AWV-2**-F6MB2-R-2		Special code: 2=4.5*0.8
PART No.:		PACKAGING: R=REEL
No.OF CIRCUITS: 2*2~2*8		Metel code: 2=Brass
PLASTIC MATERIAL: F6M=LCP(BEIGE)		
PLATING: B=MATTE Sn		

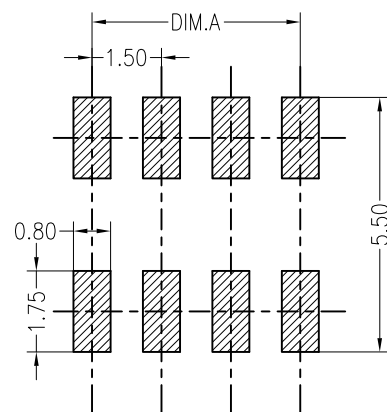

Board Layout

General Tolerance: ± 0.05

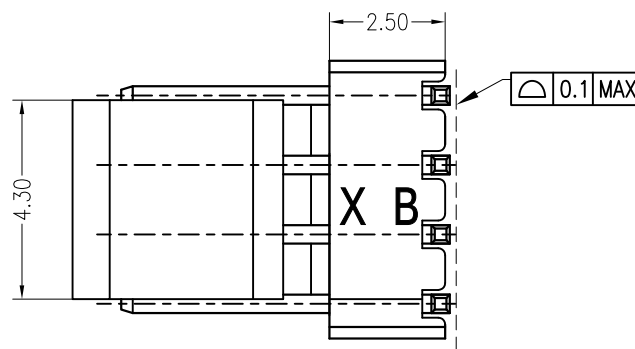

PIN.	DIM A	DIM B				
2*2	1.50	3.00	C	CAP	1 PCS	LCP
2*3	3.00	4.50	B	CONTACT	** PCS	Brass
2*4	4.50	6.00	A	HOUSING	1 PCS	LCP
2*5	6.00	7.50	ITEM	COMPONENT	Q'TY	MATERIAL
2*6	7.50	9.00				FINISH
2*7	9.00	10.50				
2*8	10.50	12.00				

 东莞市溪榜电子有限公司
 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE: -
PART NO.: L1501AWV-2**-F6MB2-R-2
DWG NO.:
SCALE 1 : 1
SHEET 1 / 1