
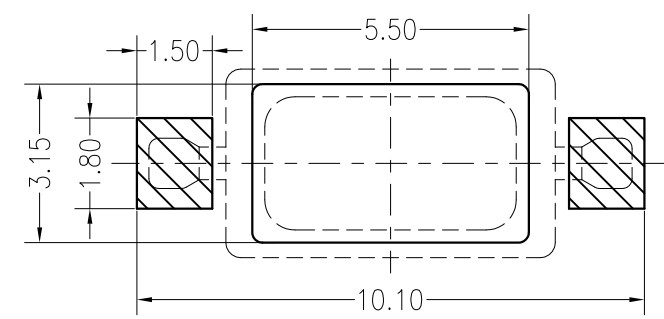
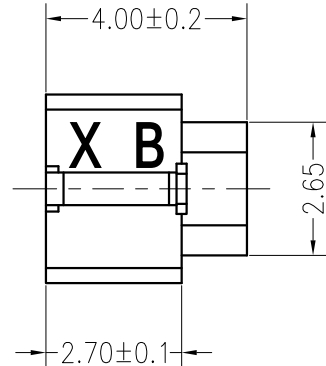


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	-	2018.11.22
A1		Change the tolerance	Fangsongle	2020.06.29

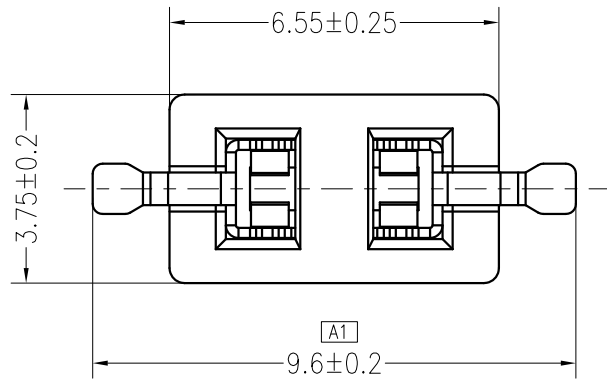




Board Layout
General Tolerance: ± 0.05

主要技术参数 Main Specifications

线 数 (Poles): 02
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 800V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

XB-L2502AFV-02-F6MB1-R				
PART No.				
No. FOR CIRCUITS: 02				
PLASTIC MATERIAL:				
F6M=LCP (BEIGE) PLATING: B=MATTE Sn				
			PACKAGING: R=REEL	
			Metal code: 1=Phosphor bronze	

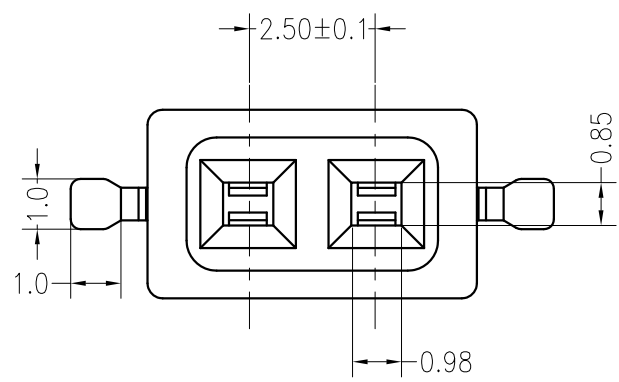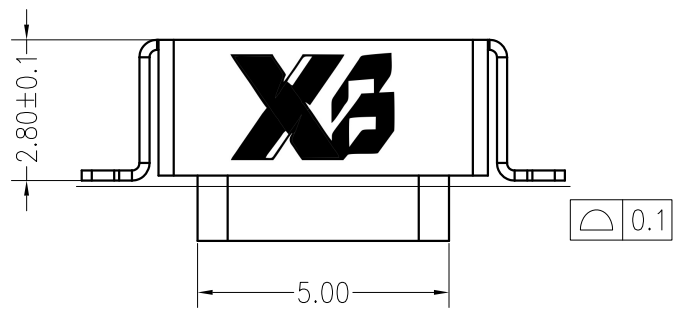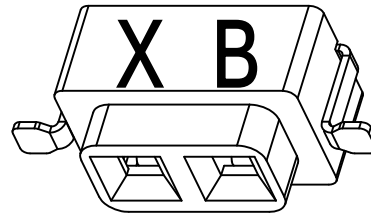

C				
B	CONTACT	2 PCS	Phosphor bronze	TIN-plated
A	pedestal	1 PCS	LCP	UL 94V-0, COLOR: BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
TITLE: L2502AFV-02				
X.±0.5	X.±5'	USE:	PART NO.:	
.X±0.3	.X±2'	CUSTOMER	L2502AFV-02-F6MB1-R	
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	SCALE	
⊕	UNITS: mm	DR: 蒋建银	1 : 1	SHEET 1 / 1