


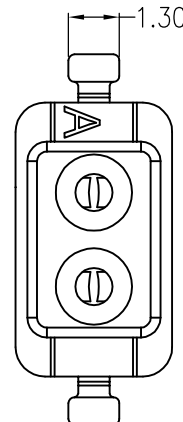


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	曾令青	2019.04.03

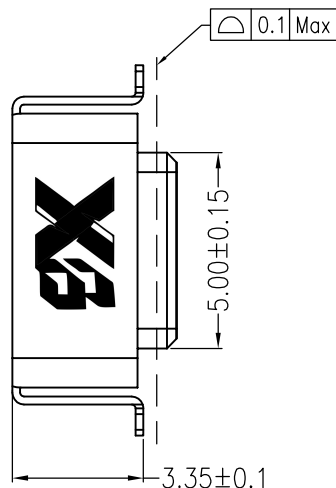

Assembly Layout

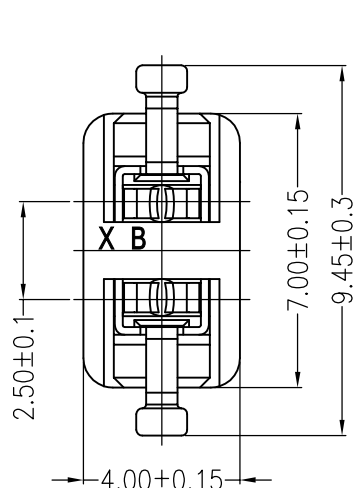

主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance): $\leq 20m\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$

额定电压 (Rated voltage): 275V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电 压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range): $-40^{\circ}C \sim +120^{\circ}C$

ORDER INFORMATION:

XBL2503AFV-02-F2MB1-R

PART No.

No. FOR CIRCUITS:

02

PLASTIC MATERIAL:

F2M=LCP (BEIGE)

PLATING:

B=MATTE Sn



PACKAGING:

R=REEL

P=PE


Metal code:

1=Phosphor bronze

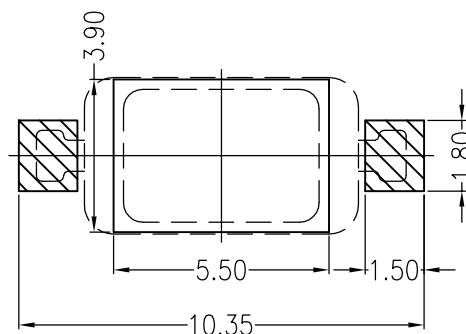

Board Layout

General Tolerance: ± 0.05

C					
B	CONTACT		2 PCS	Phosphor bronze	TIN-plated
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO.,LTD				TITLE: 2.5mmPITCH 180°WAFER SMT TPY	
X.±0.5		X.±5'	USE:		PART NO.:
.X±0.3		.X±2'	CUSTOMER		L2503AFV-02-F2MB1-R
.XX±0.25		.XX±1'	APPD: 邵敬和		DWG NO.:
--		--	CHKD: 曾令青		JKUN-GCKH-1382
		UNITS: mm	DR: 蒋建银		SCALE 1 : 1
					SHEET 1 / 1