

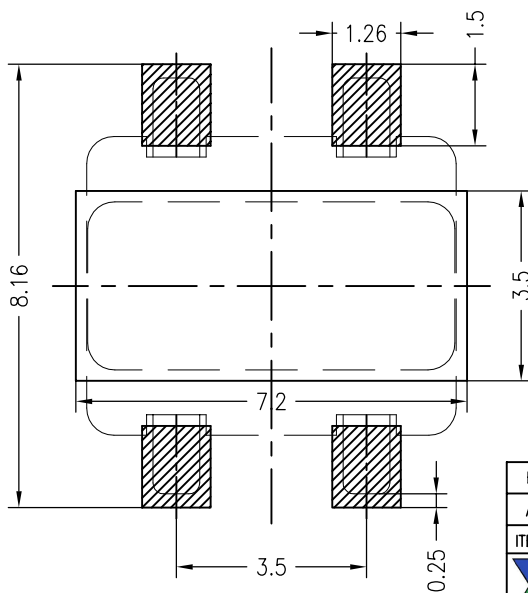
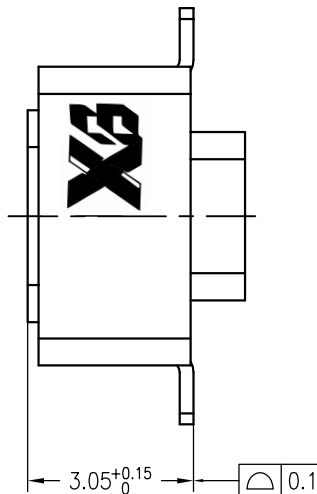
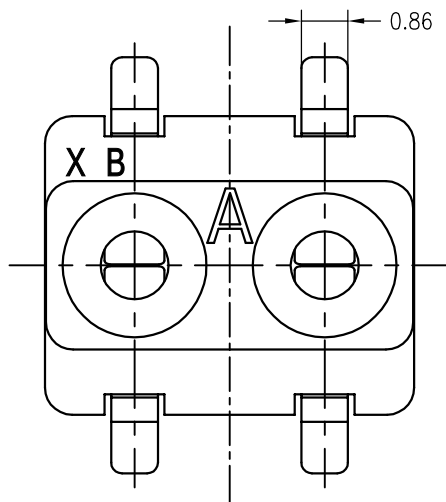
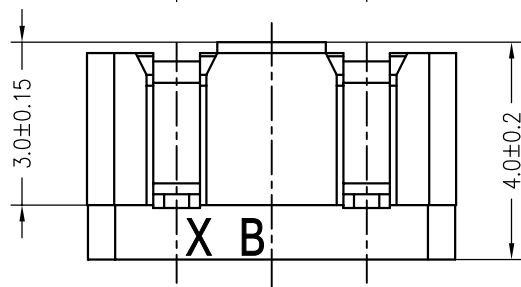


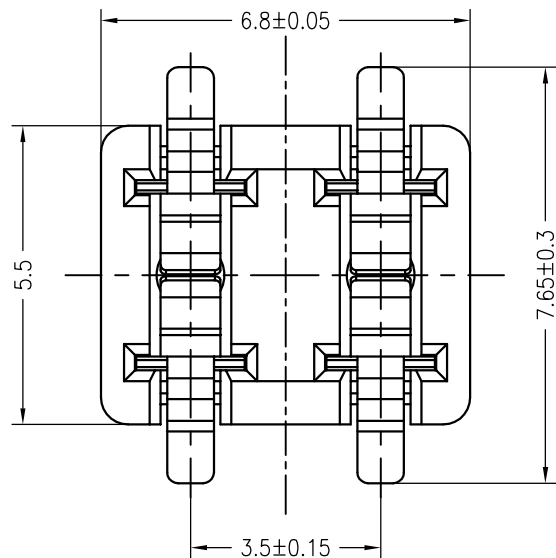

Board Layout
General Tolerance: ± 0.05

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2017.03.23

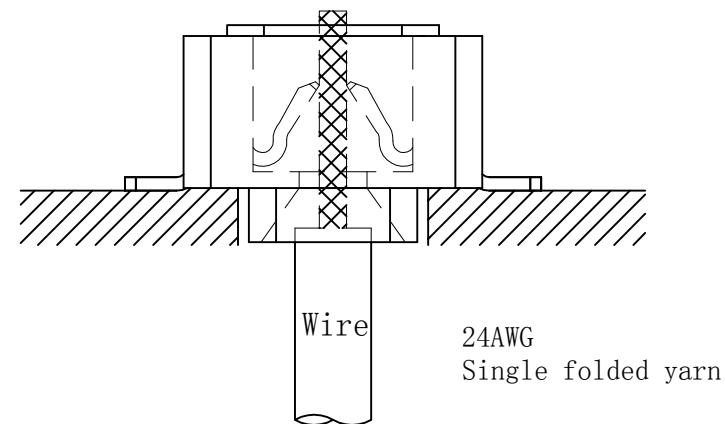

主要技术参数 Main Specifications

线 数 (Poles): 02
接触电阻 (Contact resistance): $\leq 30\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 275V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$

ORDER INFORMATION:

XB-L3501AFV-02-F2MB1-*	
PART No.	PACKAGING:
No. OF CIRCUITS:	R=REEL
02	P=PE
PLASTIC MATERIAL:	Metal code:
F2M=LCP(BEIGE)	1=PhosphorBronze
	PLATING:
	B=MATTE Sn

B	CONTACT	4 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
TITLE:				-
PART NO.:				L3501AFV-02-F2MB1-*
DWG NO.:				
SCALE				SHEET
1 : 1				1 / 1