

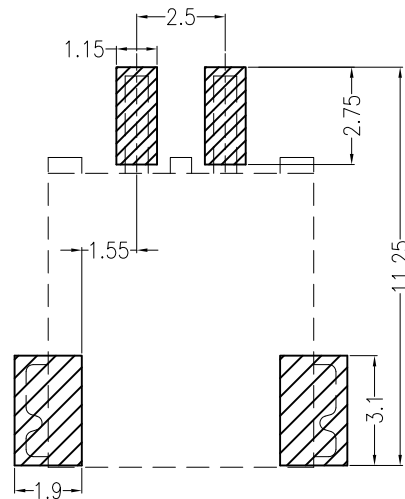
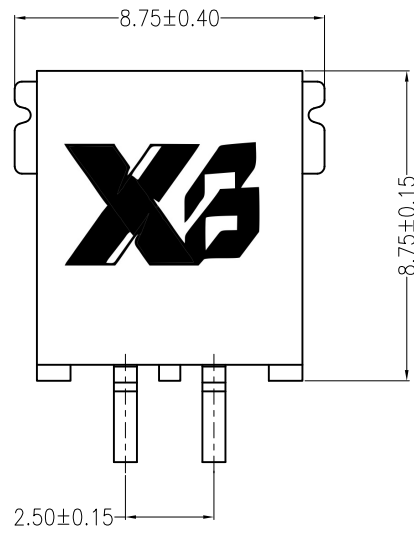
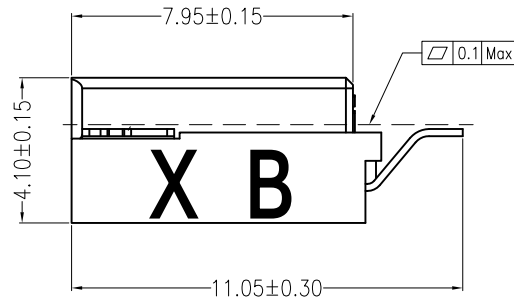



REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	FangSongLe	2020/07/24



Board Layout



Mating Aluminum plate detail

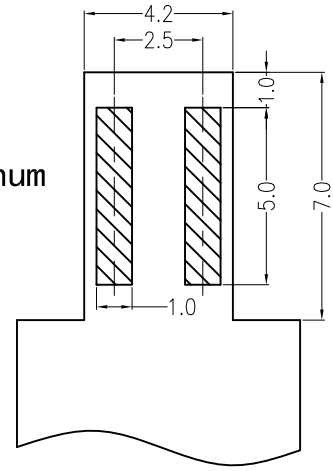

Specifications:
Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
Rated voltage: 250V AC DC
Rated current: 2.0A AC DC
Withstand Voltage: 1000V AC/minute
Temperature Range: $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$
Housing: LCP UL94V-0, BEIGE
Contacts: Phosphor Bronze/MATTE Sn-plated

ORDER INFORMATION:

XB-L035B-02-F3MB1-R			
PART No.		PACKAGING: R=REEL	
No.OF CIRCUITS: 02		Metal code: 1=Phosphor Bronze	
PLASTIC MATERIAL: F3M=LCP (BEIGE)		PLATING: B=MATTE Sn	

东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE: 2.5mmPITCH 90°WAFER SMT TYPE	
GENERAL TOLERANCE		PART NO.:	
X. ± 0.50	X. $\pm 5^{\circ}$	L035B-02-F3MB1-R	
X.X ± 0.30	X.X $\pm 2^{\circ}$	DWG NO.:	
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	SCALE	
UNITS: mm		1 : 1	
USE: CUSTOMER		SHEET	
APPD: WangFeng		1 / 1	
CHKD: Steven			
DR: FangSongLe			