
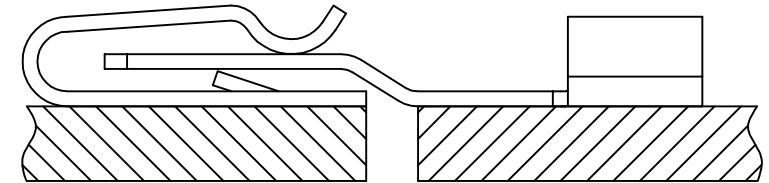



REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

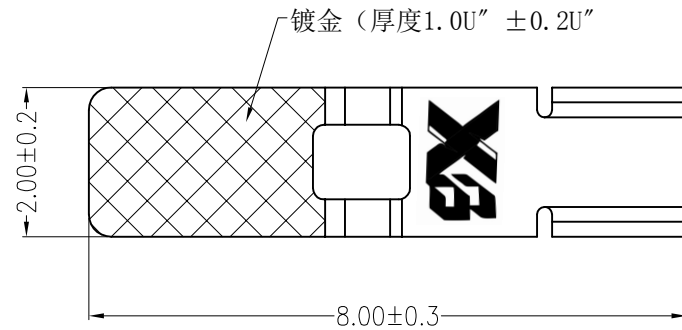




Assembly Layout

主要技术参数 Main Specifications

线数 (Poles): 01
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 3.0A AC DC
耐电压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$


ORDER INFORMATION:


XB-L059A-01-T2CE-R			
PART No.			PACKAGING:
No. FOR CIRCUITS:			R=REEL
01			
PLASTIC MATERIAL:			PLATING:
T2C=PBR (BEIGE)			E=Gold+Sn

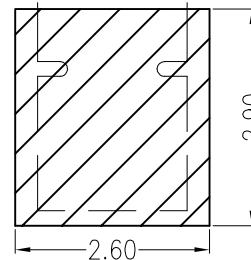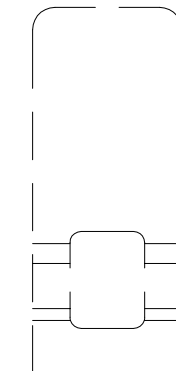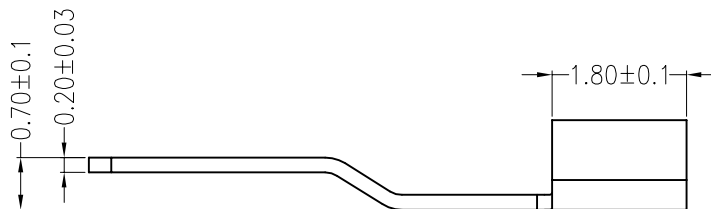

Board Layout

General Tolerance: ± 0.05

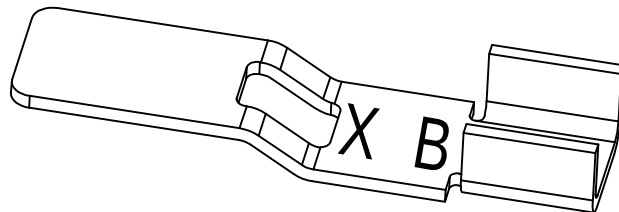

C					
B					
A	CONTACT		1 PCS	PhosphorBronze	Gold+Sn-plated
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: —					
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2'		L059A-01-T2CE-R		
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:		
--	--	CHKD: 田峰	SCALE		
	UNITS: mm	DR: 蒋建银	1 : 1		SHEET 1 / 1