

A

B




C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	Release	蒋建银	2018.10.25

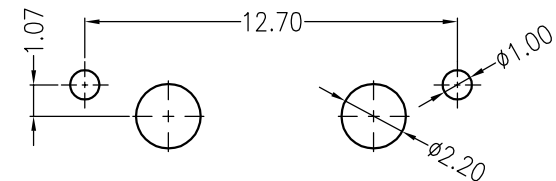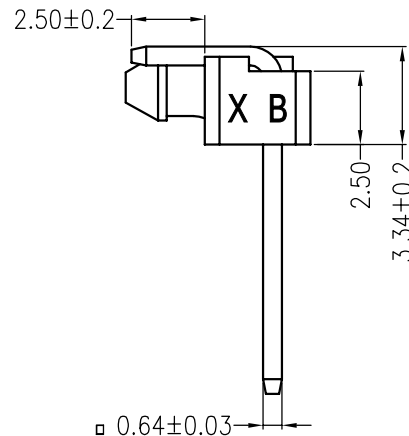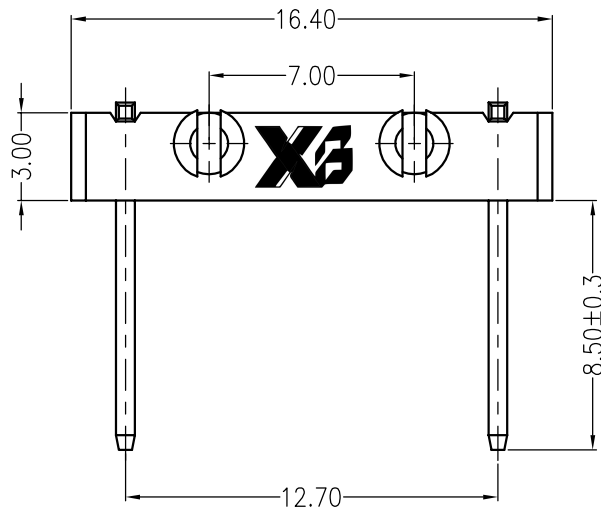

Board Layout
General Tolerance: ± 0.05

主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 2.0A AC DC

耐电压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

XB-L12704AWD-02-A4KB2-P-15

PART No.


No.FOR CIRCUITS:

02

PLASTIC MATERIAL:

A4K=PA66(BLACK)

SPECIAL CODE:
15=弯针8.5*2.5*3.34
PACKAGING:
P=PE
Metal code:
2=Brass
PLATING:
B=MATTE Sn

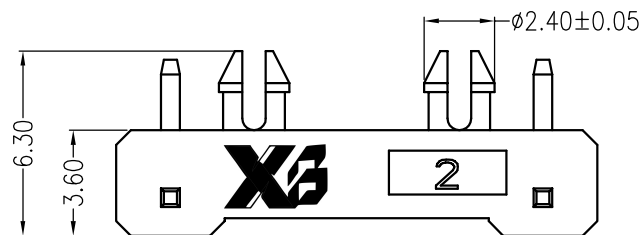

C				
B	CONTACT	2 PCS	Brass	MATTE Sn-plated
A	HOUSING	1 PCS	PA66	UL 94V-0, COLOR:BLACK
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE: L12704AWD
12.7Pitch 90°wafer dip type

.X ± 0.35	X.±	USE:	PART NO.: L12704AWD-02-A4KB2-P-15	
.XX ± 0.25	.X±	CUSTOMER		
.XXX ± 0.15	.XX±	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰		
	UNITS: mm	DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1