

规格型号	DIM A	DIM B
XB-BC-62-2PD160	6.0	3.0
XB-BC-62-3PD160	9.0	6.0
XB-BC-62-4PD160	12.0	9.0
XB-BC-62-5PD160	15.0	12.0
XB-BC-62-6PD160	18.0	15.0
XB-BC-62-7PD160	21.0	18.0
XB-BC-62-8PD160	24.0	21.0

性能:

额定电流: 5.0A

额定电压: 30V

耐电压: 500V

接触电阻: 30mΩ MAX


绝缘电阻: 500MΩ

工作温度: -55℃~+125℃

使用寿命: 10000次以上

塑件(材质): LCP黑色

接触点(材质): 黄铜C2680, 接触面镀金3U"

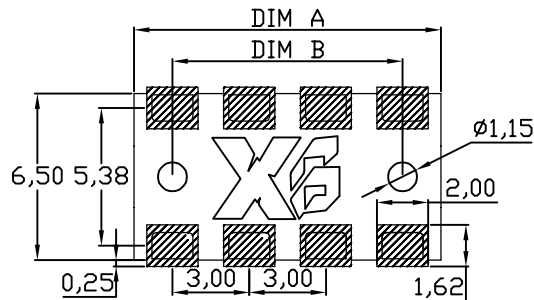

RECOMMENDED PCB LAYOUT

TOP VIEW (.XX±0.05)

版本REV. 更改标记REVISIONNOTE 日期DATE		未注公差 TOLERANCE		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
		X. ±0.35			
		Y.X ±0.25			
		XXX ±0.15			
绘制DRAWN		X.XXX ±0.05		品名ARTICLE:	
设计DES' D	高鹏			电池连接器	
审核CHK' D	杨军	视图方法 PROJECTION		图号MODEL:	
批准APPV' D	贺龙飞	比例SCALE:		XB-BC-62系列母座	
				单位UNIT: mm	页码SHEET: 共1页 第1页