

A

B






C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.04.18

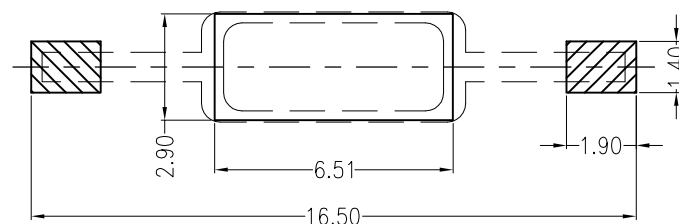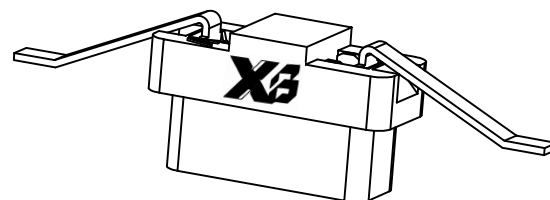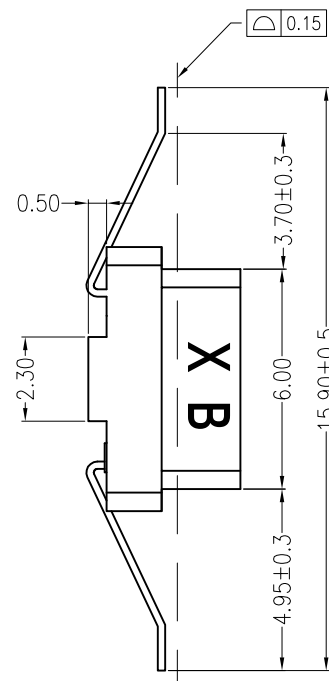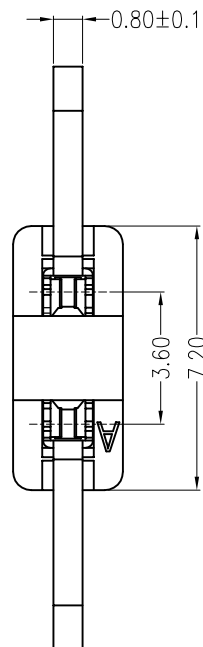

Board Layout

主要技术参数 Main Specifications

线 数 (Poles): 02 to 12

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 125V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电 压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

XB- L020Y-02-F2MB1-* -2		SPECIAL CODE: 2=Big distance
PART No.		PACKAGING: R=REEL P=PE
No.OF CIRCUITS: 04		Metal code: 1=PhosphorBronze
PLASTIC MATERIAL: F2M=LCP(BEIGE)		PLATING: B=MATTE Sn

C				
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司		TITLE: L020Y-02-2*		
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		3.6Pitch 180°wafer smt type		
X.±0.5	X.±5°	USE:	PART NO.:	
.X±0.3	.X±2°	CUSTOMER	L020Y-02-F2MB1-* -2	
.XX±0.25	.XX±1°	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	GCCP-0449	
	UNITS: mm	DR: 吴丹平	SCALE 1 : 1	SHEET 1 / 1