
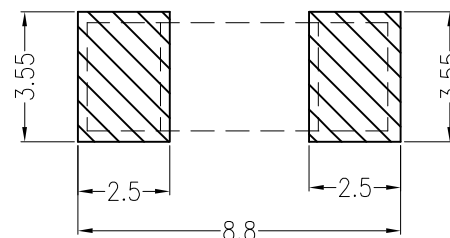
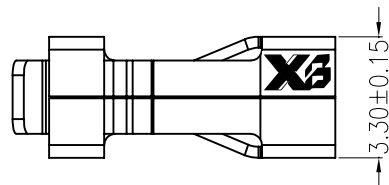
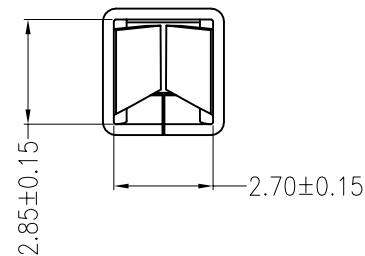


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.06.28

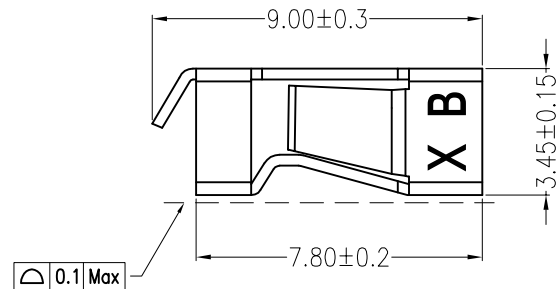


Board Layout

主要技术参数 Main Specifications


线数 (Poles): 01
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance):
 额定电压 (Rated voltage): 250 V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐电压 (Withstand Voltage):
 温度范围 (Temperature Range) : $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

XB-L027-01-T2CB-R			
PART No.			
No. FOR CIRCUITS:			PACKAGING:
01			R=REEL
PLASTIC MATERIAL:			PLATING:
T2C=PBR (BEIGE)			B=MATTE Sn

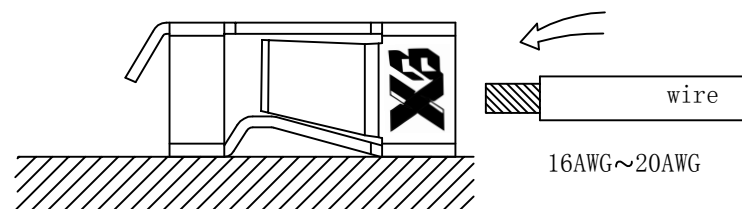

Assembly Layout

C					
B					
A	CONTACT		1 PCS	PhosphorBronze MATTE Sn-plated	
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: - - PART NO.: L027-01-T2CB-R DWG NO.: GCCP-0049 SCALE 1 : 1 SHEET 1 / 1					
X.±0.5	X.±5°	USE: CUSTOMER APPD: 邵敬和 CHKD: 田峰			
.X±0.3	.X±2°				
.XX±0.25	.XX±1°				
--	--	DR: 蒋建银			
 UNITS: mm					