
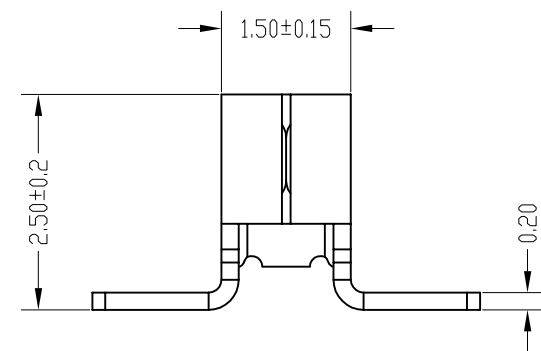



A B C D

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release		2018.05.18

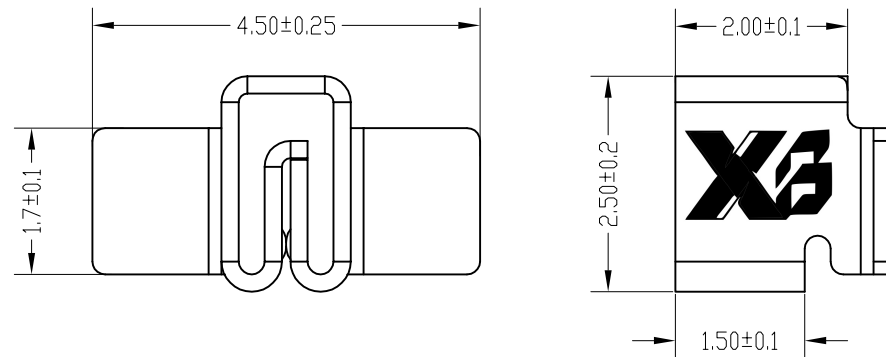


主要技术参数 Main Specifications

板 厚 (thickness): 1.0mm
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
额定电压 (Rated voltage): 275V AC DC
额定电流 (Rated current): 1.0A AC
温度范围 (Temperature Range) : $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

XB-L082K-01-000B1-R			
PART No.			
No. FOR CIRCUITS:			
01			
PLASTIC MATERIAL:			
000=No plastic parts			
		PACKAGING:	
		R=REEL	
		METAL CODE:	
		1=PhosphorBronze	
		PLATING:	
		B=MATTE Sn	

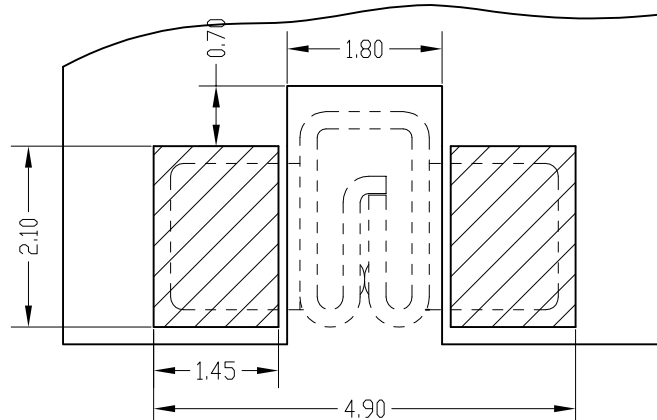

Board Layout

A B C D

C					
B					
A	CONTACT		1 PCS	PhosphorBronze	MATTE Sn-plated
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH	
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD					TITLE: L082K
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.: L082K-01-000B1-R	
.X±0.3	.X±2°	APPD: 蒋建银		DWG NO.: GCKH-1178	
.XX±0.25	.XX±1°	CHKD: 田峰		SCALE 1 : 1	
--	--	DR: 邵敬和		SHEET 1 / 1	
		UNITS: mm	DR:		

D E F