

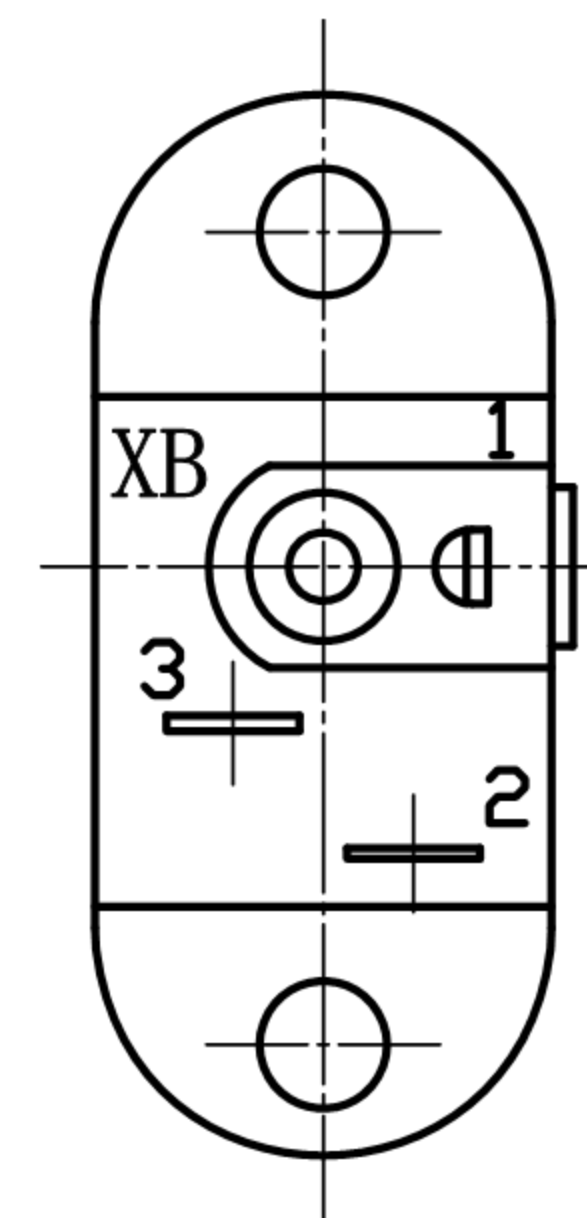


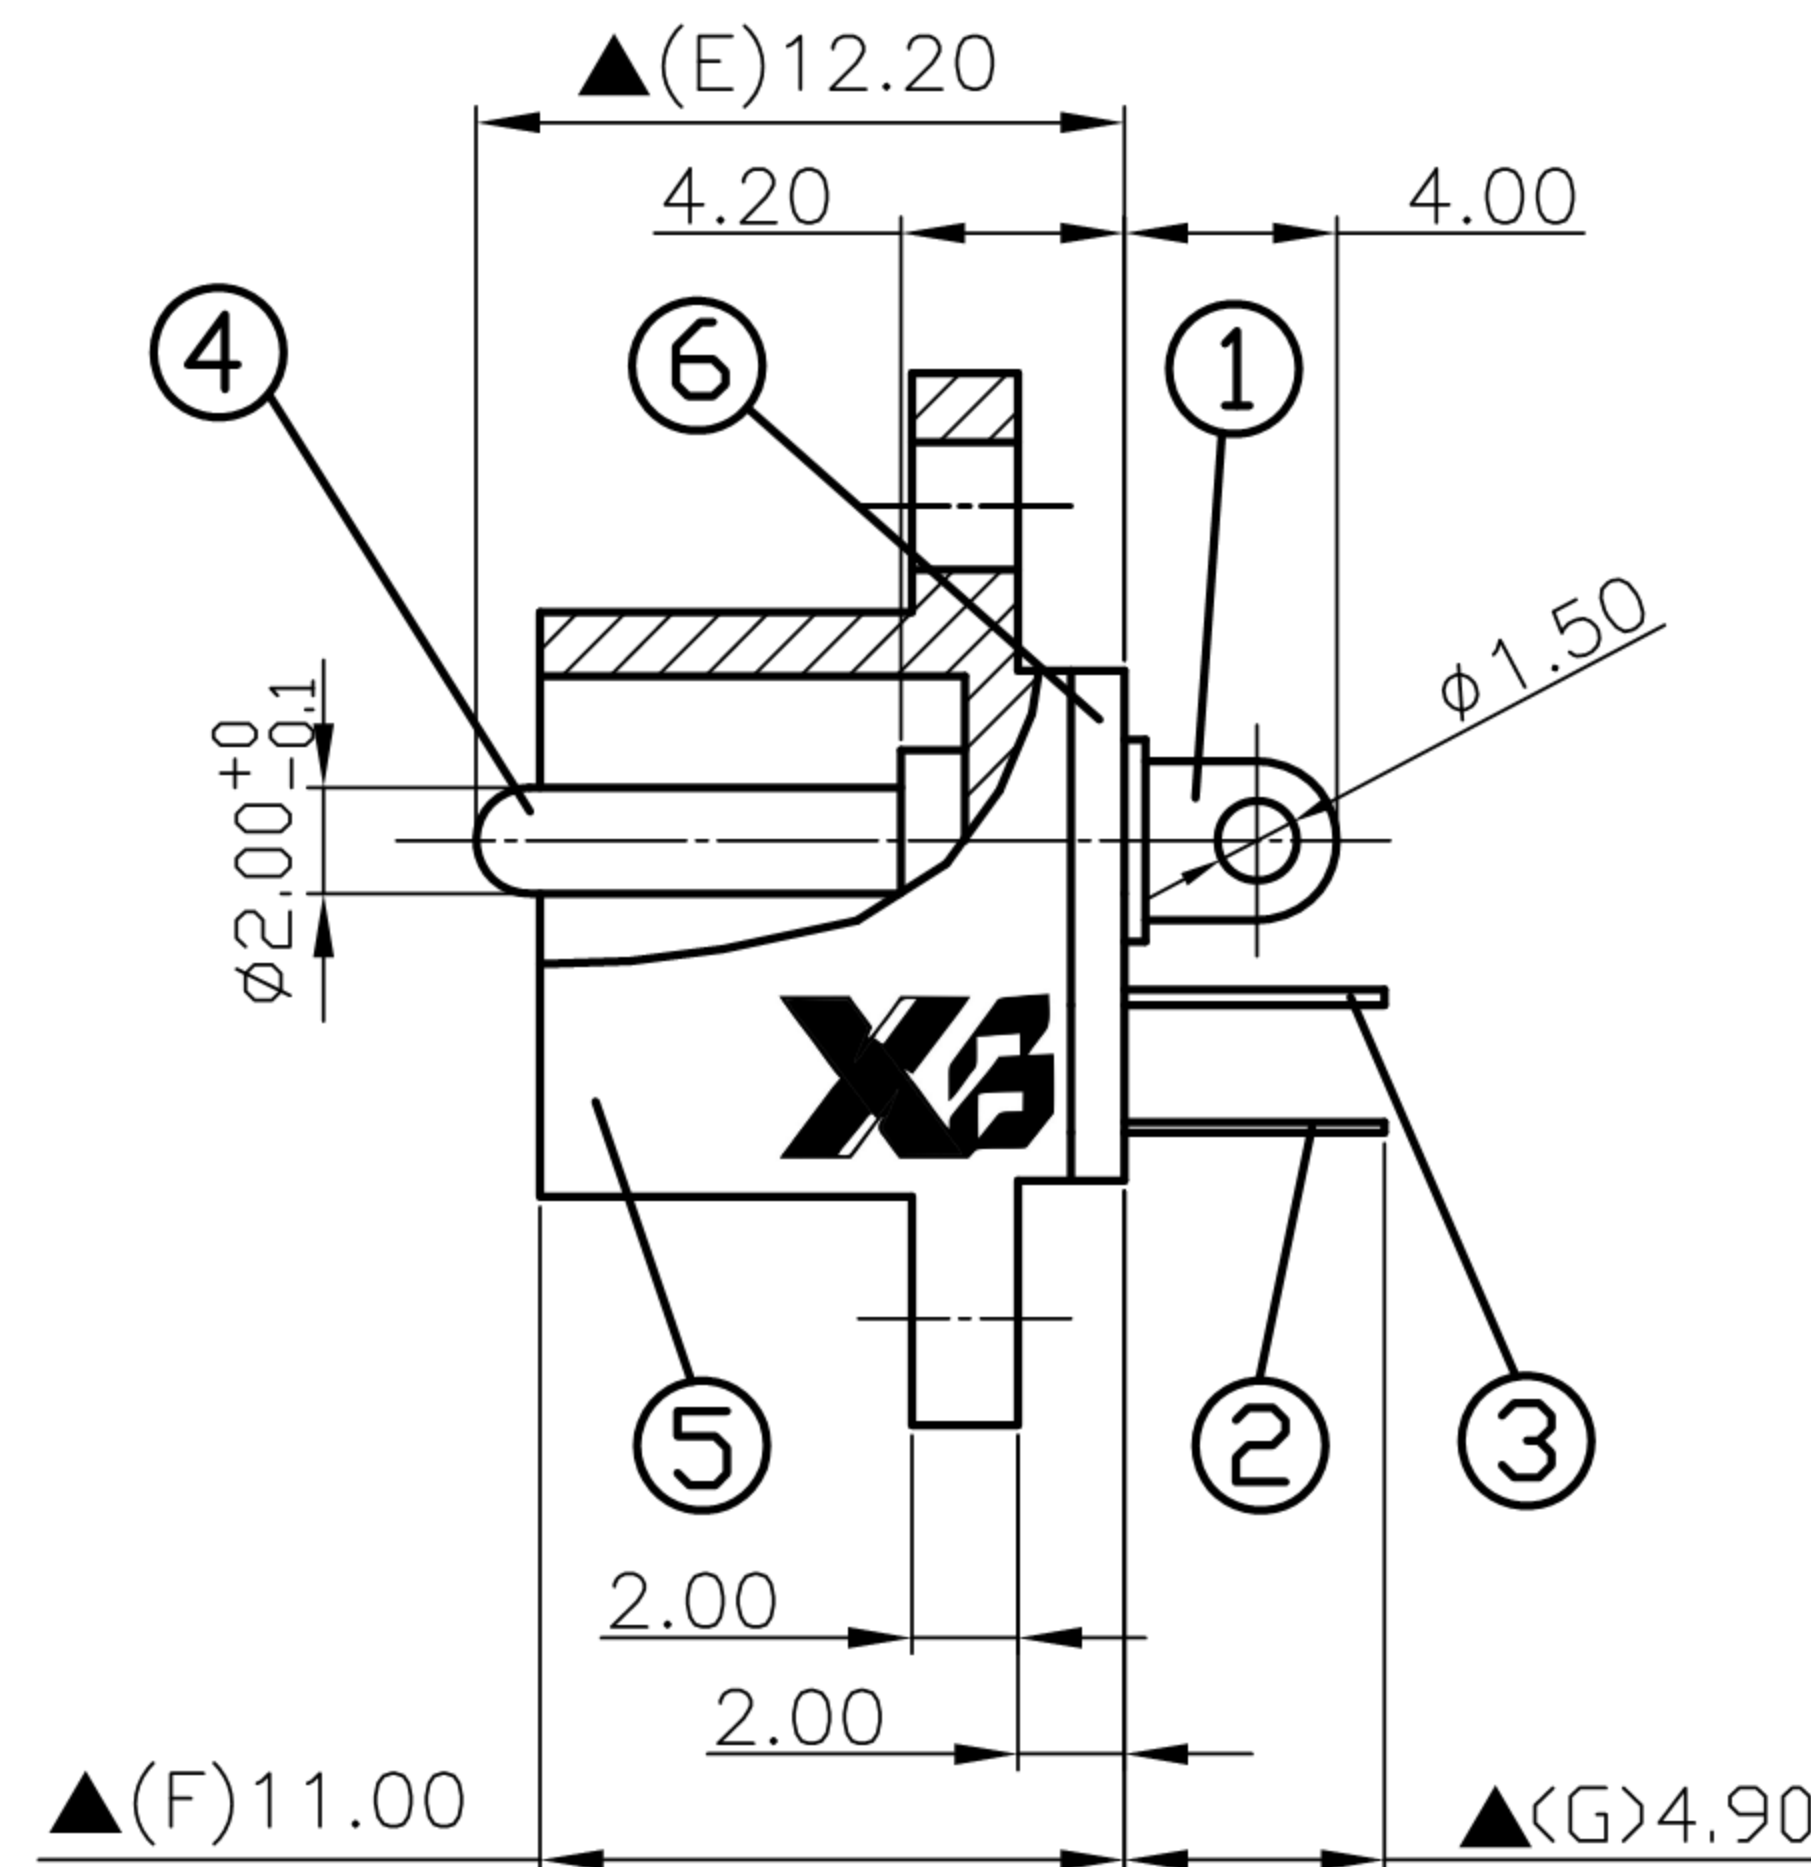


CAD FILE:

ROHS

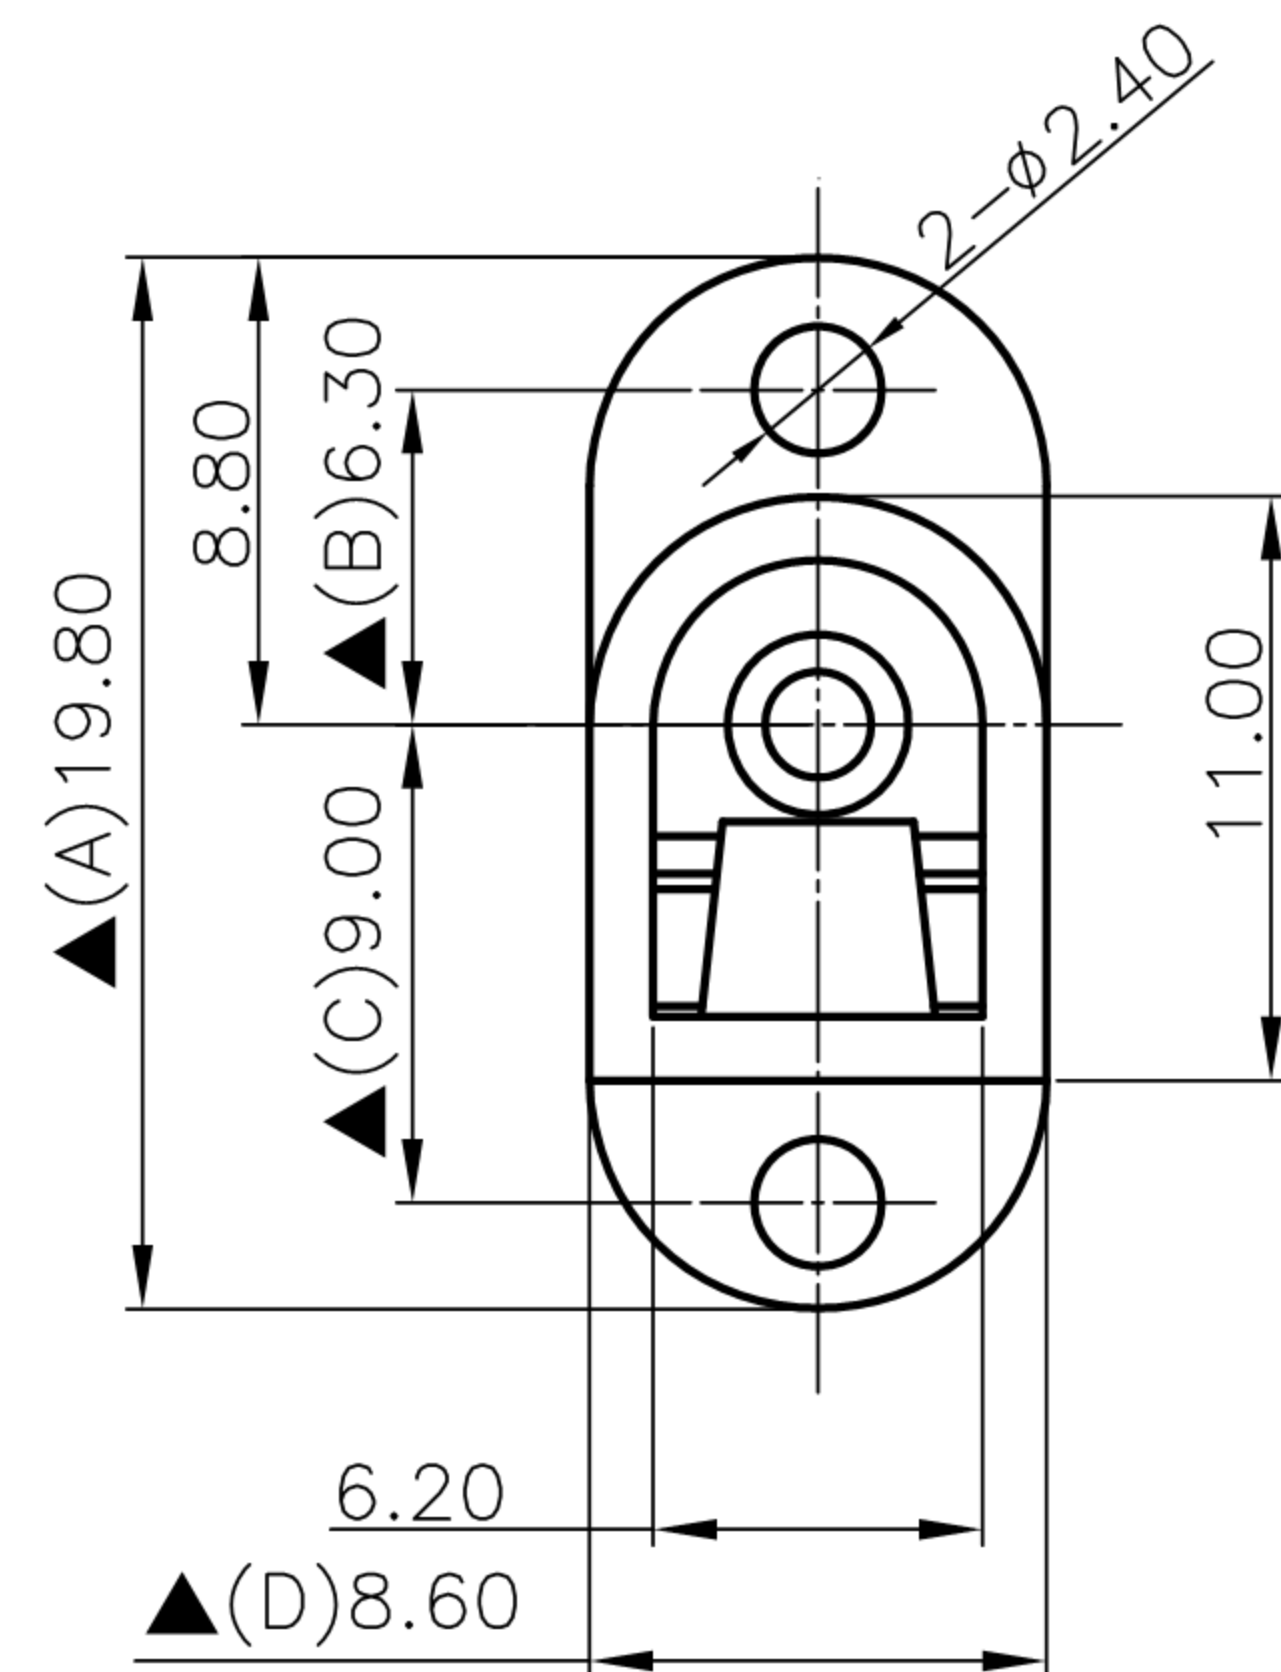

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 1.0A 30A , 16V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

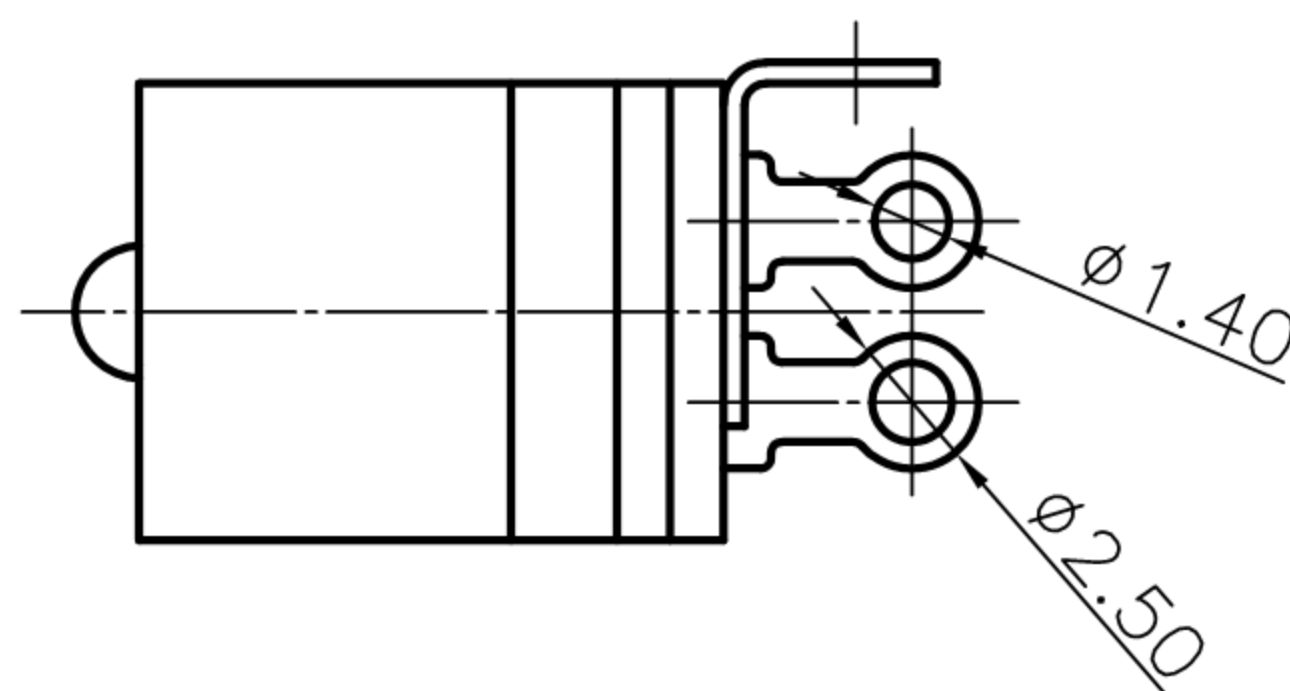

SCHEMATIC	
	MODEL NO C

6.	Insulator	1.0T Bakelite	1	Natural
5.	Housing	PBT+15%	1	Black Color
4.	Pin(2.0φ)	Brass	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q"TY	Finish

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版		ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-0016	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-0016			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				CHK'D	DONG. PANG
1	KNOB	PPA	1	BLACK					APPD.	ZENQ. CHEN
NO.	PARTS	MATERIALS	Q'TY	FINISH						
									2012-9-25	2012-9-25