



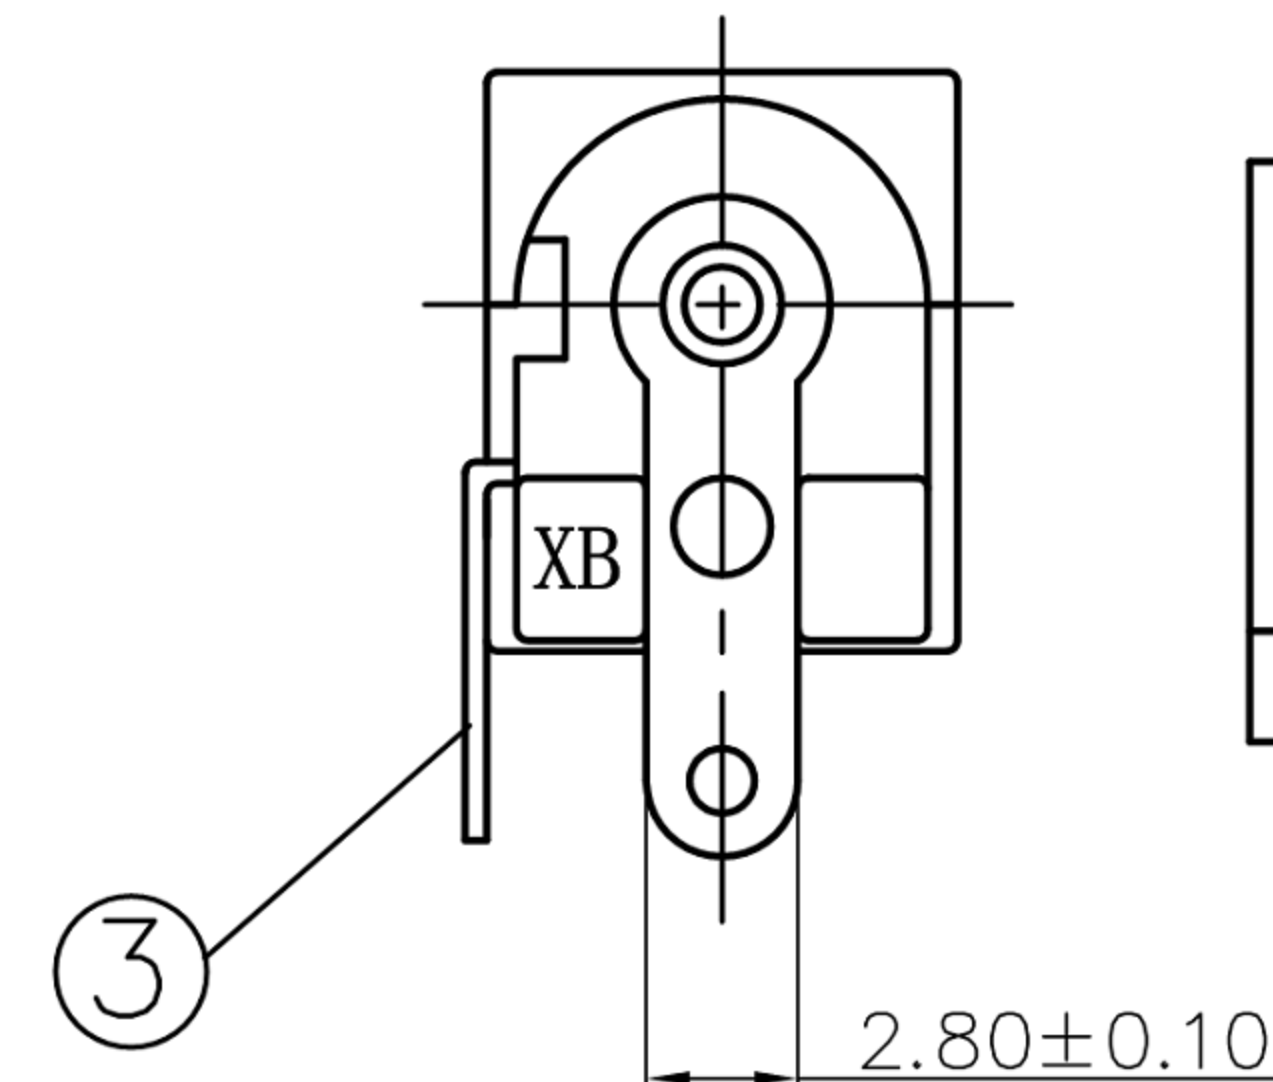


CAD FILE:

ROHS

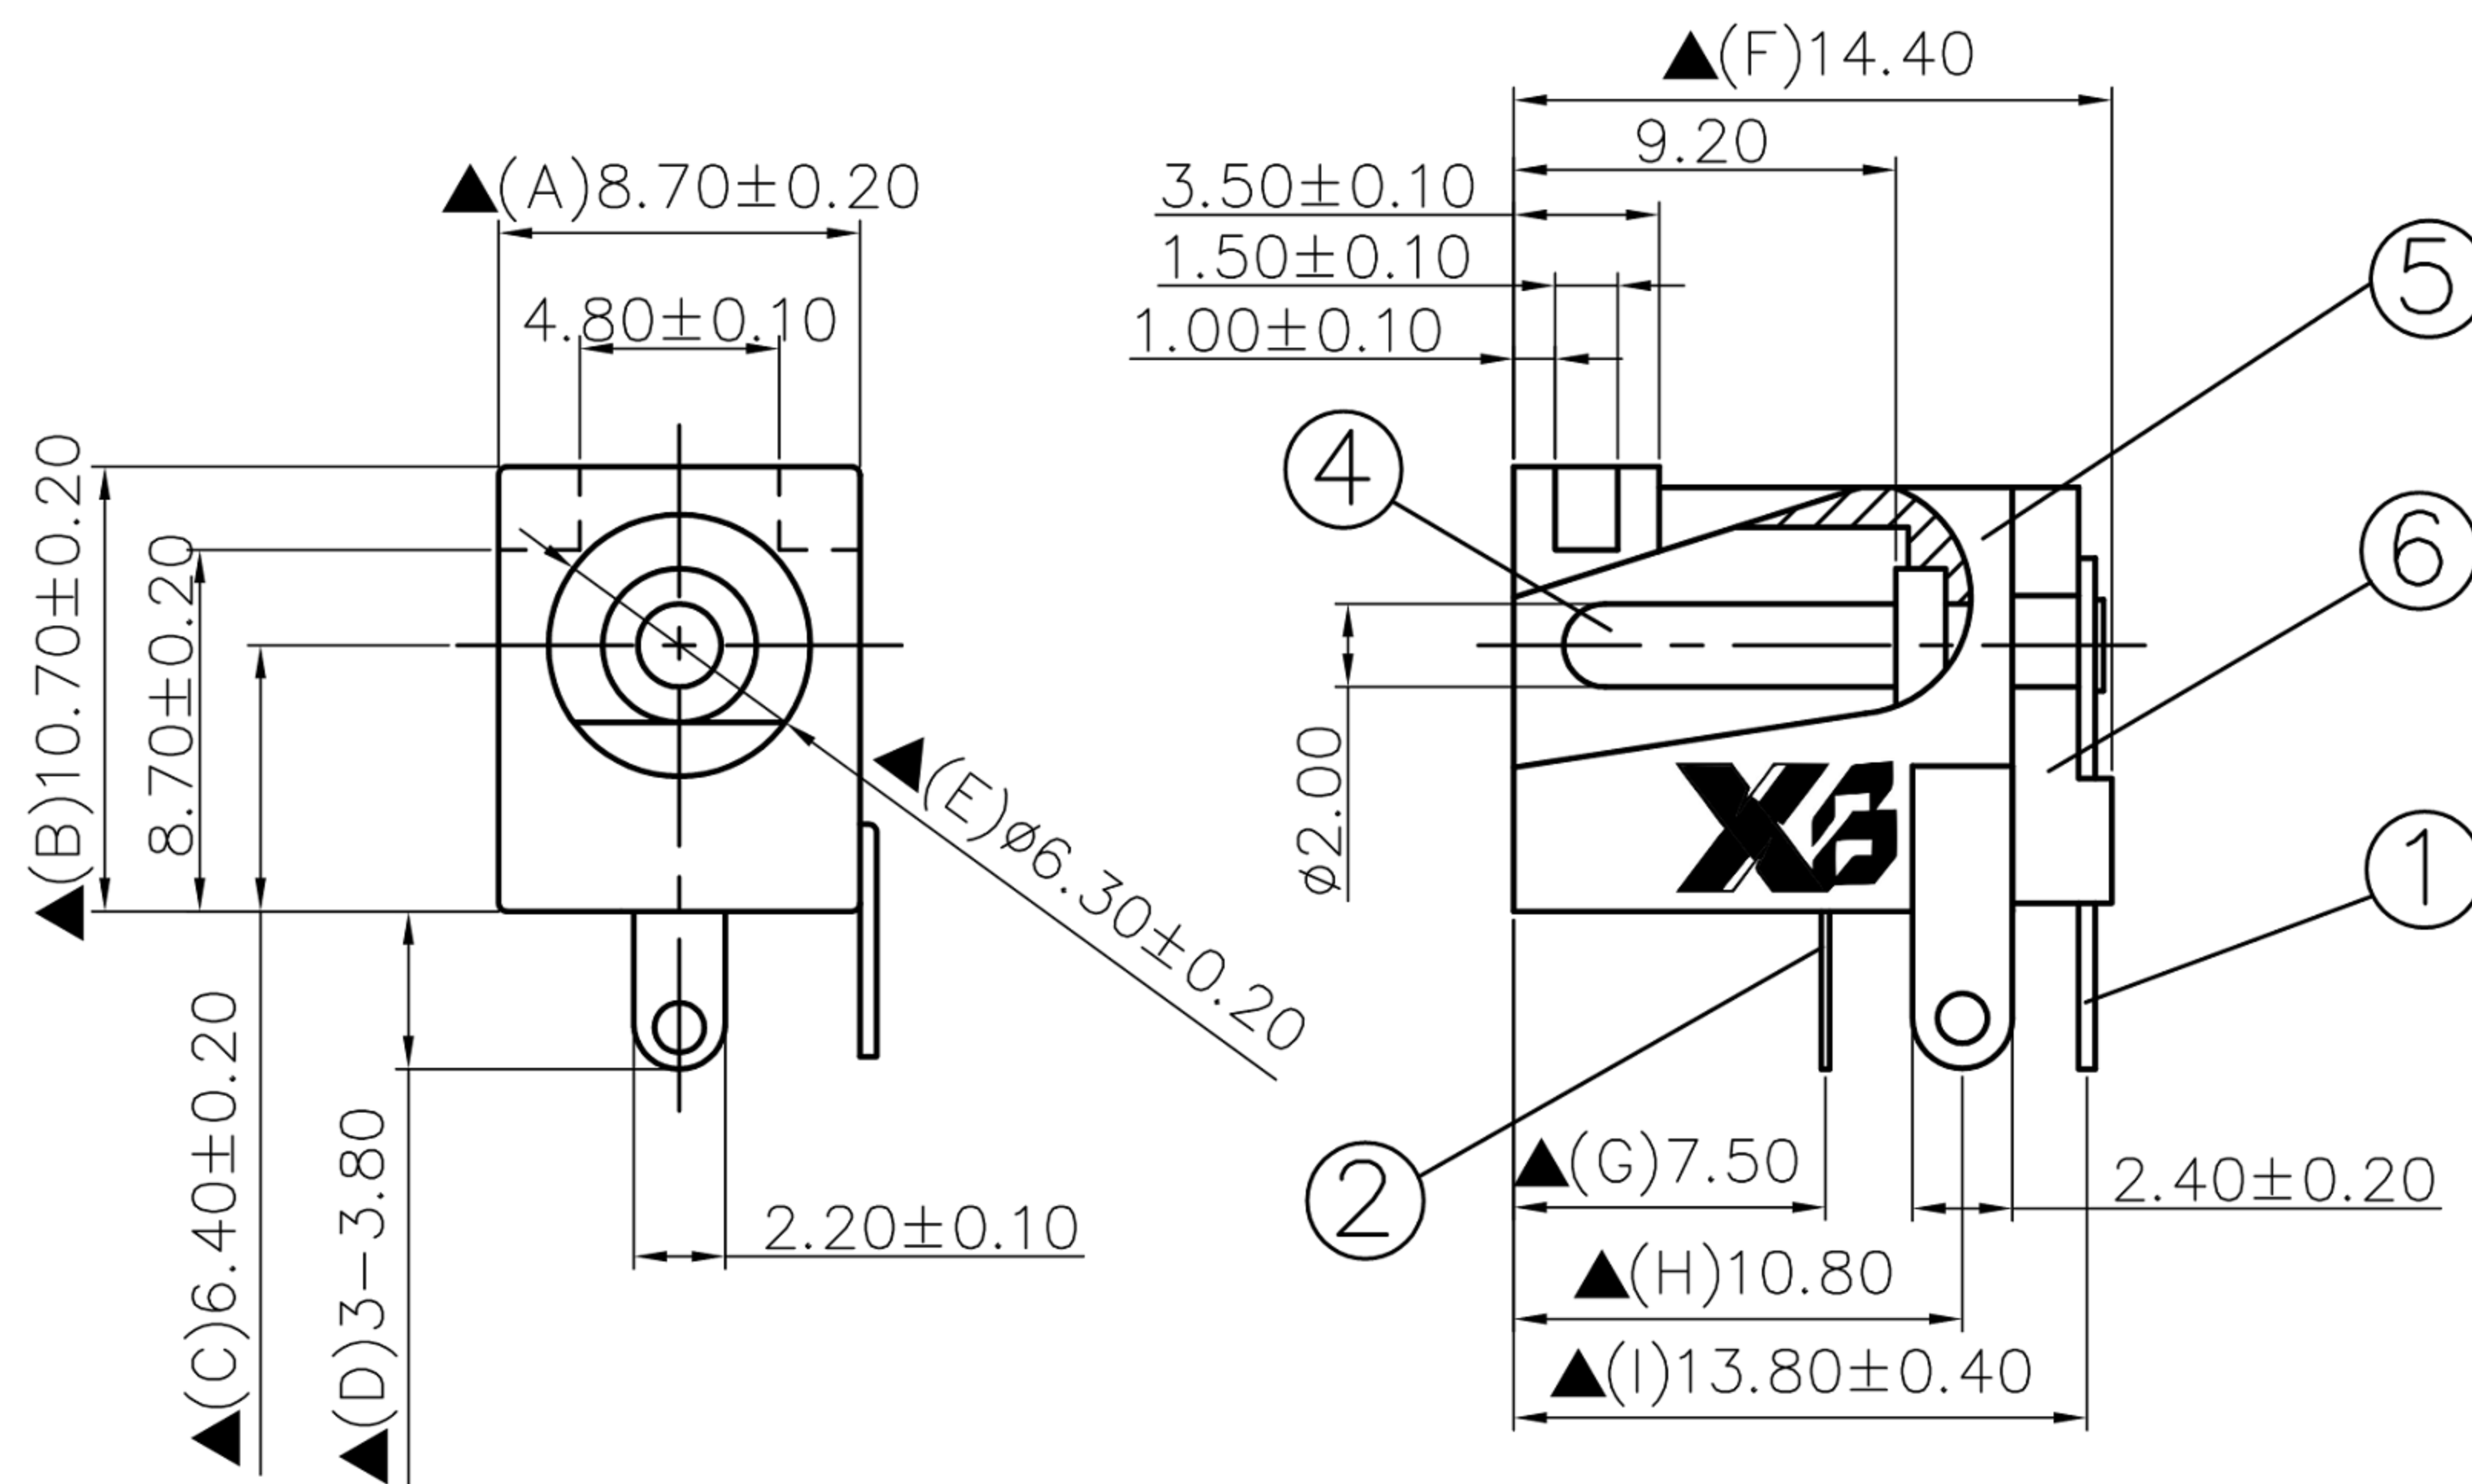

SCHEMATIC	
	1 3 2
MODEL NO	C

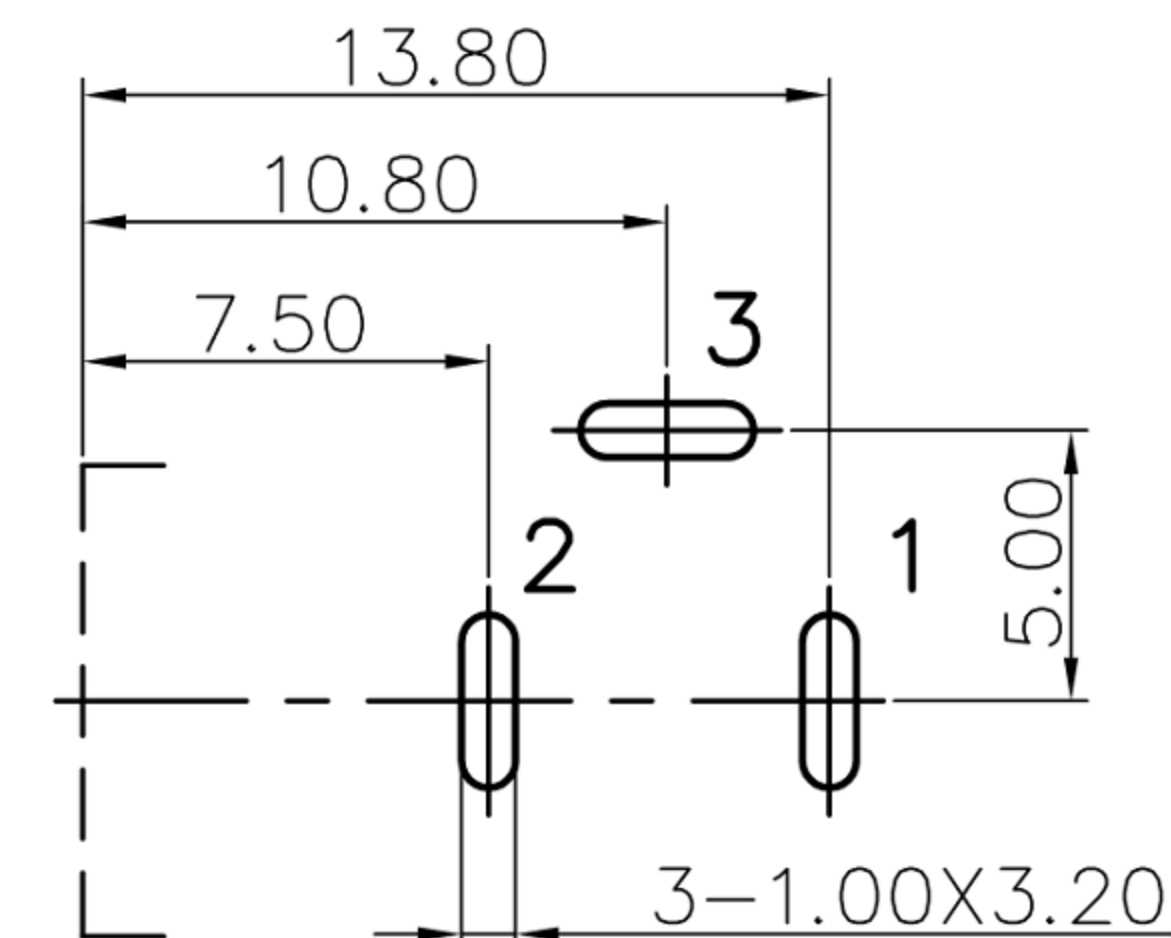Pin Hole Layout
(Jack Bottom View)

6.	Cover	PBT+30% Fibre Glass	1	Black Color
5.	Housing	PBT+30% Fibre Glass	1	Black Color
4.	Pin(2.0 ϕ)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:

Contact Resistance

: $30\text{m}\Omega$ max

Current Rating

: Max 30A 5.0A, 16V DC

Insulation Resistance

: $100\text{M}\Omega$ min. at DC 500V

Dielectric Withstand Voltage : AC 500V for one minute

Remark: ▲: The Most Important Dimension

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-005AX
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-005AX			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					