




CAD FILE:


ROHS

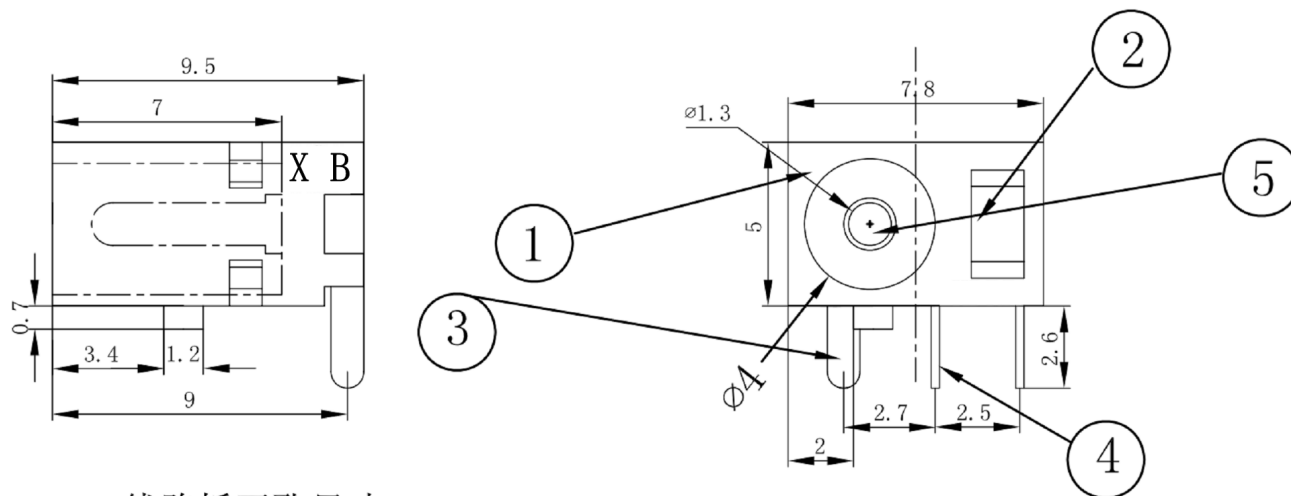

线路板开孔尺寸

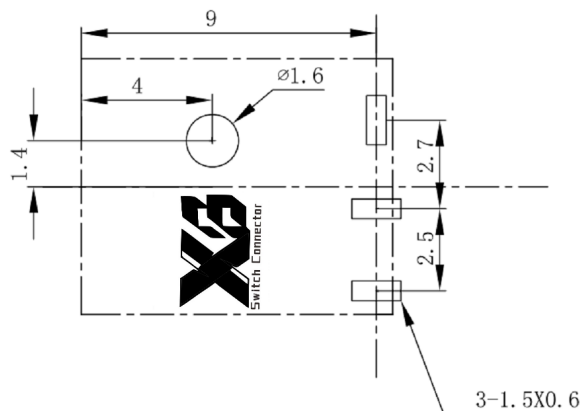

SCHEMATIC	
CENTER PIN	$\phi 1.0 \text{ mm}$ $\phi 1.3 \text{ mm}$

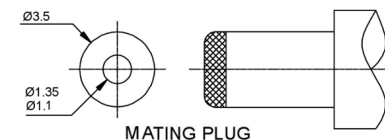

SPECIFICATION

1. Rating : DC 12V 30V, 1.0A 3.0A
2. Contact resistance : $\leq 30 \text{ m}\Omega$
3. Insulation resistance : $\geq 100 \text{ M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. Life test : 5,000 cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1 \text{ mm}$	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2 \text{ mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack		UNIT : mm	DRWG NO.: XB-DC-0060B	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-0060B		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN
NO.	PARTS	MATERIALS	Q'TY	FINISH	东 莞 市 溪 榜 电 子 有 限 公 司		2012-9-25		
					DONG GUAN XI BANG ELECTRONICS CO., LTD.		2012-9-25		