

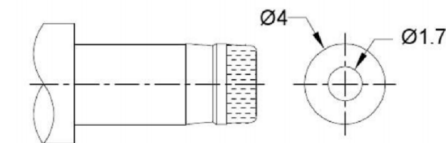
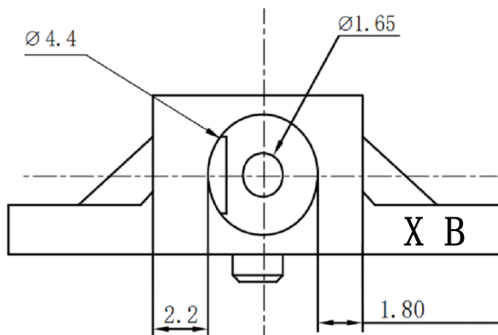
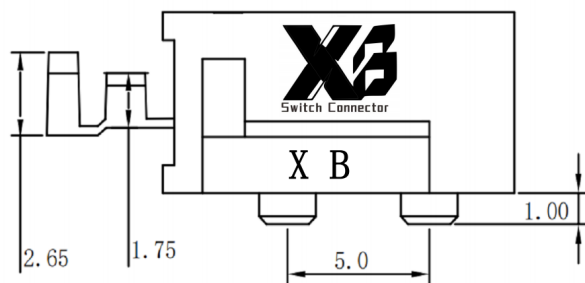



CAD FILE:

ROHS

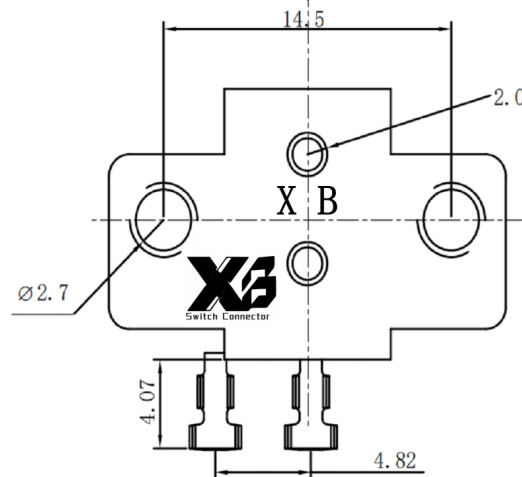

MATING PLUG
Jack Insertion Depth: 8.0mm

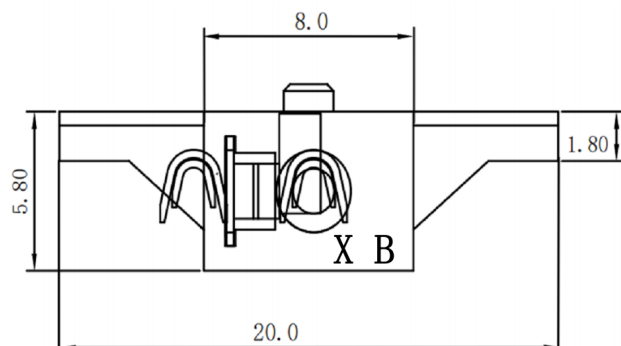

SCHEMATIC	
CENTER PIN	ø1.65mm

SPECIFICATION

- 1.Rating : DC 12V 30V, 1.0A 3.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-1181X		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-1181X			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D		DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK				APPD.		ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	Switch Connector	DONG GUAN XI BANG ELECTRONI CS CO., LTD.					