
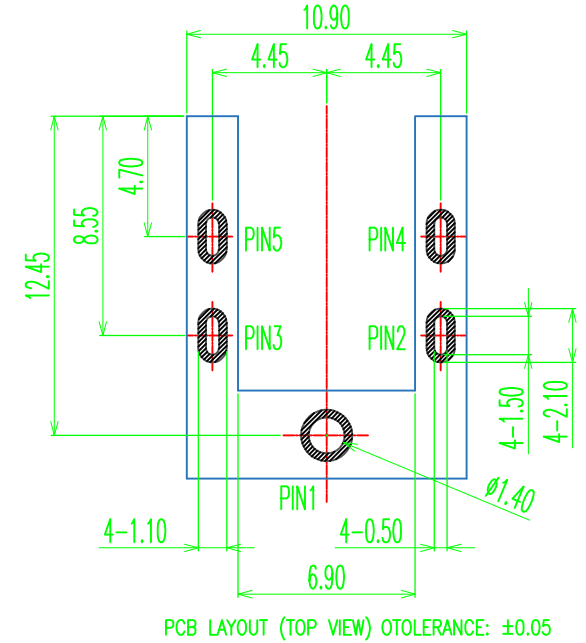
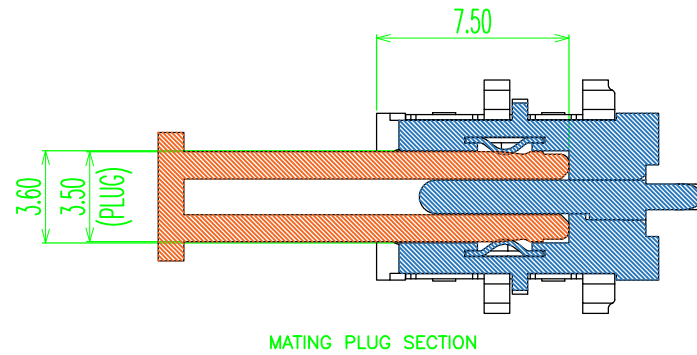
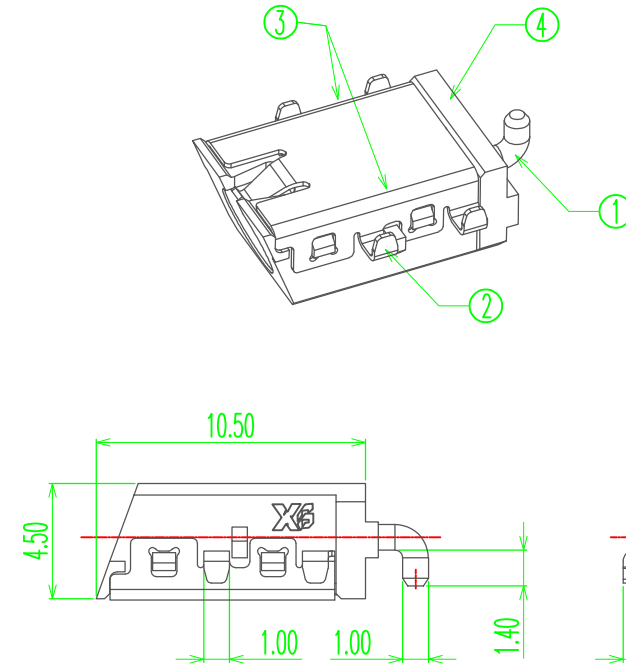


NOTES

1. CURRENT RATING: 3A AC/DC MAX.
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~30N.
7. CONNECTOR UNMATING FORCES: 3~30N.
8. OPERATING TEMPERATURE: -25°C TO +85°C.

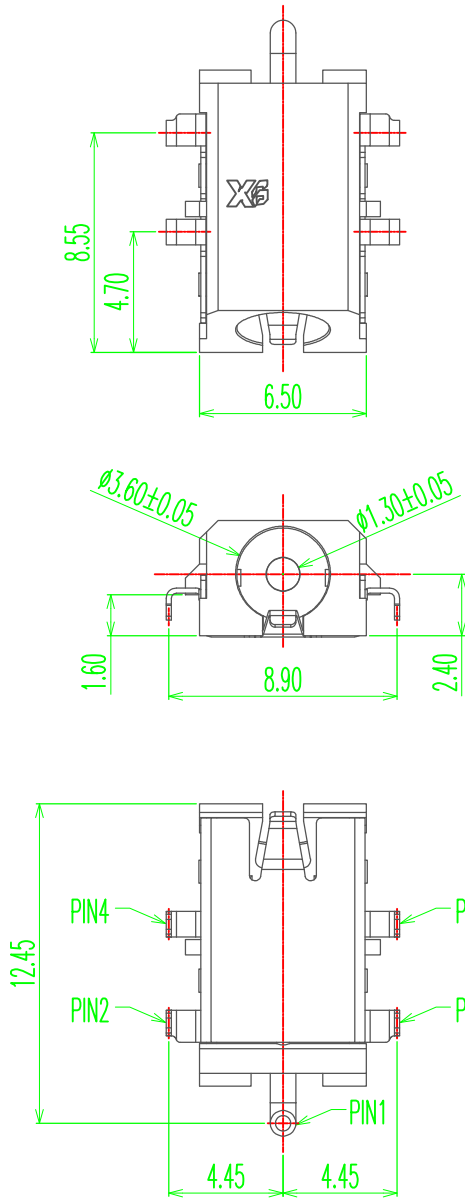

④	HOUSING	1	HIGH TEMPERATURE PLASTICS; BLACK
③	TERMINAL	2	PHOSPHOR BRONZE; NICKEL PLATING
②	SHELL	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE
①	CENTER PIN	1	BRASS; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE
ITEM	NAME	Q'TY	DESCRIPTION

UNLESS OTHERWISE
SPECIFIED TOLERANCES东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony 2023.5.17	PART NAME: DC POWER JACK	
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-DC-350135-1407-20000H	
X.	±0.50	X.	±2°				
X.X	±0.30	X.X	±1°				
X.XX	±0.20	X.XX	—	APPROVED	Andy 2023.5.17	SHEET: 1/1 REV.: A1	
X.XXX	±0.10	X.XXX	—		DRAWING NO		
				UNIT: mm			
3RD ANGLE PROJECTION							

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------