
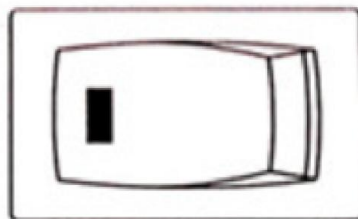
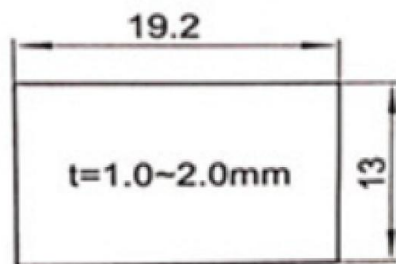
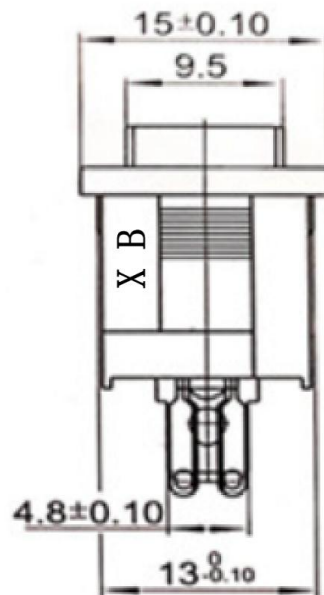


CAD FILE:

ROHS

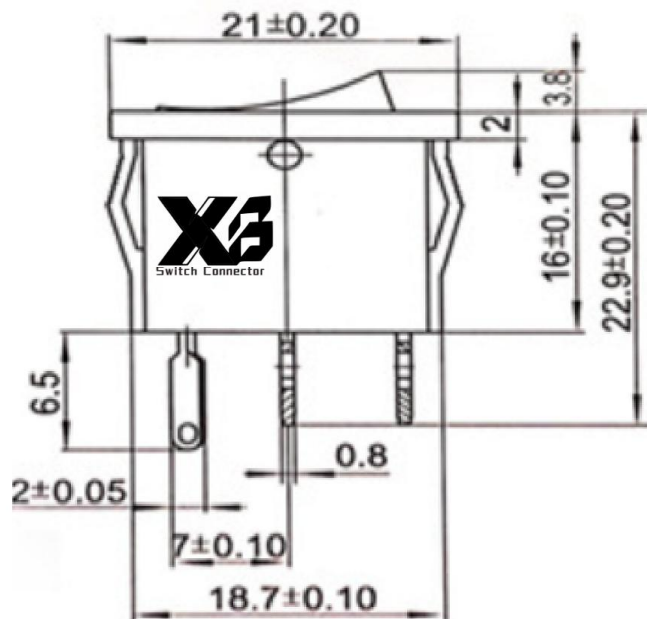

产品参数: XB-KCD1-B2-LED
额定电流、电压: 6A 250VAC/10A 125VAC T85
10A 250VACT85
10A 250VAC 1/2HP 250VAC
15A 125VAC 1/3HP 125VAC
接 触 电 阻: $\leq 50m\Omega$
绝 缘 电 阻: $\geq 100M\Omega$
介 电 强 度: $\geq 1500VAC/1min$

SWITCHING CIRCUIT



8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1mm$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2mm$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Rotary Switch			UNIT : mm	DRWG NO.: XB-KCD1-B2-LED
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-KCD1-B2-LED			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					