
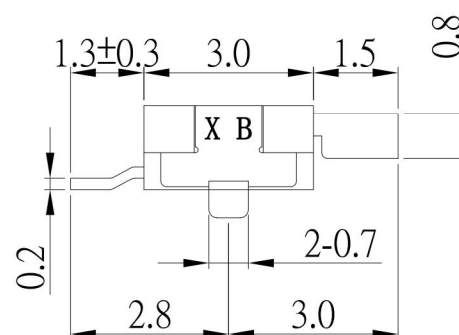
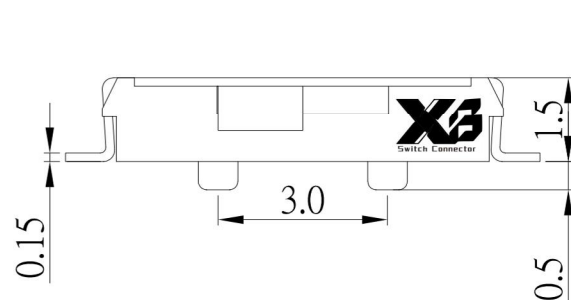
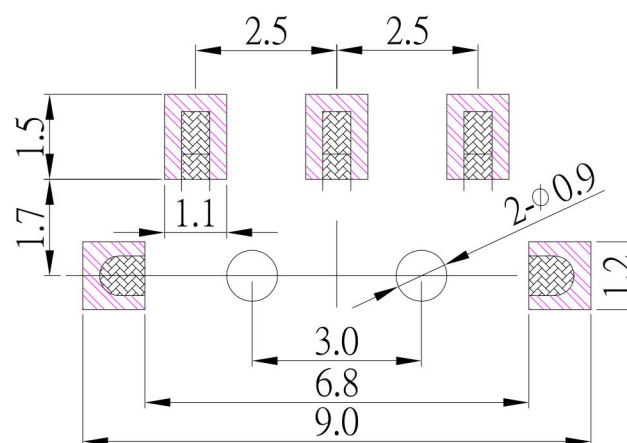


CIRCUIT DIAGRAM

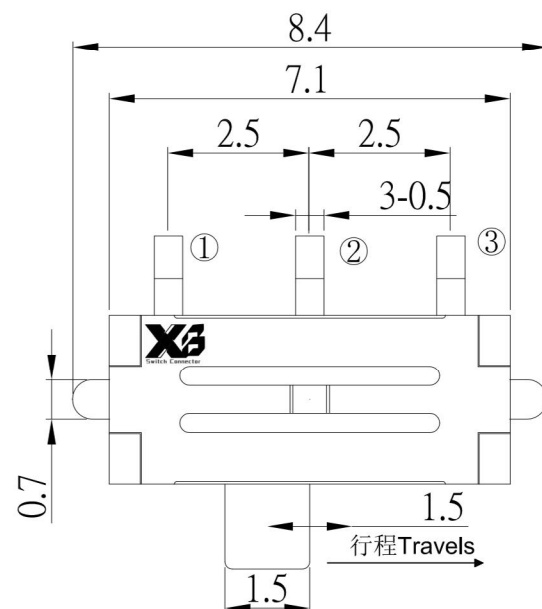

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	DC 12V 0.1A
Contact Resistance	100mΩ Max
Insulation Resistance	100MΩ Min
Operating Force	160 ±50gf
Life	10,000 cycles
Operation temperature range	-40°C~85°C

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/10/21
DATE: 12/10/21
DATE: 12/10/21

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: SLIDE SWITCH
DWG NO. SS-B00-S246
PART NO. SS-B00-S246

SIZE: A4
VER: R5

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	新增Operation temperature range	Jack	121021
4	更新材質	Jack	091720
3	更新SLIDER的顏色	Jack	091620
2	更新圖面	Jack	060917
1	新增尺寸	Jack	052715