


P.C.B LAYOUT MOUNTING PATTERN

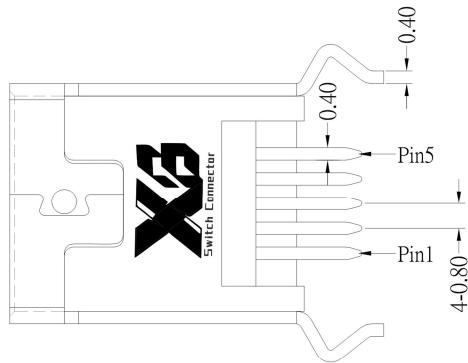

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 milliohms Max
- 4.Dielectric Withstanding Voltage: 300 V AC AT Sec Level
- 5.Insulation Resistance: 100 MEGA ohms Min

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.0 kgf (Max)
Unmate force: 0.7 kgf (Min)
- 2.Terminal Retention: 0.5 kgf (Min)

Material:

- 1.Housing: High Temperature Thermal Plastics, UL 94V-0 , LCP , Black
- 2.Contact: PHOSPHOR BRONZE
- 3.Shell: BRASS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 01/20/14
DATE: 01/20/14
DATE: 01/20/14

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MINI USB 5B 180度插板
SCALE	1 : 1	DWG NO.	MUSB-5B-63015D-S175
SHEET NO.	1 of 1	PART NO.	MUSB-5B-63015D-S175

SIZE: A4
VER: R2