

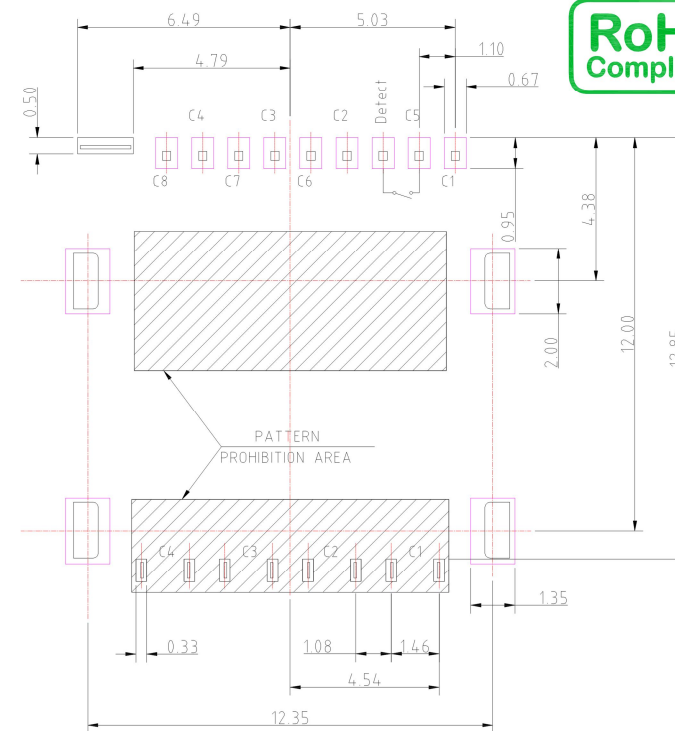



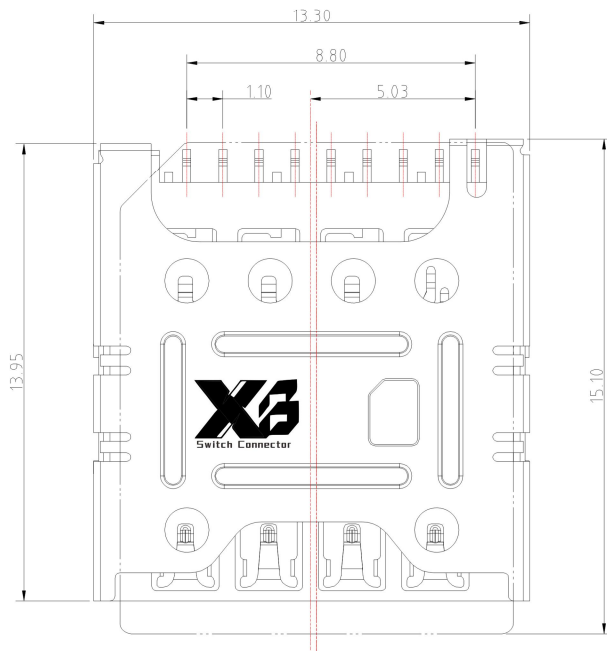

PCB LAYOYT

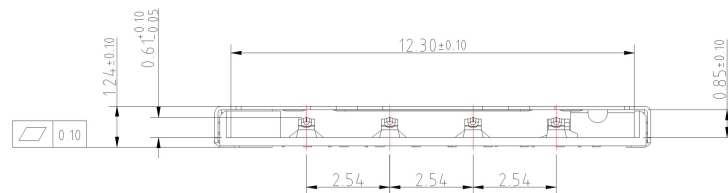

C5		Insert Card
C5		Withdrawal Card(Normal)

Pin Assignments

PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved

SPECIFICATION

Electrical :

- 1.Current Rating: 1.0A
- 2.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1000 MΩ Min.

Environmental:

- 1.Operating Temperature: -25℃ ~ +85℃.

Material:

- 1.Housing: LCP
- 2.Contact: Copper Alloy
- 3.Shell: Stainless Steel

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/17/18
DATE: 09/17/18
DATE: 09/17/18

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE: CONNECTOR
MODLE: MICRO SIM H1.24
DWG NO. MSIM-0124-S267
PART NO. MSIM-0124-S267

SIZE: A4
VER: R