
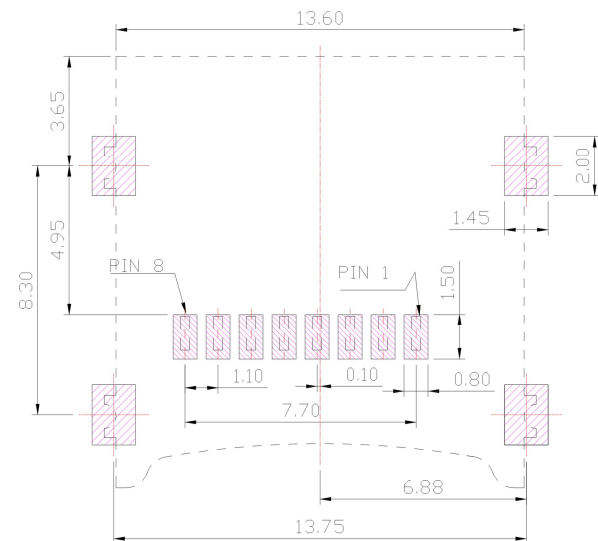
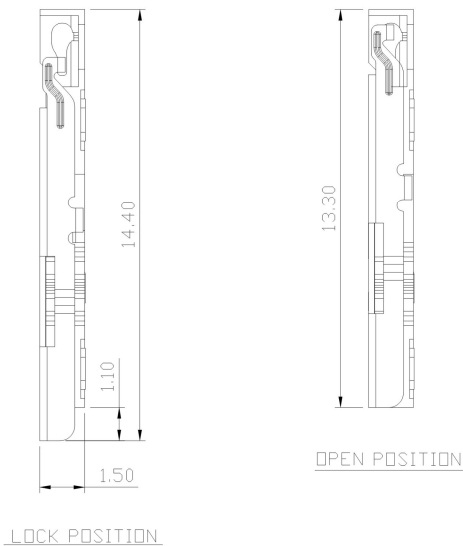


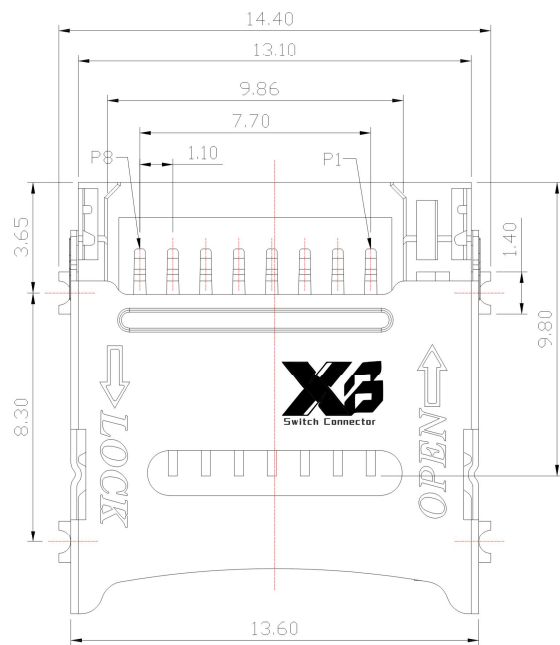

## PCB LAYOYT

### SPECIFICATION

#### Electrical :



- 1.Current Rating: 1.0A
- 2.Voltage Rating: 30V
- 3.Contact Resistance: 50 m $\Omega$  Max.
- 4.Insulation Resistance: 100 M $\Omega$  Min.
- 5.Dielectric Withstanding Voltage: 100V AC

#### Environmental:

- 1.Operating Temperature: -30°C ~ +80°C.

#### Material:

- 1.Housing: LCP,UL 94V-0,Black
- 2.Contact: Phosphor Bronze,Gold / Tin Plated over Nickel
- 3.Stator: Phosphor Bronze,Tin Plated
- 4.Shell: Stainless Steel,Nickel Plated

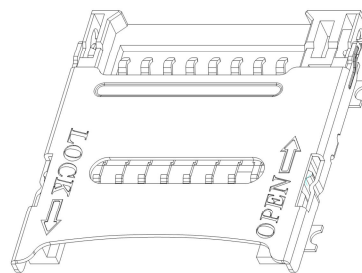

东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5  $\pm 0.2$   
Above 5 ~ 15  $\pm 0.3$   
Above 15 ~ 30  $\pm 0.4$   
Above 30 ~ 50  $\pm 0.5$   
Angle  $\pm 0.3^\circ$

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao  
DATE: 11/04/22  
DATE: 11/04/22  
DATE: 11/04/22

| MAT'L     | TITLE    | CONNECTOR                 |
|-----------|----------|---------------------------|
| FINISH    | MODLE    | MICRO SD Card 掀盖式 H:1.5mm |
| SCALE     | DWG NO.  | SD-TF6158S-S267           |
| SHEET NO. | PART NO. | SD-TF6158S-S267           |

| ITEM NO. | DESCRIPTION | DRAWN | DATE   |
|----------|-------------|-------|--------|
| 4        | 更新3d樣式      | Jack  | 110422 |
| 3        | 新增鍍層        | Jack  | 080322 |
| 2        | 更新料號        | Jack  | 112421 |
| 1        | 更新為A0版      | Jack  | 013018 |