

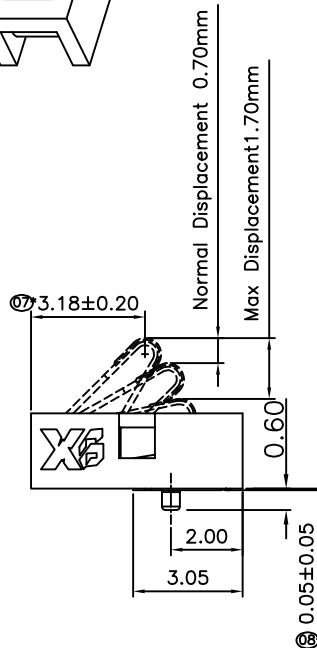
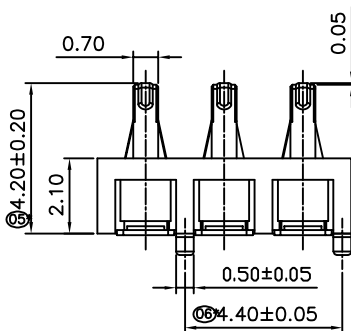



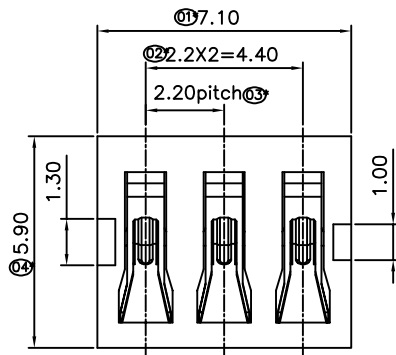

NOTES

1. MATERIAL & FLASH/PLATED

1.1 HOUSING: HIGH TEMP. THERMOPLASTIC+GLASS FIBRE

[UL 94V-0]; COLOR: BLACK

1.2 TERMINAL: COPPER ALLOY


PLATED: GOLD PLATED

BASE NICKEL: 50~100u"


1.3 COVER: HIGH TEMP. THERMOPLASTIC+GLASS FIBRE

[UL 94V-0]; COLOR: BLACK

2.PACKAGE: TAPE/REEL

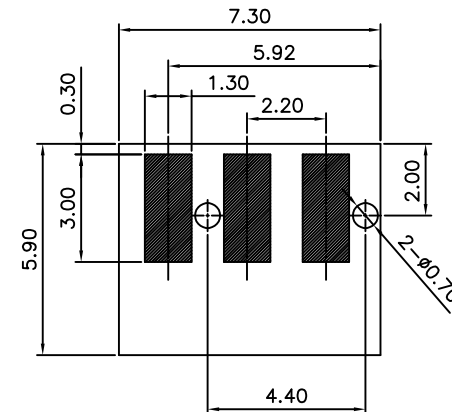

RECOMMENDED PC BOARD LAYOUT
TOLERANCE: ± 0.05 [TOP VIEW]






版本REV	更新版标记	REVISION	NO	DATE	未注公差 TOLERANCE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
					X. ± 0.35		
					X.X ± 0.25		
					X.XX ± 0.15		
绘制DRAWN		PENG. GAO			X.XXX ± 0.05	品名ARTICLE: 电池座连接器	
设计DES' D		PAN. HE			视图方法 PROJECTION		
审核CHK' D		JIE. HAI. LAI				图号MODEL: XB-BC-3P2022 A4	
批准APPV' D		FEI. LONG. HE			比例SCALE: 3: 1		
					单位UNIT: mm	页码SHEET: 共2页 第1页	

備注:


1. 材質與電鍍規格

序號	品名	料號	材質	電鍍規格	用量
1		11004201	PA9T UL94V-0		1
2		210042X3	C5210R-SH		3
3		13004400	PA9T UL94V-0		1

2. 包裝方式: TAPE REL

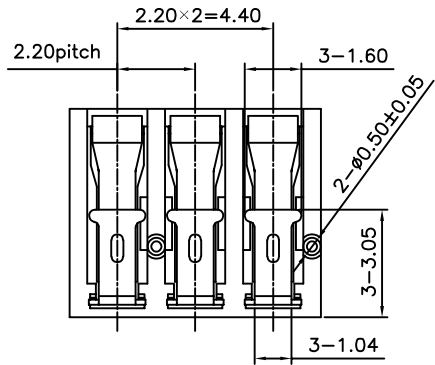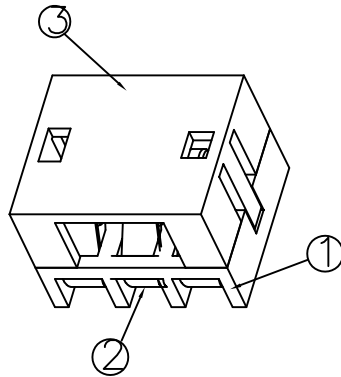

第二步:
蓋子提起



第一步:
推向一側

版本REV			更改标记REVISION		NO		FEI		DATE		未注公差 TOLERANCE		XBB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.									
											X. ±0.35											
											X.X ±0.25											
											X.XX ±0.15											
绘制DRAWN							PENG. GAO						X.XXX ±0.05		品名ARTICLE: 电池座连接器							
设计DES' D							PAN. HE						视图方法 PROJECTION									
审核CHK' D							JIE. HAI. LAI						图号MODEL:				XB-BC-3P2022				A4	
批准APPV' D							FEI. LONG. HE		比例SCALE: 3: 1				单位UNIT: mm				页码SHEET: 共2页 第2页					