

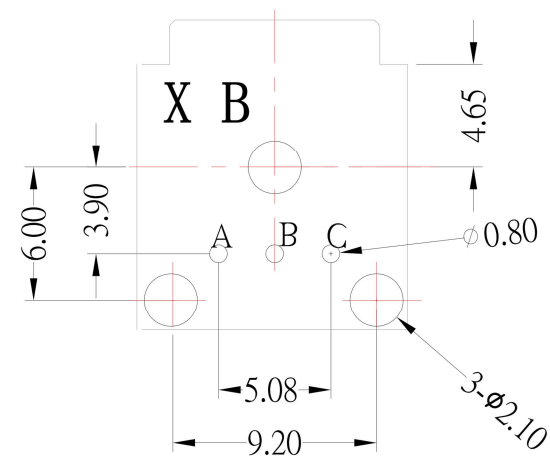
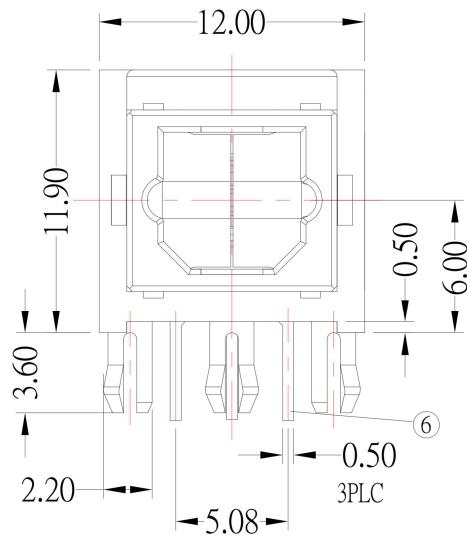
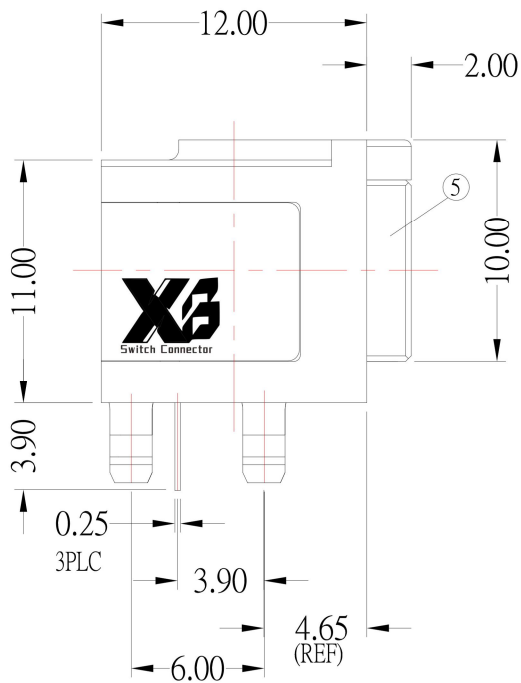



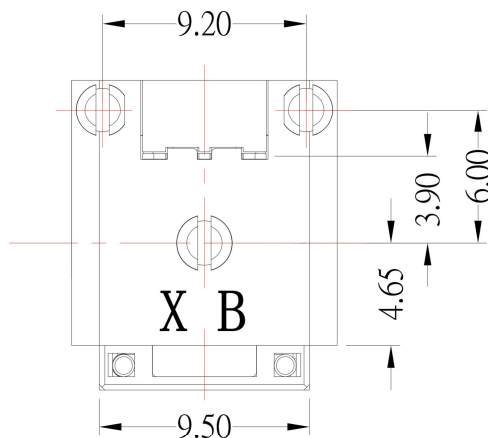

PCB LAYOUT
TOP VIEW

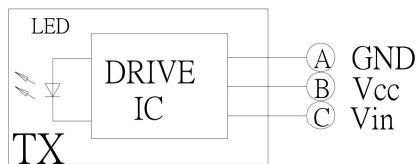

SPECIFICATIONS:

- 1.DISSIPATION CURRENT: 5.0 mA.
- 2.OPERATING VOLTAGE(Vcc): 2.7-5.5 V.
- 3.INSERTION FORCE:4.0Max Kgs
- 4.EXTRACTION FORCE:0.6Kgs TO 4.0 Kgs
- 5.ENDURANCE:500 CYCLEs
- 6.OPERATING TEMPERATURE: -25 TO +70 °C.

⑥	TX UNIT	25M		1
⑤	COIL SPRING	SUS		2
④	GATE	PA9T	GREEN COLOR	2
③	FRAME	PA9T	BLACK COLOR	1
②	COVER	PA9T	BLACK COLOR	1
①	HOUSING	PA9T	BLACK COLOR	1
ITEM	DESCRTPTION	MATERIAL	PLATING&COLOR	Q'TY



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/22/19			
CHECKED BY:	DATE	FINISH	MODLE	OPTICAL JACK(發射端)
Jacky Chen	11/22/19			
APPROVED BY:	DATE	SCALE	DWG NO.	OJ-418-TX2-S214
Tony Kao	11/22/19	1 : 1		
		SHEET NO.	PART NO.	OJ-418-TX2-S214
		1 of 1		
				SIZE A4
				VER R1