

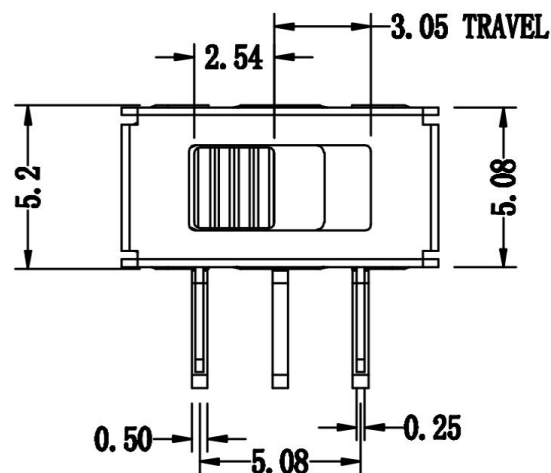
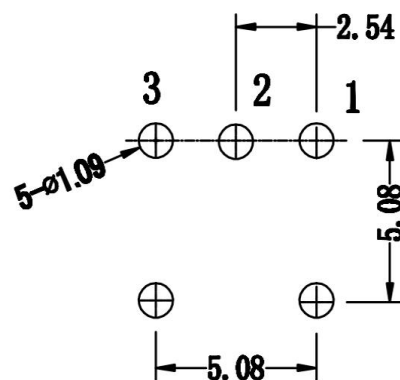
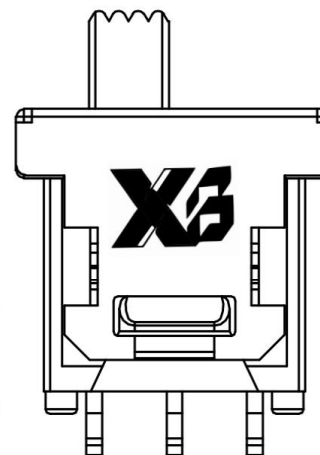


CAD FILE:


ROHS

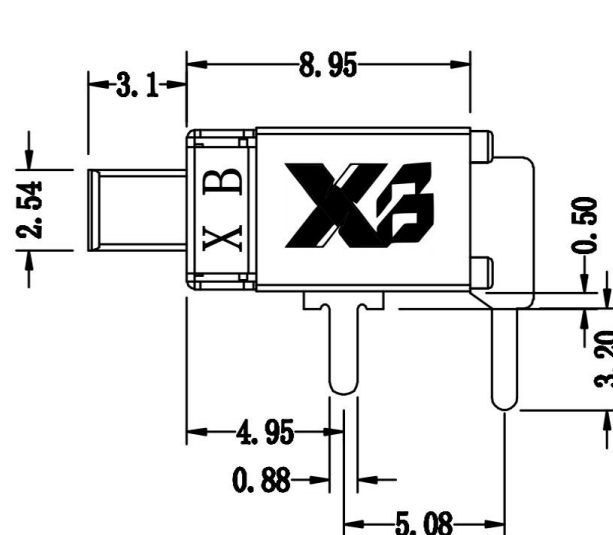

ACTUATOR IN POS. 1

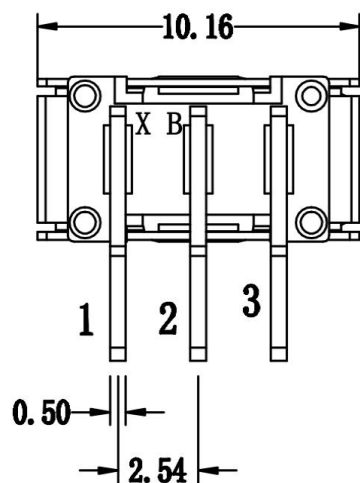

PC MOUNTING

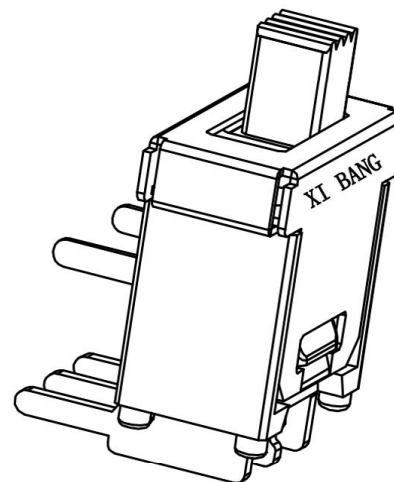

Model NO.	SWITCH FUNCTION		
	POS. 1	POS. 2	POS. 3
SS1-102	ON	NONE	ON
CONN. TERMINALS	2-3	N/A	2-1
SCHEMATIC			
SPDT			

Specifications

CONTACT RATING: 0.4 VA max. @ 20 V AC or DC max.
MECHANICAL & ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 20 m Ω max. initial @ 2-4 V DC, 100 mA.
INSULATION RESISTANCE: 1000 M Ω min.
DIELECTRIC STRENGTH: 500 Vrms min.
OPERATING TEMPERATURE: -30°C to 85°C.

Materials

BASE: PPA (UL 94V-0).
HOUSING: Stainless steel with tin plate.
CONTACT/TERMINALS: Copper alloy silver plated.
TERMINAL SEAL: Epoxy.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE High current Slide Switch			UNIT : mm	DRWG NO.: XB-SS1-0-102-A03X
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-SS1-0-102-A03X			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.				