

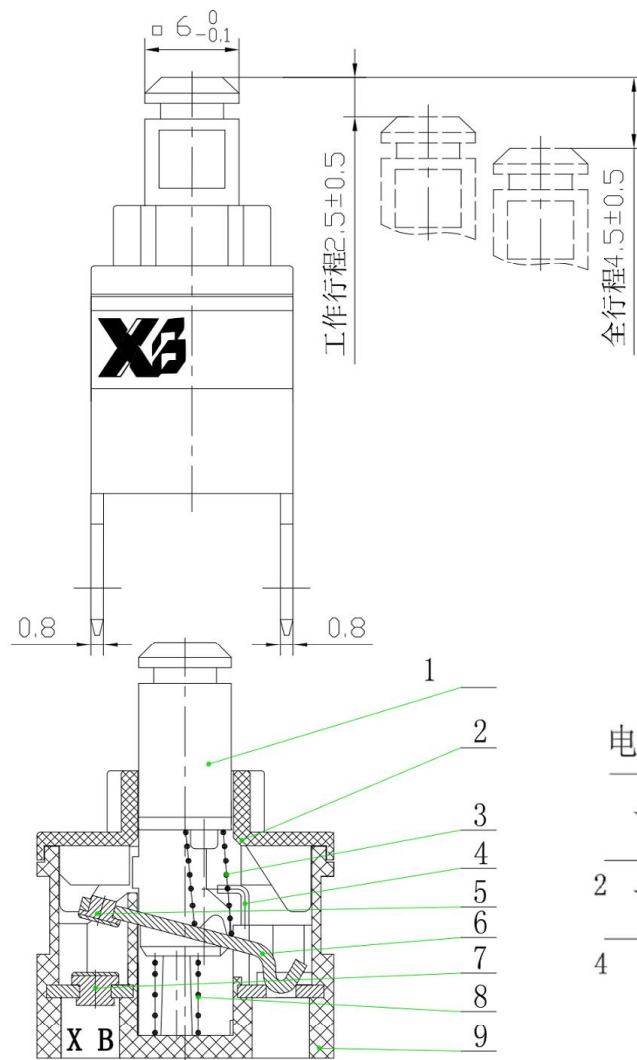


CAD FILE:

ROHS

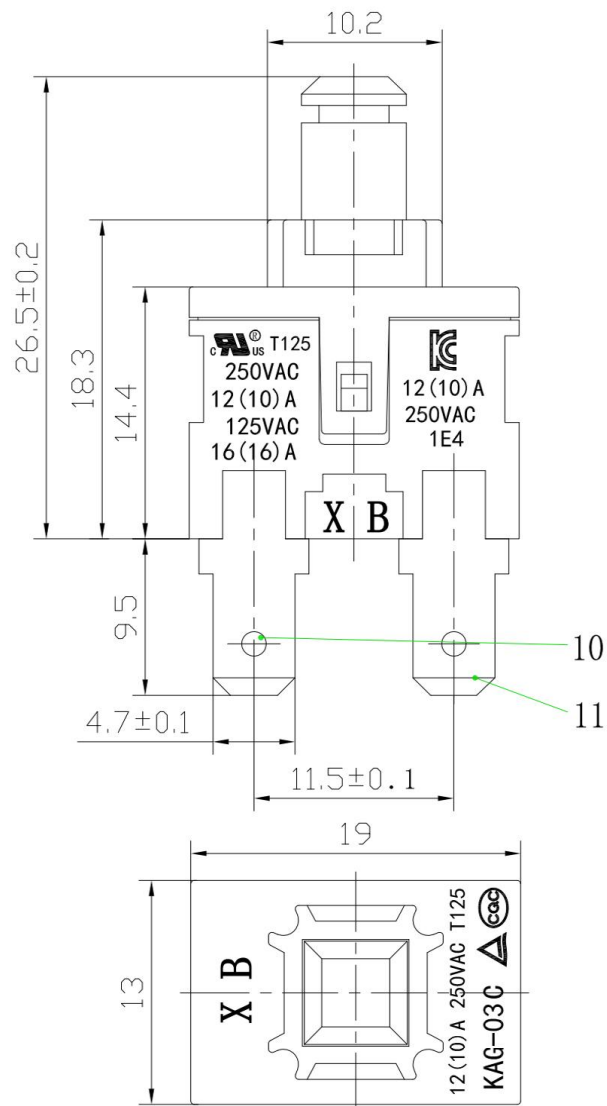

电原理图



按钮开关技术参数

额定电流: 12A 16A

额定电压: 125V 250V

接触电阻: 50MΩ

绝缘电阻: 100MΩ

操作力: 4-10N

耐电压: 1500V AC

电气寿命: 10000次

产品认证: UL TUV CE EK ROHS

⑪	静触点	1	AgNi10/Cu	2	
⑩	静片端子	1	H62Y2 t0.8		
⑨	支架端子	1	H62Y2 t0.8	1	D. Ag
⑧	动触点压簧	1	碳素弹簧钢丝70B组		镀白锌
⑦	按钮压簧	1	碳素弹簧钢丝70B组		镀白锌
⑥	动触点	1	AgNi10/Cu		
⑤	动触片	1	QSn6.5-0.1Y t0.8		D. Ag
④	定位钩	1	不锈钢丝 ρ0.5		
③	基座	1	PA66 FR50(黑色)		UL94V-0
②	盖板	1	PA66 FR50(黑色)		UL94V-0
①	按钮	1	PA66 FR50(黑色)		UL94V-0
序号	名称	数量	材质	端子编号	备注

8									
7									
6									
5									
4	CONTACT	SUS	1	Ag CLAD					
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED					
2	COVER	STEEL STRIP	1	Ni PLATED					
1	KNOB	PPA	1	BLACK					
NO.	PARTS	MATERIALS	Q'TY	FINISH					
					TOLERANCE				
					UNLESS SPECIFIED				
					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	
					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	
					TITLE : Push Switch			UNIT : mm	DRWG NO.: XB-KAG-03C21TB
					MODEL: XB-KAG-03C21TB			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
					东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
					DONG GUAN XI BANG ELECTRONICS CO., LTD.			APPD.	ZENQ. CHEN 2012-9-25